ZONING REVIEW SHEET

CASE: C14-07-0004 **Z.A.P. DATE**: March 20, 2007

April 3, 2007

ADDRESS: 13205 Burnet Road

OWNER: Tiger Creek Partners (David Downing) AGENT: A.J. Ghaddar, P.E. &

Associates (A.J. Ghaddar)

ZONING FROM: LR (Neighborhood commercial) district

TO: GR (Community Commercial) district

AREA: 3.30 Acres

<u>SUMMARY ZONING AND PLATTING COMMISSION RECOMMENDATION</u>:

April 3, 2007:

APPROVED STAFF'S RECOMMENDATION FOR GR-CO ZONING WITH CONDITIONS OF 3,000 VEHICLE TRIPS PER DAY; PROHIBIT PAWNSHOPS AND ALL AUTO RELATED USES.

Prohibited uses:

- Automotive Rentals;
- Automotive Repair Services;
- Automotive Sales;
- Automotive Washing (of any type);
- Service Station;
- Drive-in service as an accessory to a commercial use; and
- Pawn Shop Services

[J.MARTINEZ, J.SHIEH 2ND] (7-0) K.JACKSON, S.HALE – ABSENT

SUMMARY STAFF RECOMMENDATION:

Staff offers a recommendation of GR-CO. The recommended conditional overlay shall limit the daily vehicle trips to less than 5,506 per day. The Staff recommendation is based on the following observations:

- 1.) The proposed commercial zoning classification is compatible with existing commercial zoning classifications along Burnet Road;
- 2.) The proposed zoning classification will allow the acceptable land uses along a major transportation route; and
- 3.) Vehicle trip limitation will address potential traffic impacts.

DEPARTMENT COMMENTS:

The subject rezoning area consists of an undeveloped 3.28 acre site fronting Burnet Road and Scofield Ridge Parkway zoned LR. The applicant proposes to rezone the property GR to allow for a Shell food store / gasoline and service station to include a drive through Burger King. Access is proposed off Burnet Road and Scofield Ridge Parkway. The North Lamar Area study recommends commercial uses for this site.

EXISTING ZONING AND LAND USES:

	ZONING	LAND USES
Site	LR	Undeveloped land
North	GR	Undeveloped land
South	GR	Undeveloped land
East	MF-3-CO	Apartments
West	N/A	Burnet Road / Toll Roads

AREA STUDY: North Lamar

TIA: Please see Transportation comments

WATERSHED: Walnut Creek

DESIRED DEVELOPMENT ZONE: Yes

SCENIC ROADWAY: No

HILL COUNTRY ROADWAY: No

NEIGHBORHOOD ORGANIZATIONS:

55--Northwood Homeowners Assn.

64--River Oaks Lakes Estates Neighborhood

114--North Growth Corridor Alliance

742--Austin Independent School District

786--Home Builders Association of Greater Austin

903--Ridge @ Scofield Homeowners Assn. (The)

SCHOOLS:

Austin Independent School District

- Summitt Elementary School
- Murchison Middle School
- Anderson High School

RELATED CASES:

NUMBER	REQUEST	COMMISSION	CITY COUNCIL
C14-85-149	North Lamar	12/15/98: APVD STAFF REC	01/14/99: APVD PC REC OF
	Study Area	OF R.C. AMDMT (7-0)	AMENDING R. C. W/CONDITIONS
			(7-0)

CASE HISTORIES:

NUMBER	REQUEST	COMMISSION	CITY COUNCIL
C14-03-0188	GO to GR	2/03/04: APVD STAFF REC OF	3/04/04: APVD GR (6-0); ALL 3
		GR BY CONSENT (9-0)	RDGS

ABUTTING STREETS:

Name	ROW	Pavement	Classification	Sidewalks	Bike Route	Bus Route
Scofield Ridge	120'	90'	Arterial	Yes	No	Yes
MoPac	Varies	Varies	Expressway	No	No	No

CITY COUNCIL DATE:

May 3, 2007

ACTION:

This item was postponed to June 7, 2007 at the applicant's request (consent). 7-0

June 7, 2007

This item was postponed to August 23, 2007 at the Council's request.

August 23, 2007

ORDINANCE READINGS: 1st

 2^{nd}


 3^{rd}


ORDINANCE NUMBER:

CASE MANAGER: Jorge E. Rousselin, NPZD

PHONE: 974-2975

E-MAIL: jorge.rousselin@ci.austin.tx.us

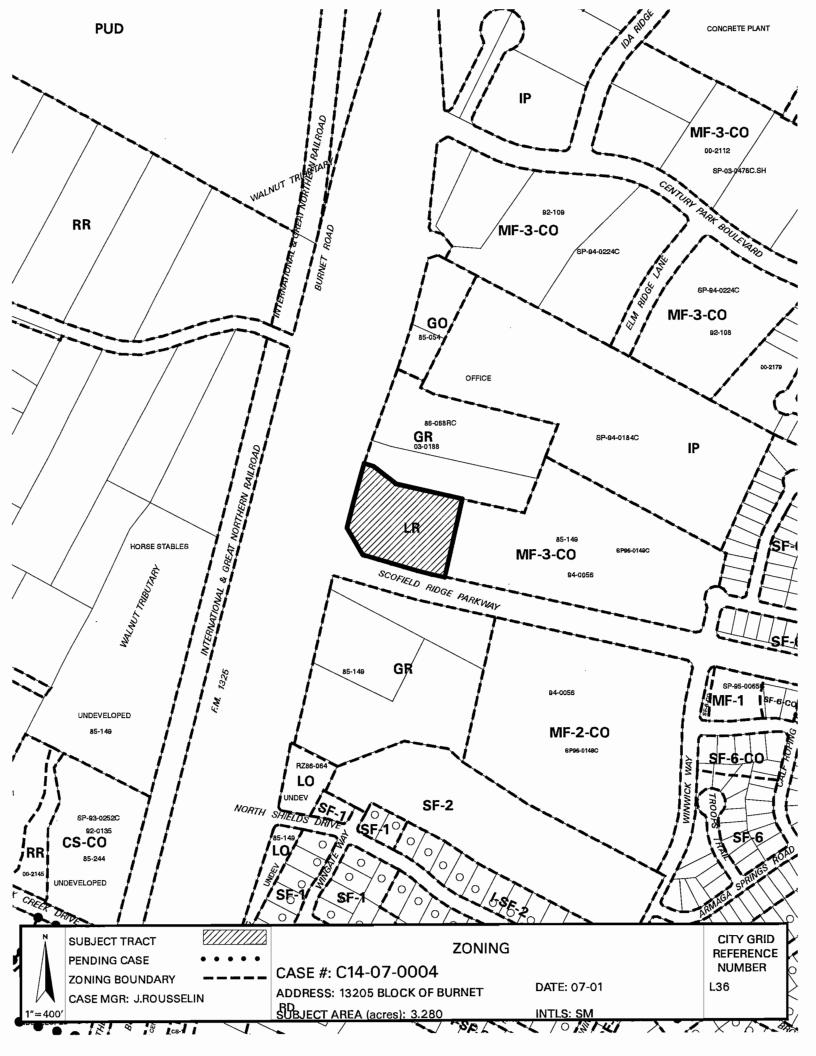

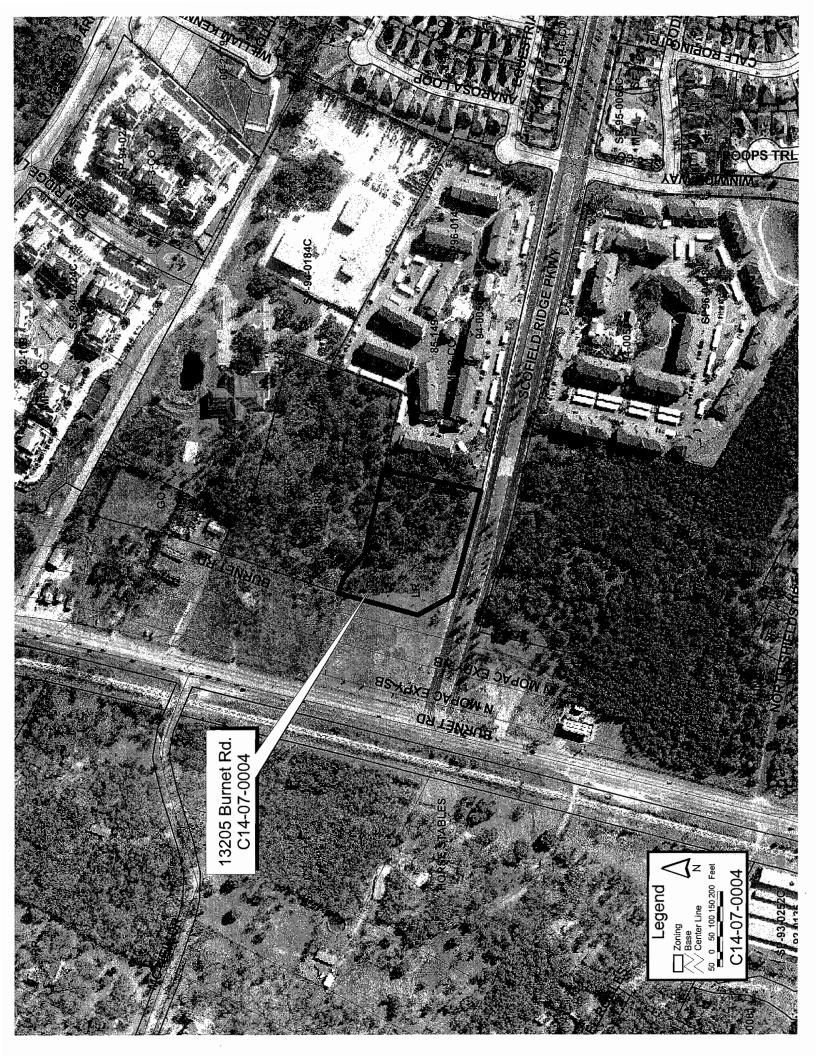



Date:

March 28, 2007

To:

Jorge Rousellin, Case Manager

CC:

Scott Feldman, Alliance Transportation Group

Reference:

Burger King/Shell Food Zoning Case, C14-07-0004

On February 7, 2007, transportation review staff received a Traffic Impact Analysis waiver request for the above referenced zoning application pursuant to Section 25-6-117 of the Land Development Code. A summary of staff's determination is provided below.

TRIP GENERATION

The Burger King/Shell Food Tract is a 3.28-acre development located in north Austin at the intersection of MoPac Expressway and Scofield Ridge Parkway.

The property is currently undeveloped and zoned Neighborhood Commercial (LR). The applicant has requested a zoning change to Community Commercial (GR) for the entire tract.

Based on the standard trip generation rates established by the Institute of Transportation Engineers (ITE), the development will generate approximately 5,506 unadjusted average daily trips (ADT).

The table below shows the adjusted trip generation by land use for the proposed development:

Table 1. Trip Generation								
LAND USE Size ADT AM Peak PI								
Shopping Center	11,500sf	1,562	43	98				
Convenience Store with Fuel Pumps	3,135sf	2,220	52	64				
Fast Food with Drive-Thru 2,400st		980	65	41				
	Total	4,762	160	203				

Pass-by reductions were taken for the following uses:

Table 2. Pass By Reduction				
Land Use		s-By ctions		
	АМ	PM		
Shopping Center	0%	34%		
Convenience Store with Fuel Pumps	63%	66%		
Fast Food with Drive Thru	49%	50%		

EXISTING AND PLANNED ROADWAYS

MoPac Expressway – MoPac was recently upgraded to a toll facility with frontage roads in the vicinity of this site. No additional improvements are currently proposed for this roadway.

Scofield Ridge Parkway – This roadway forms the southern border of the site and is classified as a four-lane divided major arterial with 120 feet of right-of-way.

Lamplight Village Avenue – This roadway, located two-thirds of a mile east of the proposed development, is classified as a neighborhood collector with 64 feet of right-of-way and 44 feet of pavement. Lamplight Village provides a north/south connection between Scofield Ridge Parkway and Metric Boulevard.

Based upon existing traffic patterns in the area, site traffic was distributed to the surrounding roadway network as follows:

Table 3. Site Traffic Distribution					
Direction	Percentage Inbound	Percentage Outbound			
MoPac	45%	45%			
Scofield Ridge WB	25%	25%			
Lamplight Village SB	25%	25%			
Lamplight Village NB	5%	5%			

INTERSECTION LEVEL OF SERVICE (LOS)

In order to consider a traffic impact analysis wavier for this case, transportation staff requested an intersection level of service analysis of the intersection of Lamplight Village Avenue and Scofield Ridge Parkway. Projected level of service is as follows:

Table 4. Intersection Level of Service				
Intersection AM Peak PM Peak				
Scofield Ridge at Lamplight Village A A				

CONCLUSIONS/RECOMMENDATIONS

- 1) The intersection of Scofield Ridge and Lamplight Village will perform at an acceptable level of service with the addition of site traffic.
- 2) Recent improvements to MoPac conform to the proposed cross section as identified in the Austin Metropolitan Area Transportation Plan (AMATP). In addition, Scofield Ridge Parkway is currently constructed as a four-lane divided major arterial as proposed in the AMATP. Therefore, no additional improvements were identified for the intersection of MoPac and Scofield Ridge Parkway.
- 3) The traffic impact analysis waiver request is granted with the following condition: development of this property should be limited to uses and intensities which will not exceed or vary from the projected traffic conditions, including peak hour trip generations, traffic distribution, roadway conditions, and other traffic related characteristics.

If you have any questions or require additional information, please contact me at 974-2628.

Amy Link
Sr. Planner ~ Transportation Review Staff
Watershed Protection and Development Review

Watershed Protection and Development Review Department CITY OF AUSTIN

TRAFFIC IMPACT ANALYSIS (TIA) DETERMINATION WORKSHEET

APPLICANT MUST FILL IN WORKSHEET PRIOR TO SUBMITTING FOR TIA DETERMINATION PROJECT NAME: Burger King/Shell Food Scofield Ridge Parkway LOCATION: APPLICANT: A.J. Ghaddar/Scott Feldman, PE **TELEPHONE NO.:** 821-2081 Fax: DEVELOPMENT ASSESSMENT X ZONING SITE PLAN **APPLICATION STATUS:** FOR OFFICE USE ONLY **EXISTING:** TRIPS PER TRACT **BUILDING** TRACT **TRIP RATE** NO. **ACRES** SQ. FT. **ZONING** LAND USE I.T.E. CODE DAY 1 **PROPOSED** FOR OFFICE USE ONLY TRIPS PER TRACT TRACT BUILDING TRIP I.T.E. CODE **ACRES** SQ. FT. **ZONING** LAND USE RATE DAY NO. 11,500sf Retail 820 1,665 3,135sf Convencience w/pumps 853 2,651 934 2,400sf Fast Food with Drive Thru 1,190 5,506 ABUTTING ROADWAYS FOR OFFICE USE ONLY STREET NAME PROPOSED ACCESS? PAVEMENT WIDTH CLASSIFICATION Scofield Ridge Parkway Yes MoPac Yes FOR OFFICE USE ONLY A traffic impact analysis is required. The consultant preparing the study must meet with a transportation planner to discuss the scope and requirements of the study before beginning the study. A traffic impact analysis is NOT required. The traffic generated by the proposal does not meet or exceed the thresholds established in the Land Development Code. Х The traffic impact analysis has been waived for the following reason(s): a level of service analysis was performed for the intersection of Scofield Ridge and Lamplight Village, and with the addition of site traffic, this intersection will continue to function at an acceptable level of service. This site shall be limited to 5,506 vehicle trips per day. The traffic impact analysis has been waived because the applicant has agreed to limit the intensity to 2,000 vehicle trips A neighborhood traffic analysis will be performed by the City for this project. The applicant may have to collect existing traffic counts. See a transportation planner for information.

NOTE: A TIA determination must be made prior to submittal of any zoning or site plan application to Planning; therefore, this completed and reviewed form must accompany any subsequent application for the IDENTICAL project. CHANGES to the proposed project will REQUIRE a new TIA determination to be made.

CAP. METRO

Travis Co./Williamson Co.

REVIEWED BY: DISTRIBUTION:

FILE

TRANS. REV.

DATE: March 15, 2007

TxDOT

TPSD

COPIES:

0



TECHNICAL MEMORANDUM

To:

Ms. Amy Link

City of Austin

Watershed Protection and Development Review

505 Barton Springs Road Austin, Texas 78704

From: Scott A. Feldman, P.E., P.T.O.E

Alliance Transportation Group, Inc. 100 East Anderson Lane, Suite 300


Austin, Texas 78752

Date:

March 13, 2007

Re:

Scofield Ridge Retail Development



Introduction

Alliance Transportation Group, Inc. has been retained to prepare a Traffic Analysis for the proposed Scofield Ridge Retail Development. The development is located on Scofield Ridge Road to the east of Loop 1. The site is proposed to contain a Convenience Store with Pumps and Fast Food with Drive-Thru and General Retail. Figure 1 shows the site in relation to the surrounding roadway network. Figure 2 shows the Site Plan for the development. Table 1 summarizes the proposed land uses for the site. Table 2 shows the exiting and entering volumes calculated from the ITE's Trip Generation Manual, 7th Edition.

Table 1. Proposed Land Use Summary

Land Use Summary						
ITE Use ITE Description Qty Uni						
820	Shopping Center	11.5	KSF			
853	Convenience Store With Pumps	3.135	KSF			
934	Fast Food With Drive-Thru	2.4	KSF			

Table 2: Unadjusted ITE Trip Generation (based on equation)

ITE Description	24 Hour	AM Peak Volumes			PM Peak Volumes		
TTE Description	Volumes	Total	Enter	Exit	Total	Enter	Exit
Specialty Retail	1,665	43	26	17	150	72	78
Convenience Store With Pumps	2,651	142	71	71	190	95	95
Fast Food With Drive-Thru	1,190	127	65	62	83	43	40
	5,506	312	162	150	423	210	213

Pass-by and internal trips can account for a significant portion of a site's generated traffic. Pass-by trips are attracted to the site from traffic passing on an adjacent street. Internal trips are trips that use only internal roadways within the site traveling from one land use to another. To obtain a conservative analysis, no

Figure 1. Site Location

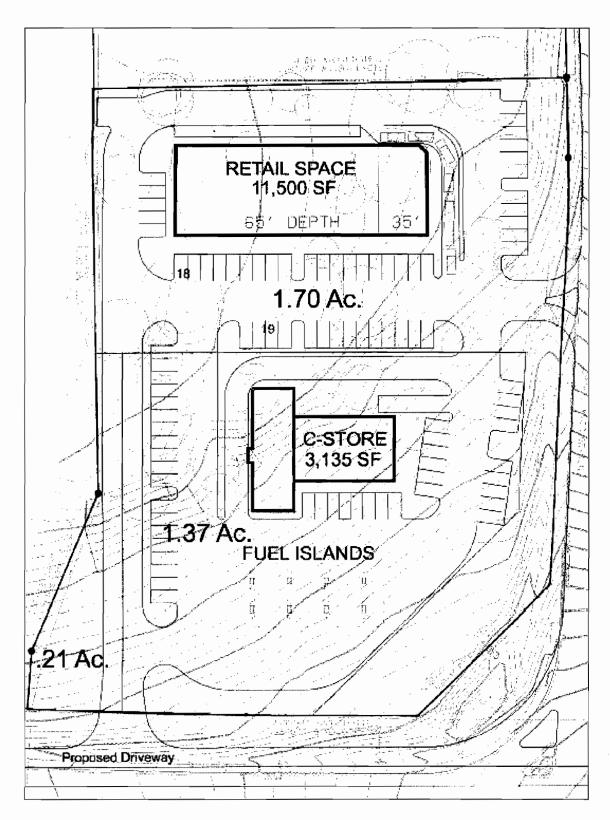


Figure 2. Site Plan



adjustment for internal capture was applied. Adjustment rates for pass-by traffic are shown in **Table 3**. Adjusted trip generation is shown in **Table 4**.

Table 3: Pass-By Rates

ITE	Pass-By Reduction		
DESCRIPTION	AM	PM	
Shopping Center	0.0%	34.0%	
Convenience Market w Pumps	63.0%	66.0%	
Fast Food w Drive-Thru	49.0%	50.0%	

Table 4: Adjusted ITE Trip Generation

ITE Description	24 Hour	AM Peak Volumes			PM Peak Volumes		
ITE Description	Volumes	Total	Enter	Exit	Total	Enter	Exit
Shopping Center	1,562	43	26	17	98	46	52
Convenience Store With Pumps	2,220	52	26	26	64	32	32
Fast Food With Drive-Thru	980	65	34	31	41	22	19
	4,762	160	86	74	203	100	103

Trip Distribution

Trip distribution takes into account where the vehicles generated by the site are going to or coming from based on the roadway network. Distribution percentages were developed based on the existing traffic pattern on Scofield Ridge. Next, all future site traffic was distributed using these percentages. **Table 5** shows the site trip distribution.

Table 5. Site Trip Distribution

Direction	Perc	entage
	Inbound	Outbound
Loop 1	45%	45%
Scofield Ridge WB	25%	25%
Lamplight Village SB	25%	25%
Lamplight Village NB	5%	5%

Intersection Analysis

The next step of the analysis is to combine the projected background traffic with the proposed site generated traffic and perform the intersection analyses. The results of this analysis are presented in **Table 4**. The worksheets from this analysis are included in the Appendix.

Table 6: Levels of Service (2007)

_	Tymo of		Level of	Service
Intersection	Type of Control	Movement	AM	PM
	Control		Peak	Peak
		EB	Α	Α
Casfield Didge & Lamplicht Willege	I In signalized	WB	A	Α
Scofield Ridge & Lamplight Village	Un-signalized	NB	С	С
		SB	С	В



As indicated in **Table 6** above, no geometric improvements will be required to accommodate site traffic in the year 2007. Based on the findings of this study, it our recommendation that the Scofield Ridge Retail Development be approved as planned.



Alliance Transportation Group, Inc. 100 E. Anderson Lane, Suite 300 Austin, TX 78752

File Name: LAMPLIGHT VILLAGE-SCOFIELD RIDGE_12-06-06_AM Site Code: 000000000 Start Date: 12/6/2006 Page No: 1

			tal	133	65	88	.63	46	27	159	46	20	52		1401		
			Int Total	1		_	7		- 5	_	_	_	9		14		
			App. Total	37	46	47	48	178	29	29	32	26	116		294		21
	DGE		Peds	0	0	0	0	0	0	0	0	0	0		0	0	0
	SCOFIELD RIDGE	Eastbound	Right	6	9	16	16	47	10	10	7	2	32		79	56.9	9.6
	SCOF	E.	Thru	28	40	30	32	130	19	19	25	. 21	84		214	72.8	15.3
			Left	0	0	1	0		0	0	0	0	0		-	0.3	0.1
			App. Total	56	32	22	48	128	40	33	56	22	121	•	249		17.8
	LLAGE		Peds	0	0	0	0	0	0	0	0	0	0		0	0	0
	AMPLIGHT VILLAGE	Northbound	Right	17	22	. 16	37	92	78	13	15	16	72		164	62.9	11.7
	LAMPL	Σ No	Thru	-	-	0	3	5	0	_	7	-	4		6	3.6	9.0
nshifted			Left	«	6	9	«	31	12	19	6	2	45		9/	30.5	5.4
Printed- L			App. Total	63	75	112	157	407	149	6	82	69	393	٠	800		57.1
Groups	RIDGE		Peds /	0	0	0	0	0	0	0	0	0	0		0	0	0
	(ELD	Westbound	Right	0	-	-	3	5	2	-	-	0	4		6	1.1	9.0
	SCOF	W	Thru	55	47	9	109	271	102	54	61	55	272		543	67.9	38.8
			Left	∞	27	51	45	131	45	35	23	14	117		248	31	17.7
			App. Total	7	12	7	10	36	6	7	3	3	22		28		4.1
	LLAGE		Peds 4	0	0	0	0	0	0	0	0	0	0		0	0	0
	LAMPLIGHT VILLAGE	Southbound	Right.]	2	_	7	0	5	4	-	0	1	9		Ξ	19	8.0
	AMPLI	Sou	Thru	4	7	7	3	16	-	2	7	_	6		25	43.1	1.8
	•		Left	-	4	33	7	15	4	-	-	1	7		22	37.9	1.6
			Start Time	07:00 AM	07:15 AM	07:30 AM	07:45 AM	Total	08:00 AM	08:15 AM	08:30 AM	08:45 AM	Total		Grand Total	Apprch %	Total %

		LAMP	LAMPLIGHT VILLAGE	/ILLAG	B		SCO	SCOFIELD RIDGE	IDGE			LAMPI	LAMPLIGHT VILLAGE	TLLAGE	.,		SCOI	SCOFIELD RIDGE	IDGE		
		2	Southbound				>	Westbound				Ž	Northbound				2	Eastbound			
Start Time		Thru	Right	Peds	Left Thru Right Peds App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total Int. Total	Int. Total
Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1	3 From 07:(00 AM to	o 08:45 AN	M - Peak	1 of 1																
Peak Hour for Entire Intersection Begins at 07:15 AM	e Intersect	ion Begi	ns at 07:15	5 AM																	
07:15 AM	4	7	-	0	12	27	47	-	0	75	6		22	0	32	0	40	9	0	46	
07:30 AM	3	2	2	0	7	21	09	-	0	112	9	0	16	0	22	-	30	16	0	47	188
07:45 AM	7	3	0	0	10	45	109	3	0	157	∞	3	37	0	48	0	32	16	0	48	
08:00 AM	4	-	4	0	6	45	102	2	0	149	12	0	28	0	40	0	19	10	0	29	
Total Volume	18	13	7	0	38	168	318	7	0	493	35	4	103	0	142	1	121	48	0	170	
% App. Total	47.4	34.2	18.4	0		34.1	64.5	1.4	0		24.6	2.8	72.5	0		9.0	71.2	28.2	0		
HID	643	464	464 438	000	707	824	770	583	000	785	770	333	707	000	740	250	756	750	000	200	801



Alliance Transportation Group, Inc. 100 E. Anderson Lane, Suite 300 Austin, TX 78752

File Name: LAMPLIGHT VILLAGE-SCOFIELD RIDGE_12-06-06_PM Site Code: 000000000 Start Date: 12/6/2006 Page No: 1

hifted	
d- Uns	
Printe	
Groups	

		LAMP	LAMPLIGHT VILLAGE	'ILLAG	H		SCOF	FIELD RIDGE	IDGE		Γ	AMPLIG	LAMPLIGHT VILLAGE	LAGE			SCOFI	SCOFIELD RIDGE	GE	_	
		Š	Southbound	p			*	Westbound	_			No	Northbound		-		Eas	Eastbound			
Start Time	Left	Thru	Right	Peds	Peds App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds Ap	App. Total	Left	Thru	Right	Peds A	App. Total	Int. Total
04:00 PM	2	2	က	0	7	22	23	-	0	46	2	4	17	0	56	0	40	4	0	44	123
04:15 PM	_	0	0	0	_	17	56	Ψ-	0	44	9	-	22	0	58	-	36	12	0	49	123
04:30 PM	_	7	0	0	က	52	27	0	0	25	10	7	. 42	0	4	-	33	9	0	40	136
04:45 PM	4	4	-	0	6	22	37	က	0	62	7	7	22	0	36	-	44	4	0	26	166
Total	8	8	4	0	20	98	113	5	0	204	28	19	85	0	132	3	153	36	0	192	548
05:00 PM	-	-	c	c	0	16	28	4	c	48	8	7	43	c	89	~	44	16	_	-	179
05:15 PM	0	. ო	0	0	ı m	3.5	3 8	-	0	93.	15		9	0	62	٠,	29	9 6	0	26	207
05:30 PM	-	0	0	0	~~	22	46	2	0	20	20	2	36	0	61	Ψ-	43	13	0	22	189
05:45 PM	-	5	0	0	9	56	33	7	0	61	13	4	30	0	47	_	45	16	0	29	173
Total	က	6	0	0	12	95	138	6	0	242	99	23	149	0	238	4	188	64	0	256	748
H	;	,	•	(6	3	į	;	ď	•	?	9	Š	ć	1	ı	3	9	ď	9,	7
Grand lotal	Ξ		4	>	35	0	107	4	>	440	45	47	434	>	3/0	_	45	100	>	448	1236
Apprch %	34.4	53.1	12.5	0		40.6	56.3	3.1	0		25.4	11.4	63.2	0		1.6	76.1	22.3	0		
Total %	0.8	1.3	0.3	0	2.5	4	19.4	[0	34.4	7.3	3.2	18.1	0	28.5	0.5	26.3	7.7	0	34.6	

		LAMPL	LAMPLIGHT VILLAGE	ILLAGE	닭		SCOF	SCOFIELD RIDGE	DGE			AMPLI	LAMPLIGHT VILLAGE Northbound	LAGE			SCO	SCOFIELD RIDGE	DGE		
Start Time	Left	Thru	Right	Peds	Left Thru Right Peds App. Total	Left	Fla	Right	Peds	App. Total	Left	Thru	Right	spac	App. Total	Left	Thr.	Right	Peds	App. Total	Int. Total
Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1	is From 0	4:00 PM	to 05:45	PM - Pe	ak 1 of 1																
Peak Hour for Entire Intersection Begins at 05:00 PM	ire Interse	ction Be	gins at 05	5:00 PM																	
05:00 PM	-	-	0	0	2	16	28	4	0	48		7	43	0	89	-	44		0	-10	179
05:15 PM	0	က	0	0	က	31	31	-	0	63		7	40	0	62	_	29		0	79	207
05:30 PM	-	0	0	0	_	22	46	7	0	70		2	36	0	19	_	43		0	22	189
05:45 PM	1	2	0	0	9	56	33	7	0	61		4		0	47	_	42		0	29	173
Total Volume	3	6	0	0	12		138	6	0	242	99	23	149	0	238	4	188	64	0	256	748
% App. Total	25	22	0	0		39.3	22	3.7	0			9.7		0		1.6	73.4		0		
岩	.750	.450	000	000	200	992	750	563	000	864		821		000	875	1,000	797		000	810	903

	٠	→	•	•	+	•	•	†	<i>*</i>	>	ţ	- ✓
Movement	·EBL	EBIE	EBR	SATISFIED SALVEYS	THE PROPERTY AND PROPERTY OF THE PERSON OF T	WBR	NBL		NBR	. SBL:	-SBT	SBR
Lane Configurations	, A	† }		J.	^	_		4			4	
Sign Control		Free			Free			Stop			Stop	
Grade Volume (veh/h)	5	0% 146	69	176	0% 357	7	60	0% 4	108	19	0% 14	11
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Hourly flow rate (vph)	5	159	75	191	388	8	65	4	117	21	15	12
Pedestrians												
Lane Width (ft)												
Walking Speed (ft/s) Percent Blockage												
Right turn flare (veh)												
Median type					*		F	Raised		F	Raised	
Median storage veh)								. 1			1	
Upstream signal (ft)												
pX, platoon unblocked vC, conflicting volume	396			234			803	985	117	984	1019	198
vC1, stage 1 conf vol	330			254			207	207	1 17	774	774	190
vC2, stage 2 conf vol							596	778		210	245	
vCu, unblocked vol	396			234			803	985	117	984	1019	198
tC, single (s)	4.1			4.1			7.5	6.5	6.9	7.5	6.5	6.9
tC, 2 stage (s) tF (s)	2.2			2.2			6.5 3.5	5.5 4.0	3.3	6.5 3.5	5.5 4.0	3.3
p0 queue free %	100			86			79	98	3.3 87	91	94	99
	1159			1331			307	287	913	235	274	810
Direction Lane#	EB 1	EB-2	EB 3	WB 1	WB 2	WB3	NB1	SB 1		in the second		gen or
Volume Total	5	106	128	191	259	137	187	48	CHISCOST CONTRACTOR	THE PERSON NAMED IN PARTY OF		A PARAMATIKAN
Volume Left	5	0	0	191	0	0	65	21				
Volume Right	0	0	75	0	0	. 8	117	12				
cSH Volume to Capacity	1159	1700 0.06	1700 0.08	1331 0.14	1700 0.15	1700 0.08	525 0.36	302 0.16				
Queue Length 95th (ft)	0.00	0.00	0.00	13	0.13	0.00	40	14				
Control Delay (s)	8.1	0.0	0.0	8.2	0.0	0.0	15.6	19.1				
Lane LOS	Α			Α			. C	С				
Approach Delay (s)	0.2			2.7			15.6	19.1				
Approach LOS							С	С				
Intersection Summary		100			and the same	4.0					N VALUE	10000
Average Delay			F 4			Concerning to the control of the con	D. D. S. L. D. S. C. L. S. C.		32,000,000,000,000			
Intersection Capacity Util	ization		5.1 38.1%	10	CILLEVE	el of Ser	vice		Α			

	٠	→	•	•	—	4	4	†	<i>></i>	\	+	1
Movement	EBL	EBI	EBR	WBL	WBT	-WBR	- NBL	NBT	NBR	. SBL∞	SBT	SBR
Lane Configurations	ሻ	4 1	-	ሻ	† ‡			4			4	
Sign Control		Free			Free			Stop			Stop	
Grade		0%			0%	_		0%		_	0%	
Volume (veh/h)	10	223	93	100	171	9	95	24	156	3	9	5
Peak Hour Factor	0.92 11	0.92 242	0.92	0.92	0.92 186	0.92	0.92	0.92 26	0.92	0.92	0.92	0.92
Hourly flow rate (vph) Pedestrians	- ''	242	101	109	100	10	103	26	170	3	10	5
Lane Width (ft)												
Walking Speed (ft/s)							-					
Percent Blockage												
Right turn flare (veh)												-
Median type							F	Raised		F	Raised	
Median storage veh)								1			1	
Upstream signal (ft)												
pX, platoon unblocked	196			0.40			625	728	172	704	770	00
vC, conflicting volume vC1, stage 1 conf vol	190			343			635 315	726 315	1/2	734 408	773 408	98
vC2, stage 2 conf vol							321	413		326	365	
vCu, unblocked vol	196			343			635	728	172	734	773	98
tC, single (s)	4.1			4.1			7.5	6.5	6.9	7.5	6.5	6.9
tC, 2 stage (s)							6.5	5.5		6.5	5.5	
tF (s)	2.2			2.2			3.5	4.0	3.3	3.5	4.0	3.3
p0 queue free %	99			91			76	94	80	99	97	99
cM capacity (veh/h)	1375			1212			431	406	842	302	374	939
Direction Lane#	EBA	EB2	EB3	WB1	WB 2-	WB3	NB ₁	SB4		10.43.	and the	
Volume Total	11	162	182	109	124	72	299	18				
Volume Left	11	0	0	109	0	0	103	3				
Volume Right cSH	0 1375	0 1700	101 1700	0 1212	0 1700	10 1700	170 592	5 433				
Volume to Capacity	0.01	0.10	0.11	0.09	0.07	0.04	0.51	0.04				
Queue Length 95th (ft)	1	0.10	0.11	7	0.07	0.04	71	3				
Control Delay (s)	7.6	0.0	0.0	8.3	0.0	0.0	17.1	13.7				
Lane LOS	Α			A			C	В				
Approach Delay (s)	0.2			3.0			17.1	13.7				
Approach LOS							С	В				
Inteliseedon Sülmimelay I	all in			los (Techto)		e e e e e e e e e e e e e e e e e e e	6.03 s		7747			. Zaja
Average Delay			6.5									
Intersection Capacity Ut	ilization		47.4%	IC	U Leve	of Ser	vice		Α			
Analysis Period (min)			15									

STAFF RECOMMENDATION

Staff offers a recommendation of GR-CO. The recommended conditional overlay shall limit the daily vehicle trips to less than 5,506 per day. The Staff recommendation is based on the following observations:

- 1.) The proposed commercial zoning classification is compatible with existing commercial zoning classifications along Burnet Road;
- 2.) The proposed zoning classification will allow the acceptable land uses along a major transportation route; and
- 3.) Vehicle trip limitation will address potential traffic impacts.

BASIS FOR RECOMMENDATION

1. The proposed zoning should be consistent with the purpose statement of the district sought.

§ 25-2-98 COMMUNITY COMMERCIAL (GR) DISTRICT DESIGNATION. Community commercial (GR) district is the designation for an office or other commercial use that serves neighborhood and community needs and that generally is accessible from major traffic ways.

The property meets the purpose statement set forth in the Land Development Code. The proposed rezoning will incorporate a commercial use that will be situated at the intersection of a major expressway and an arterial roadway.

2. The proposed zoning should promote consistency, and orderly planning.

Other properties in the immediate vicinity are zoned for commercial uses. The recommended zoning classification and conditional overlay will promote land use compatibility in the area.

EXISTING CONDITIONS

Site Characteristics

The subject rezoning area consists of an undeveloped 3.28 acre site fronting Burnet Road and Scofield Ridge Parkway zoned LR. The applicant proposes to rezone the property GR to allow for a Shell food store / gasoline and service station to include a drive through Burger King. Access is proposed off Burnet Road and Scofield Ridge Parkway. The North Lamar Area study recommends commercial uses for this site.

Transportation

1. A traffic impact analysis was waived for this site because a level of service analysis was performed for the intersection of Scofield Ridge and Lamplight Village, and with the addition of site traffic, the intersection will continue to function at an acceptable level of service. In addition, due to the recent improvements to MoPac in the vicinity of this site, no additional improvements could be identified at the intersection of Scofield Ridge Parkway and MoPac. If the zoning is granted, development should be limited through a conditional overlay to no more than 5,506 vehicle trips per day.

Environmental and Impervious Cover

1. The site may be located over the northern Edward's Aquifer Recharge Zone. The site is in the Desired Development Zone. The site is in the Walnut Creek Watershed of the Colorado River Basin, which is classified as a Suburban Watershed by Chapter 25-8 of the City's Land Development Code. Under current watershed regulations, development or redevelopment on this site will be subject to the following impervious cover limits:

Development Classification	% of Net Site Area	% with Transfers
Single-Family	50%	60%
(minimum lot size 5750 sq. ft.)		
Other Single-Family or Duplex	55%	60%
Multifamily	60%	70%
Commercial	80%	90%

- 2. According to flood plain maps, there is a floodplain within, or adjacent to the project boundary. Based upon the close proximity of flood plain, offsite drainage should be calculated to determine whether transition zone exists within the project location. If transition zone is found to exist within the project area, allowable impervious cover within said zone should be limited to 30%.
- 3. Standard landscaping and tree protection will be required in accordance with LDC 25-2 and 25-8 for all development and/or redevelopment.
- 4. At this time, site specific information is unavailable regarding existing trees and other vegetation, areas of steep slope, or other environmental features such as bluffs, springs, canyon rimrock, caves, sinkholes, and wetlands.
- 5. Under current watershed regulations, development or redevelopment on this site will be subject to the following water quality control requirements:
 - Structural controls: Sedimentation and filtration basins with increased capture volume and 2 year detention.
- 6. At this time, no information has been provided as to whether this property has any preexisting approvals that preempt current water quality or Code requirements.

Water and Wastewater

1. The landowner intends to serve the site with City of Austin water and wastewater utility service. The landowner, at own expense, will be responsible for providing the water and wastewater utility improvements, offsite main extension, system upgrades, and utility adjustments. The water and wastewater utility plan must be reviewed and approved by the Austin Water Utility. The plan must be in accordance with the City utility design criteria. The water and wastewater utility construction must be inspected by the City. The landowner must pay all applicable and associated City fees.

Site Plan

1. No issues at this time.