



**Recommendation for
Water & Wastewater Commission**

Commission Meeting Date:	August 9, 2017
Council Meeting Date:	August 17, 2017
Department:	Public Works
SUBJECT	
<p>Authorize negotiation and execution of an amendment to the existing Interlocal Agreement between the City of Austin and the Texas Department of Transportation (TXDOT) for the US 290 Improvements at Texas State Highway 71, William Cannon Drive, and Joe Tanner Road project to increase the amount by \$214,291.55 for a total Interlocal Agreement amount not to exceed \$1,186,147.55. (District 8)</p>	
AMOUNT AND SOURCE OF FUNDING	
<p>Funding in the amount of \$214,291.55 is available in the Fiscal Year 2016-2017 Capital Budget of Austin Water.</p>	
Purchasing Language:	N/A
Prior Council Action:	December 13, 2012- Council approved an interlocal agreement between the City of Austin and the Texas Department of Transportation for relocation of existing water and wastewater lines in conflict with the US 290 Intersection Improvements at Texas State Highway 71, William Cannon Drive, and Joe Tanner Road.
For More Information:	Jessica Salinas, 512-974-7646; Aldo Ranzani, 512-972-1122
Boards and Commission Action:	August 9, 2017- To be reviewed by the Water and Wastewater Commission.
MBE/WBE:	N/A

In December 2012, an interlocal agreement between the City of Austin and the Texas Department of Transportation (TXDOT) was executed to provide funding for the relocation of existing City of Austin water lines in conflict with TXDOT's improvements to the US 290 intersections at William Cannon Drive and Joe Tanner Road.

With construction completed, the Final Statement of Cost for the City's portion of the project is \$1,186,147.55 resulting in the need for an additional \$214,291.55 to cover the balance. These additional costs are a result of the following item quantity overruns and a change order.



During construction, an unforeseen existing shallow 14-inch concrete steel cylinder water pipe was uncovered under the pavement section. This required abandonment of this existing 14-inch water line and an adjoining existing 12-inch asbestos cement water line. A new 16-inch water line was installed in this area to allow for two way feed of the system.

The change order also included adjustment of a 48 inch manhole that was not identified on the plans, extending jacking and boring of a 36-inch diameter steel casing due to unforeseen conditions, and other minor various item quantity overruns including 6-inch ductile iron pipe, 16-inch diameter factory restrained joint ductile iron pipe, 16-inch by 14-inch wet connection, 16-inch by 8-inch wet connection, 16-inch diameter gate valve, 6-inch diameter gate valve, ductile iron fittings, and barricades.

This amendment to the interlocal agreement provides for final payment and closeout of the TXDOT US 290 Improvements at Texas State Highway 71, William Cannon Drive, and Joe Tanner Road project.

The TXDOT project began construction in October 2013 and construction has now been completed.

This project is located within zip code 78741 (District 8) and is managed by the Public Works Department.

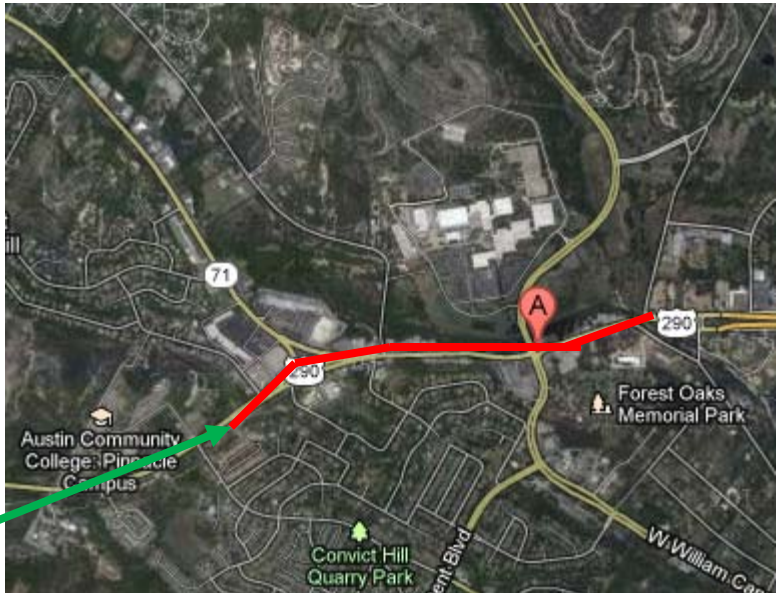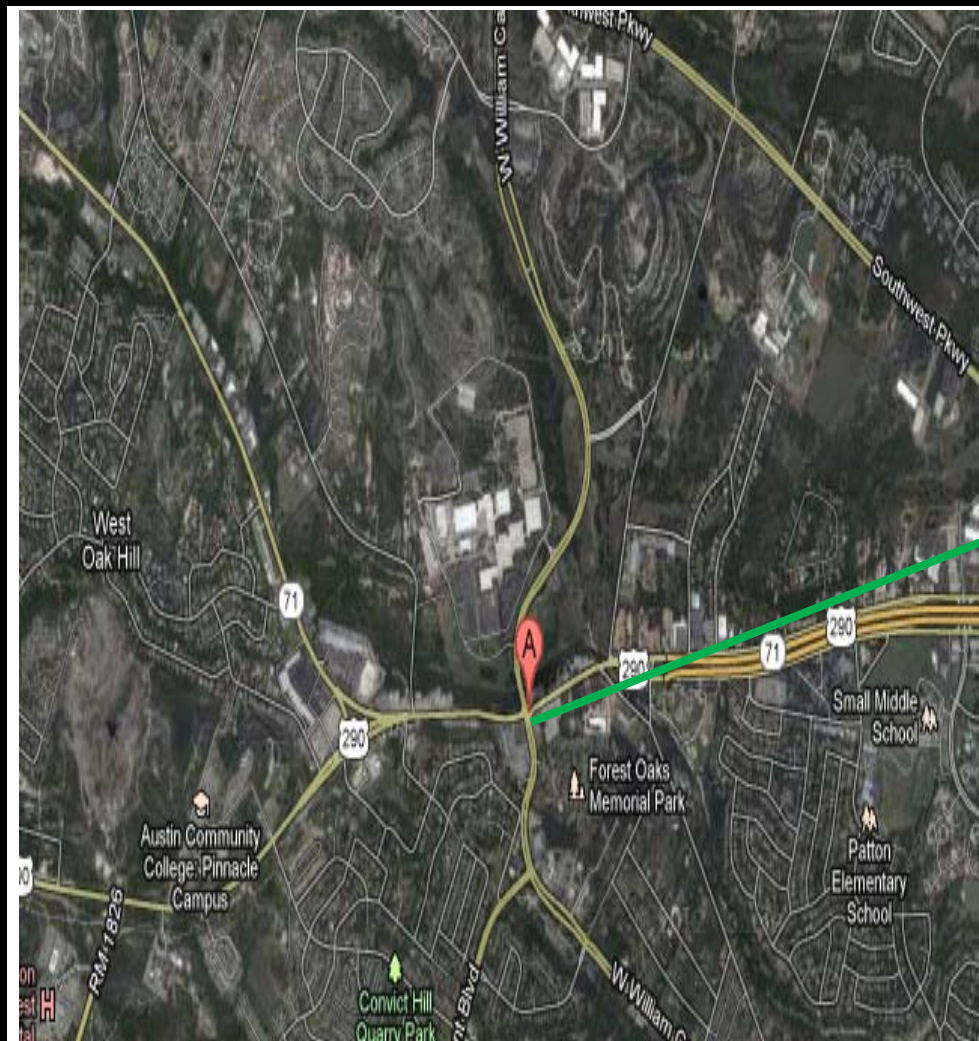

ZIP CODE (78741) – US 290 at SH71, William Cannon, and Joe Tanner



US 290 Intersection Improvements at SH71, William Cannon, and Joe Tanner

