CITY OF AUSTIN PUBLIC WORKS

Boggy Creek & MLK Stormwater Improvements Phase 2 – CIP: 8598.013

Feb. 24, 2022
Via Zoom








Meeting Agenda

- Welcome and Logistics
- Project Team Introductions
- Project Overview
- Questions and Answers
- Conclusion

Welcome and Logistics

Please...

- Keep your microphones muted and cameras off
- Place questions in the chat



- Note that we will answer questions at the end of the meeting
- Note that any questions we are not able to answer, we will provide a written response to ASAP
- Use the link in the chat to sign up for future updates about this project

Introductions

Matt Hart – Public Information Specialist, Public Works

Laurie Thering, P.E. – Project Manager, Public Works

Robert Wood – Inspector, Public Works

Glen Taffinder, P.E. – Engineer, Watershed Protection

Kim Patak, P.E. – Engineer of Record, Freese and Nichols, Inc.

Ron Grier – Project Manager, Facilities Rehabilitation, Inc. (General Contractor for the project)

Project Overview

The work consists of, but is not limited to, storm drain, open channel, roadway and utility improvements associated with the installation of a new storm drain system.

These improvements aim to upgrade infrastructure and provide flood reduction benefits within the project area.

Features:

- 3600 linear feet of reinforced concrete pipe storm drains
- 1200 linear feet of reinforced concrete box storm drains
- 3100 linear feet of water main
- 2200 linear feet of wastewater main
- 9 water quality units

Project Location



What to Expect During Construction

Construction Overview: The contractor will use heavy equipment to dig trenches for new storm drain improvements, water and wastewater lines. Pavement will be restored as appropriate for the work being done.

Construction Phases: Crews will work in front of your property a number of times to complete each phase of the project, including excavation, storm drain and pipe installation, temporary paving, testing, repairs, if necessary, and final paving.

Right of Way: Most work will be limited to the right of way. The right of way spans from the street to a minimum of 10 feet behind the curb, in an area that you may consider to be part of your lawn.


What to Expect During Construction

Traffic: During construction, travel on project streets will be impacted and may be reduced to one way traffic. You will always have access to your property - for brief periods, driveway access may be limited.

Water Service: At some point your water will be turned off to connect to the new line, but most likely just for a few hours on a single day. We will notify you via flyers posted on the door, prior to turning off the water. Emergency outages are possible should a water line break during construction.

Project timeframe: This project is anticipated to take 19 months to complete.

What to Expect During Construction

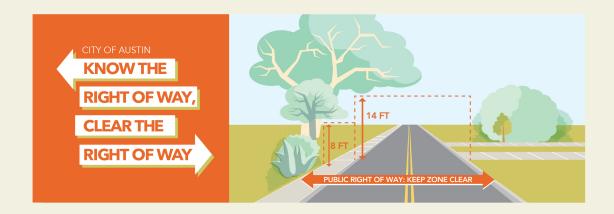

Tree Trimming: The contractor may need to do some tree trimming over the Right of Way where trees are hanging lower than 14 feet.

Project Contacts

The Construction Inspector is the primary point of contact for residents in the project area. The Inspector oversees the day-to-day construction operations of this project. We strive to maintain direct communication with residents and will remain available for any questions or concerns.

Robert Wood – Construction Inspector Robert.Wood@austintexas.gov 512-745-1141 (cell)

Laurie Thering – Project Manager Laurie.Thering@austintexas.gov 512-974-7035



Chat

Please let us know if you have any questions in the chat.
Thank you!

CITY OF AUSTIN
PUBLIC WORKS DEPARTMENT

QUESTIONS + ANSWERS

Visit AustinTexas.gov/BoggyMLK to follow the project and sign-up for updates

