CITY OF AUSTIN PUBLIC WORKS

SAFE ROUTES TO SCHOOL

INFRASTRUCTURE REPORT

CITY COUNCIL DISTRICT 4

DRAFT

austin MOTION 2016 MOBILITY BOND

CITY OF AUSTIN FOUNDED 1839

ACKNOWLEDGMENTS

September 2019

This report is made possible through the Austin 2016 Mobility Bond. For more information, please contact:

Carolynn Calabrese
Public Information Specialist Sr.
City of Austin Public Works
(512) 974-6512
Carolynn.Calabrese@austintexas.gov

Amir Emamian
City of Austin
Safe Routes to School
(512) 974-9319
Amir.Emamian@austintexas.gov

The consultant team was led by Toole Design Group with support from Asakura Robinson, Dunaway|UDG, GGE Consulting, and Adisa Communications.

DRAFT

CONTENTS

City Council District 4

About this Project 1
Purpose / Background 1
School Audits 1
Public Engagement 2
Online Interactive Map 2
Summary of Responses 2
Pop-Up Meetings 4
Prioritization 4
Prioritization Summary 5
Next Steps 5

Recommended Safe Routes to School Projects 6

Map 4A: Barrington Elementary 7
Map 4A: Dobie Middle 8
Map 4A: Guerrero Thompson Elementary 9
Map 4A: Hart Elementary 10
Map 4A: Walnut Creek Elementary School 11
Table of Recommendations - School Group 4A 12

Map 4B: Blanton Elementary 24
Map 4B: TA Brown Elementary 25
Map 4B: Pickle Elementary 26
Map 4B: Reilly Elementary 27
Map 4B: Webb Elemntary, Webb Middle 28
Table of Recommendations - School Group 4B 29

Map 4C: Cook Elementary 50
Map 4C: McBee Elementary 51
Map 4C: Padron Elementary 52
Map 4C: Wooldridge Elementary 53
Table of Recommendations – School Group 4C ... 54

DRAFT

THIS PAGE INTENTIONALLY LEFT BLANK

DRAFT

ABOUT THIS PROJECT

PURPOSE / BACKGROUND

In November 2016, Austin voters approved the 2016 Mobility Bond which provided $27.5 million for Safe Routes to School improvements. The funding will be equally allocated for school access-related projects in Austin's ten City Council districts.

To identify projects, the City of Austin hired consultants to evaluate and prioritize improvements to streets, trails, intersections and sidewalks around 136 elementary and middle schools in the City. The City also conducted a robust public engagement effort to inform recommendations, as described later in this report. The project is taking place over two years and was divided into phases based on the school calendar, with two to three council districts in each phase.

- **Phase 1: Fall 2017** – Council Districts 1 and 10, 28 schools
- **Phase 2: Spring 2018** – Council Districts 2, 8 and 9, 40 schools
- **Phase 3: Fall 2018** – Council Districts 3, 5 and 7, 36 schools
- **Phase 4: Spring 2019** – Council Districts 4 and 6, 32 schools

This report explains the process used to develop the recommendations for schools in City Council District 4, and presents a prioritized list of projects. It also presents a map and matrix showing all the recommendations made for each school. Recommended improvements aim to address identified safety or access issues for students walking and biking to school. **Ideas presented in this document are planning-level concepts: many projects will require further feasibility study and engineering evaluation before they can be implemented. In some locations, alternate approaches to address the issue may prove more feasible or more cost effective. Specific infrastructure treatments are defined and explained in the Austin SRTS Engineering Toolkit (Appendix A).**

SCHOOL AUDITS

School audits in District 4 took place the weeks of March 25 and April 1, 2019. Audit teams were led by a team of transportation planners and designers, as well as City of Austin staff from the Departments of Public Works and Transportation, and school representatives. School representatives typically included the principal or a designee and 1-2 parent representatives.

Most audits took place in the early morning, with a brief introductory meeting followed by an observation of school arrival. After the school bell rang, the team reconvened to

DRAFT

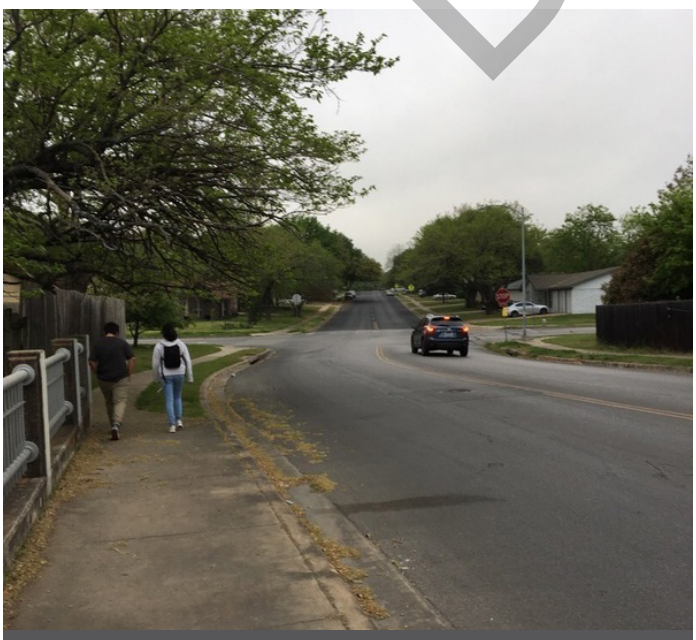

Walk Audit at Wooldridge Elementary School

Walk Audit at McBee Elementary School

debrief and discuss next steps. Following the summary meeting, the consultants and City staff completed the assessment of walking and biking infrastructure around the school, focusing on a half-mile radius for pedestrian facility recommendations and up to a two-mile radius for bicycle facilities. The recommendations were reviewed by City staff for consistency with other planning efforts prior to prioritization.

PUBLIC ENGAGEMENT

In addition to participating in the school audits, members of the public were invited to provide input via an online map and at "pop-up" meetings at community events. Flyers explaining the project and promoting these opportunities were developed in English and Spanish, distributed to school contacts, and published on the City's website and social media channels.

ONLINE INTERACTIVE MAP

The project team used an online interactive map to gather input from the community on the barriers to walking and biking to school. English and Spanish language versions of the online map went live in February 2019. Users could access the maps via links on the City's Safe Routes to School website. Using lines and points, wikimap users were asked to identify barriers, routes their family currently bikes or walks, and difficult routes for biking and walking.

Summary of Responses

Before adding their comments to the map, users were asked to complete a short survey to help understand their background, walking and bicycling habits, and place of residence. The following is a summary of demographic characteristics from respondents from District 4, as well as a map that shows the concentrations of comments made on the map.

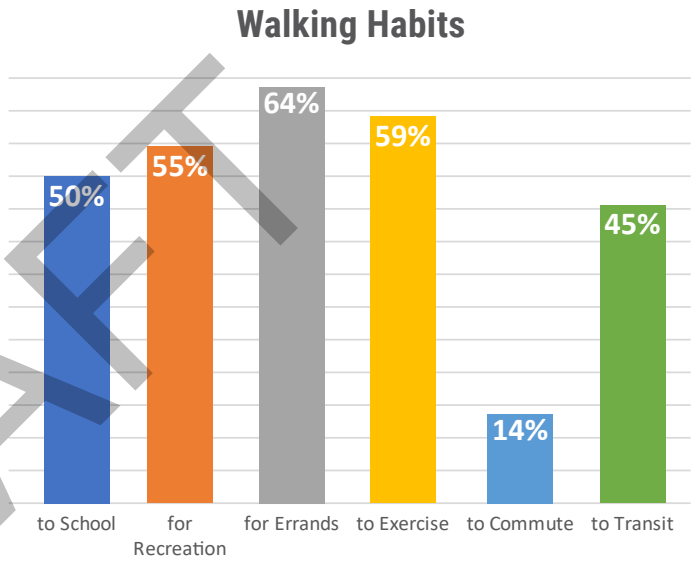

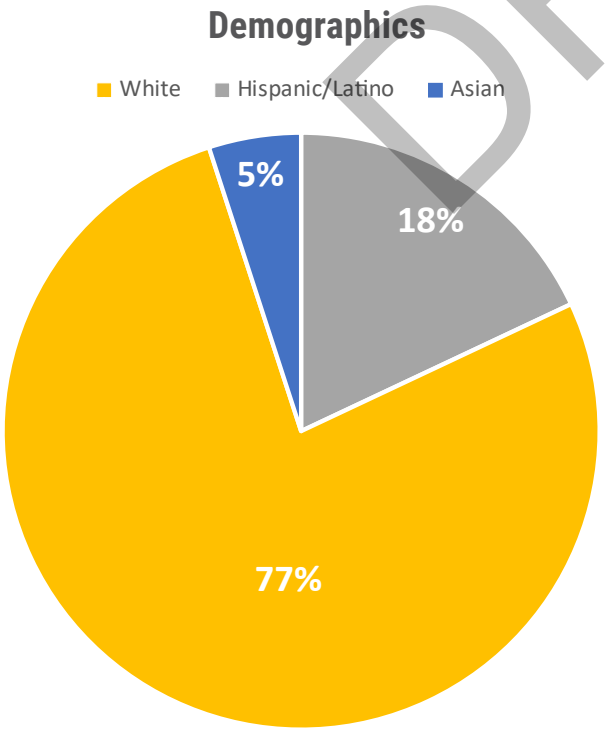

Demographics of Online Map Respondents, District 4

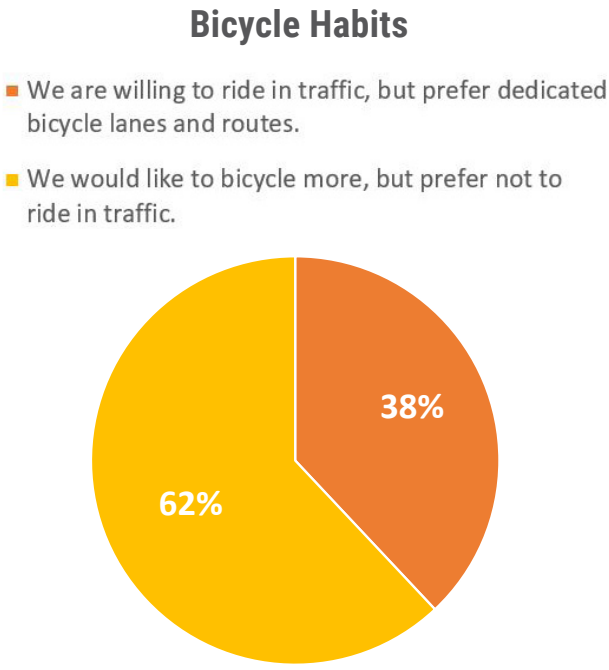

Survey Responses from Online Map Respondents, District 4

DRAFT

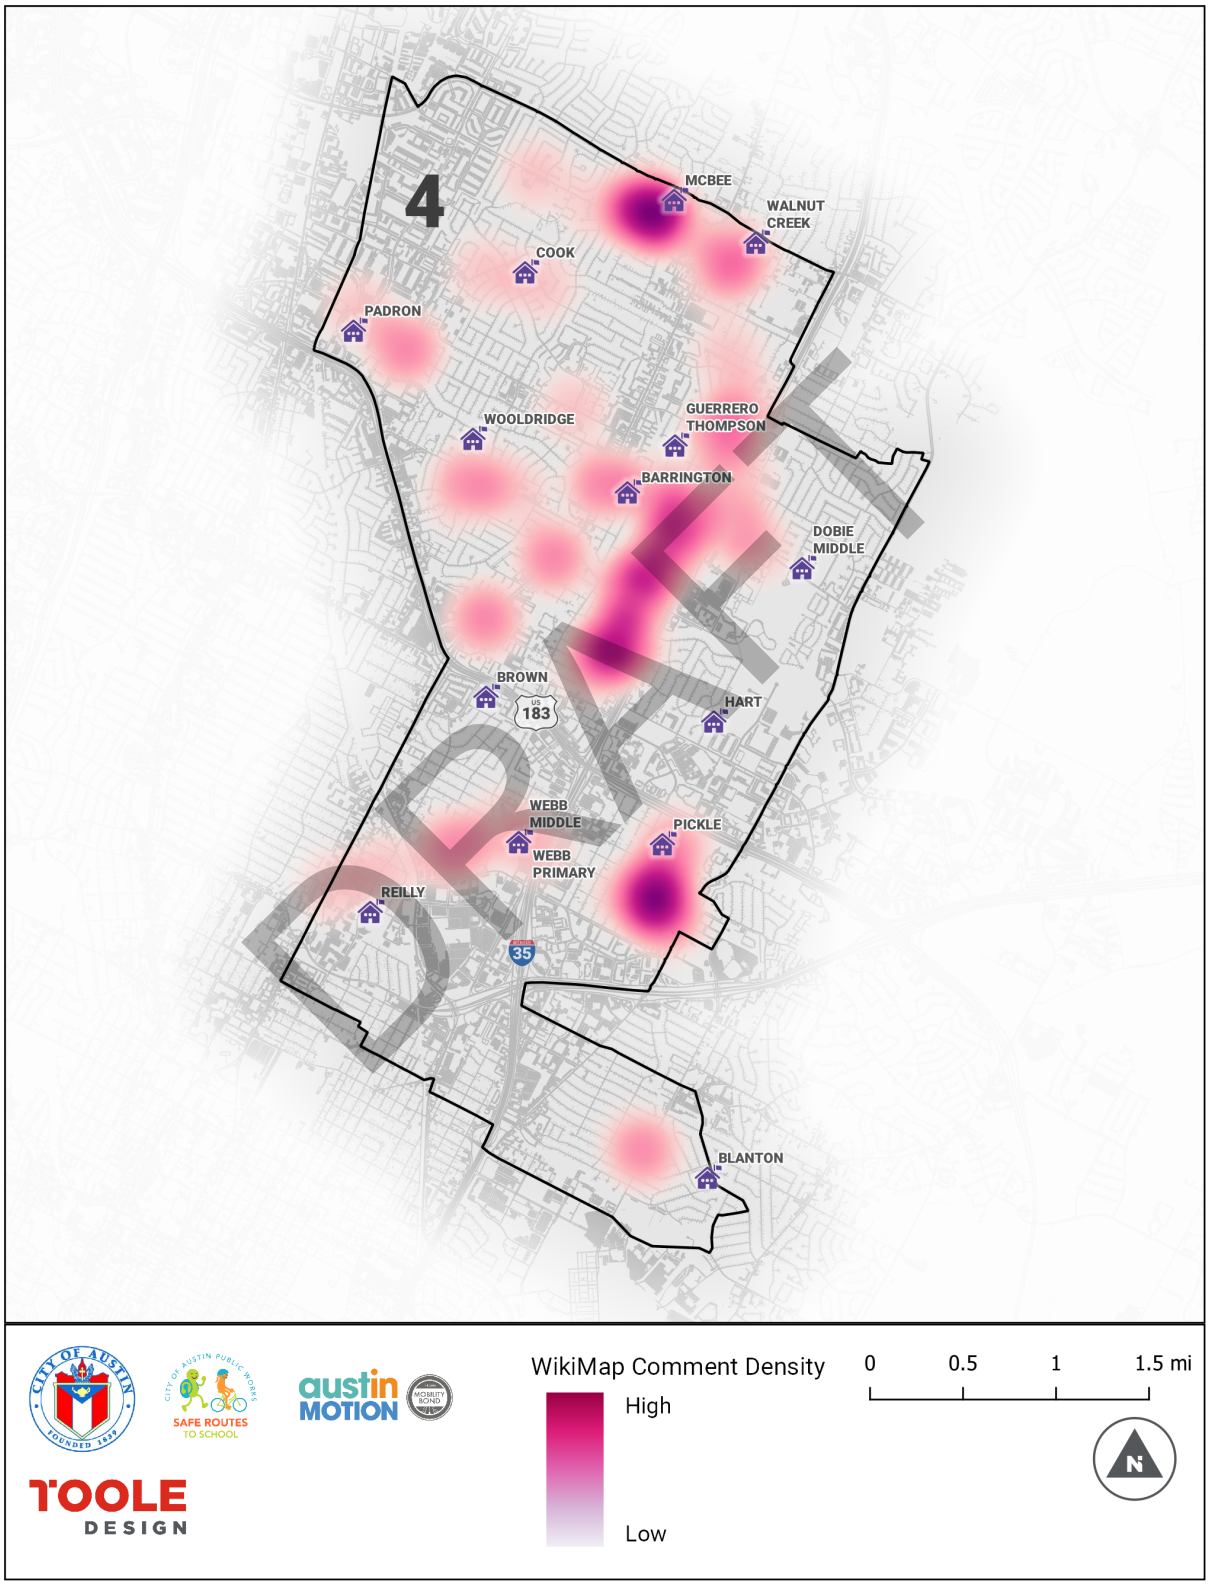

Heatmap of Online Map Comments, District 4

"POP UP" MEETINGS

In fall 2018, the project team switched the approach to public outreach from project-specific Open Houses to "pop-up" meetings. For each "pop-up" meeting, members of the project team set up tables at school festivals, public libraries, and recreation centers with both electronic and paper maps for participants to provide their feedback. Comments received on the paper maps were added to the wikimap and incorporated into the infrastructure recommendations. Between March 5, 2019 and April 13, 2019, a total of 23 "pop-up" meetings were held with a total of 162 wikimap comments received.

PRIORITIZATION

Information from the school audits, online map and open houses was combined to create a list of recommended projects around each school. Then, the projects were scored using a three-step process to create a prioritized list for each council district.

Step 1: Prioritize recommendations based on potential benefit.

To calculate the potential benefit, each project was evaluated on four factors: Stakeholder Input, Safety, Demand and Equity. Using available data, the following scoring system was used to calculate a Benefit Score for each proposed project.

35%: Demand
(Schools within ¼ mile, Potential students served)
+
30%: Safety
(Crash data, Street type, Engineering judgment)
+
20%: Equity
(Free & reduced lunch rate, Poverty rate)
+
15%: Stakeholder Input
(Public comments from Open Houses and WikiMap)
=
100%: Final Benefit Score

Step 2: Adjust for existing conditions.

To further prioritize projects that would create new facilities and close gaps in the existing bicycle and pedestrian networks, the Benefit Score was divided in half for recommendations that improve existing facilities (as opposed to creating new connections/facilities).

Step 3: Calculate cost benefit score.

Planning-level cost estimates for each project were developed based on bid tabulations maintained by the City of Austin. The benefit score was divided by the estimated project cost, and results were sorted into five categories to represent Cost:Benefit - very high, high, med, low, very low.

Costs opinions are order-of-magnitude, planning-level estimates based on local bid tabulations for similar project

DRAFT

Gus Garcia Easter Egg Hunt

Little Walnut Creek Library

types. Planning-level cost estimates do not take into consideration localized specifics of each project such as right-of-way acquisition, significant utility relocation, etc. They are useful for aggregate-level budget planning, but individual project cost estimates will change as projects advance through further study and design.

After further feasibility study and engineering evaluation, final project cost estimates will change before they can be implemented. In some locations, alternate approaches to address the issue may prove more feasible or more cost effective.

PRIORITIZATION SUMMARY

There are a total of 448 recommended projects in City Council District 4 with a total estimated cost of $64.3 million. The combined costs for all projects in each Overall Benefit category are shown in the table below.

Costs are planning-level estimates that will be refined as projects advance through further study and design. They can be used to evaluate the order-of-magnitude of needs at an aggregate level.

Overall Benefit Category	Combined Project Costs
1 - Very High	$40,300,000
2 - High	$10,600,000
3 - Medium	$9,800,000
4 - Low	$3,100,000
5 - Very Low	$500,000
District 4 Total	**$64,300,000**

NEXT STEPS

Both Overall and Estimated Cost:Benefits will be used to prioritize improvements. However, to use the Safe Routes to School's limited resources most effectively, the program is also considering other factors to determine which projects will move forward as well as project implementation order. These factors include final cost estimates, feasibility, leveraging / cost-sharing opportunities, and more.

Generally, projects will be selected for implementation using the following guiding principles:

1) Implement Projects that have a High/Very High Overall Benefit or a High/Very High Estimated Cost:Benefit,
2) Make meaningful improvements for walking and bicycling near as many schools as possible,
3) For 2016 bond funding, per council direction, balance funding equally per council district,
4) Other available sources of funding will be leveraged to implement additional projects.

The City of Austin has already started examining the feasibility of recommendations and, in some cases, has initiated design/construction for certain projects. Go to AustinTexas.gov/SafeRoutes to learn more and get updates about upcoming Safe Routes to School projects in each City Council District.

DRAFT

CITY COUNCIL DISTRICT 4

RECOMMENDED SAFE ROUTES TO SCHOOL PROJECTS

DRAFT

The following pages present maps of all recommendations, followed by detailed tables that include the Benefit and Cost:Benefit category for each project. Each recommendation has a unique identification number, which can be cross-referenced between the maps and the tables. The unique project ID is a combination of the school group code (e.g., 1C) and the project number shown on the map (e.g., 001).

Ideas presented in this document are planning-level concepts: many projects will require further feasibility study and engineering evaluation before they can be implemented. In some locations, alternate approaches to address the issue may prove more feasible or more cost effective.

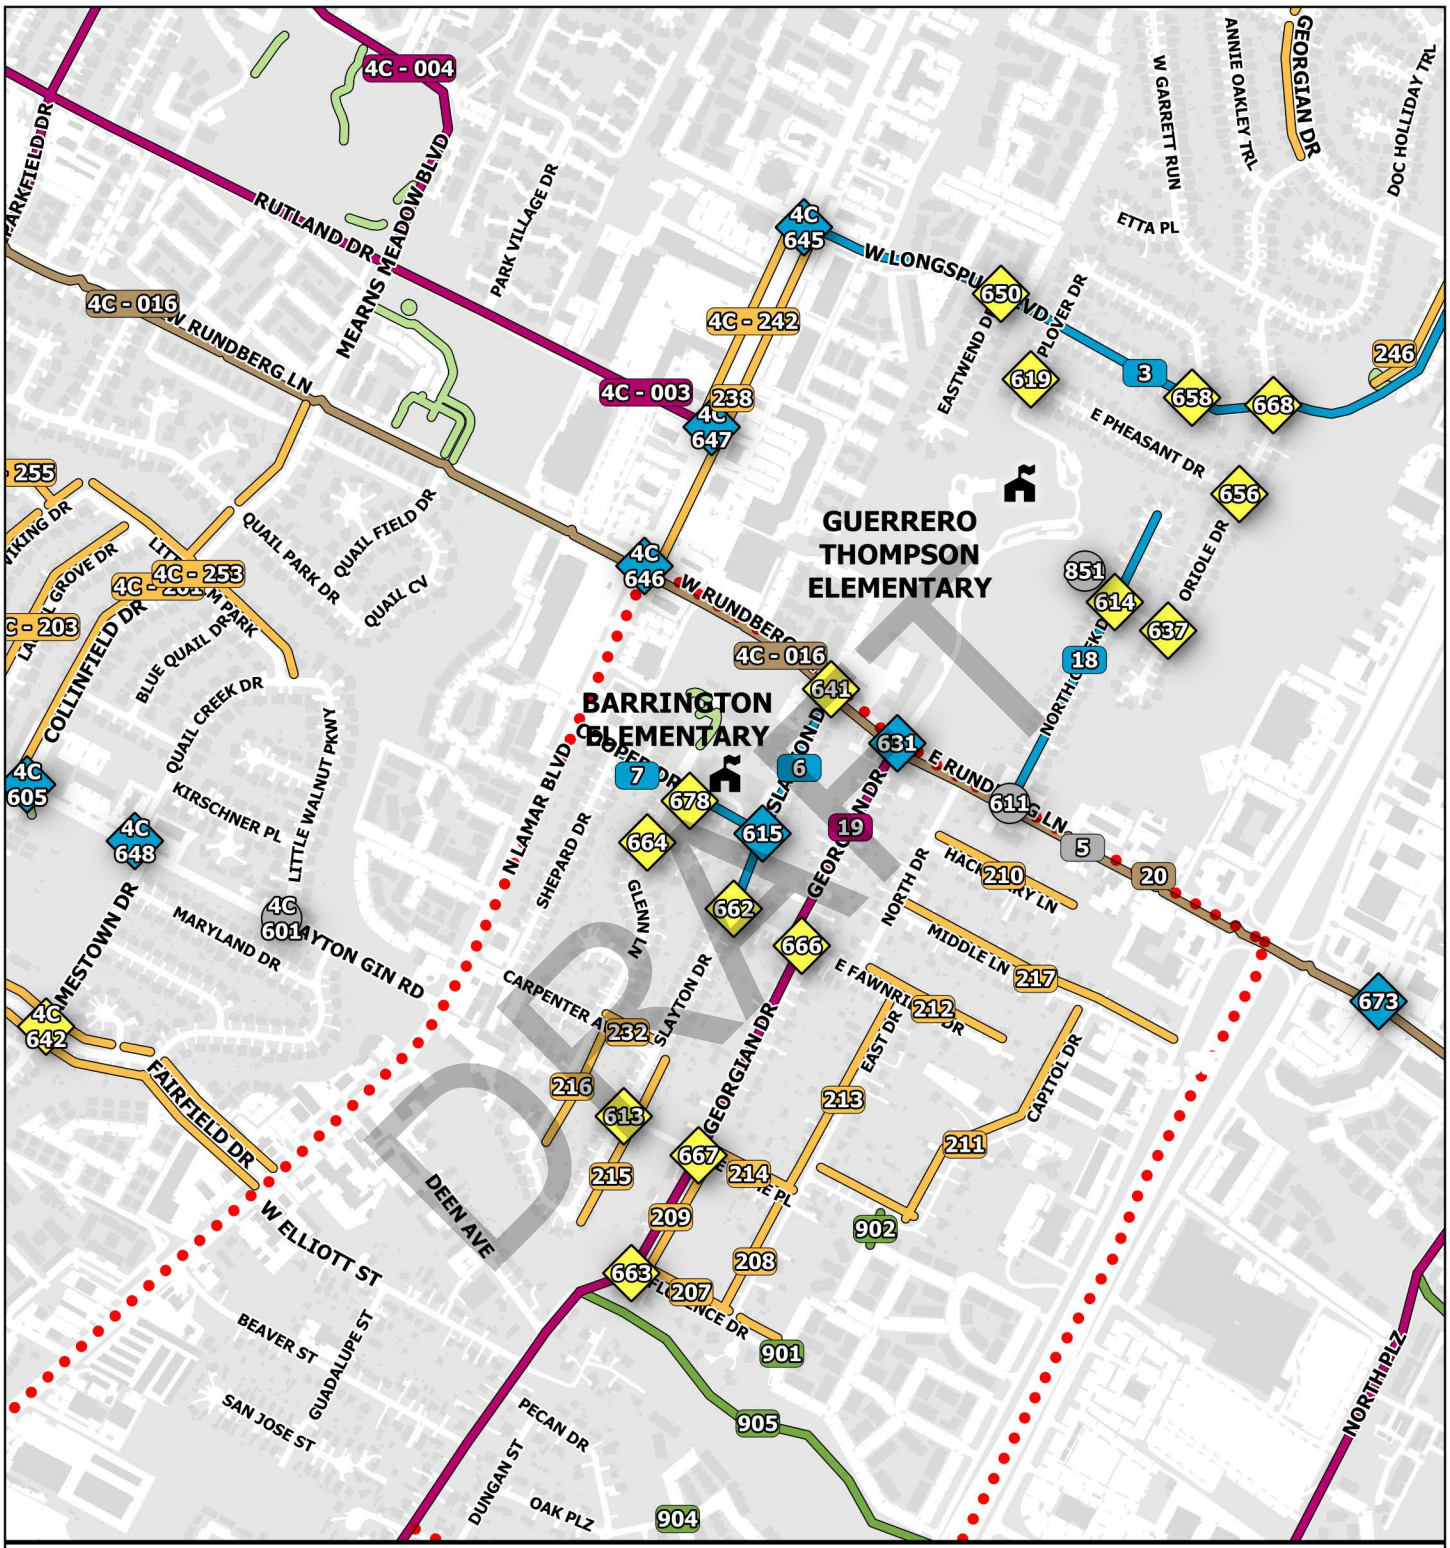

Off-Street Trail
Bike Lane / Buffered Bike Lane / Protected Bike Lane
Sidepath
Neighborhood Bikeway / Traffic Calming
New / Improved Sidewalk
Other linear recommendation

Traffic Control / Intersection Reconfiguration
Ramp / Curb Extension / Crosswalk
Over / Underpass
Other Spot Recommendation

Existing Trail
School Boundary

0 800 1600 2400 ft

SCHOOL GROUP 4A

DOBIE MIDDLE

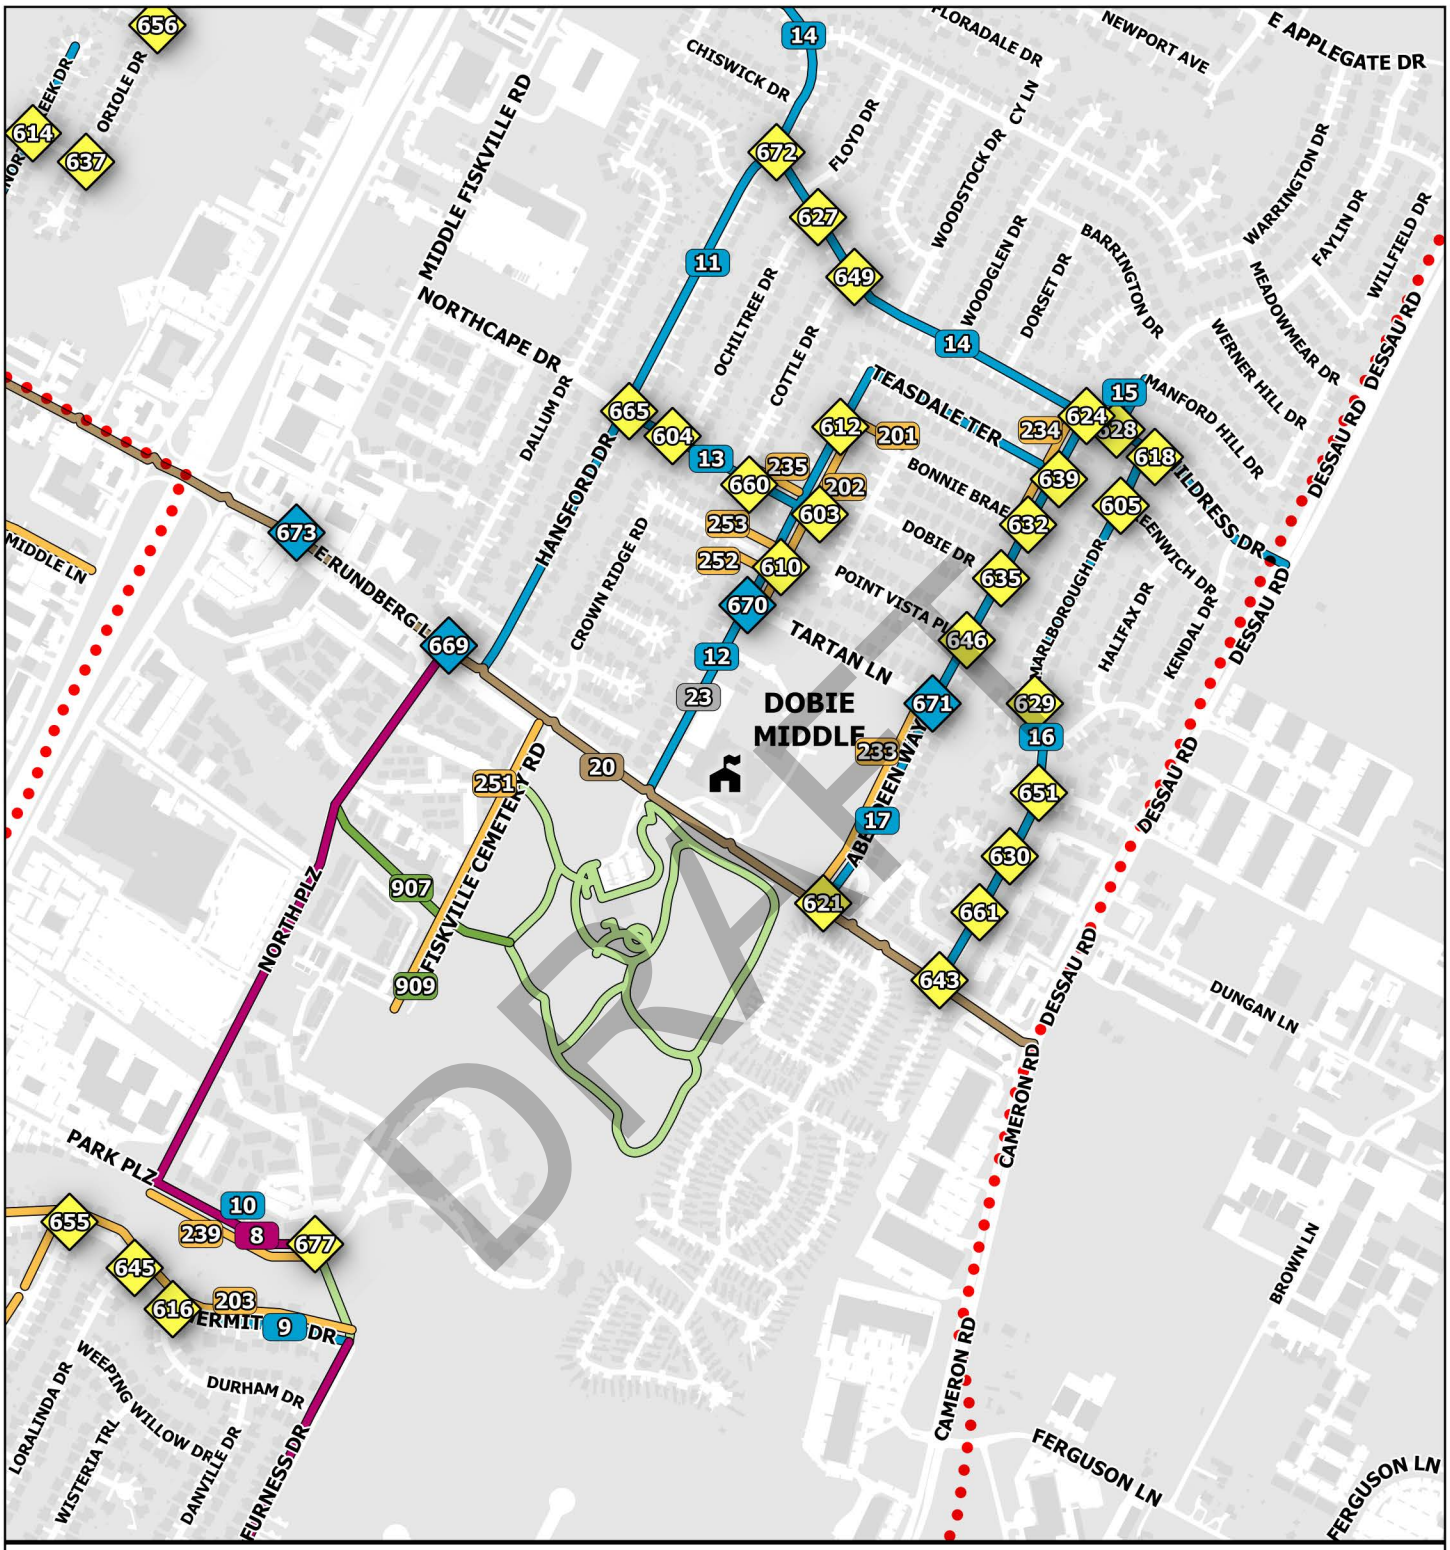

Off-Street Trail

Bike Lane / Buffered Bike Lane / Protected Bike Lane

Sidepath

Neighborhood Bikeway / Traffic Calming

New / Improved Sidewalk

Other linear recommendation

Traffic Control / Intersection Reconfiguration

Ramp / Curb Extension / Crosswalk

Over / Underpass

Other Spot Recommendation

Existing Trail

School Boundary

0 800 1600 2400 ft

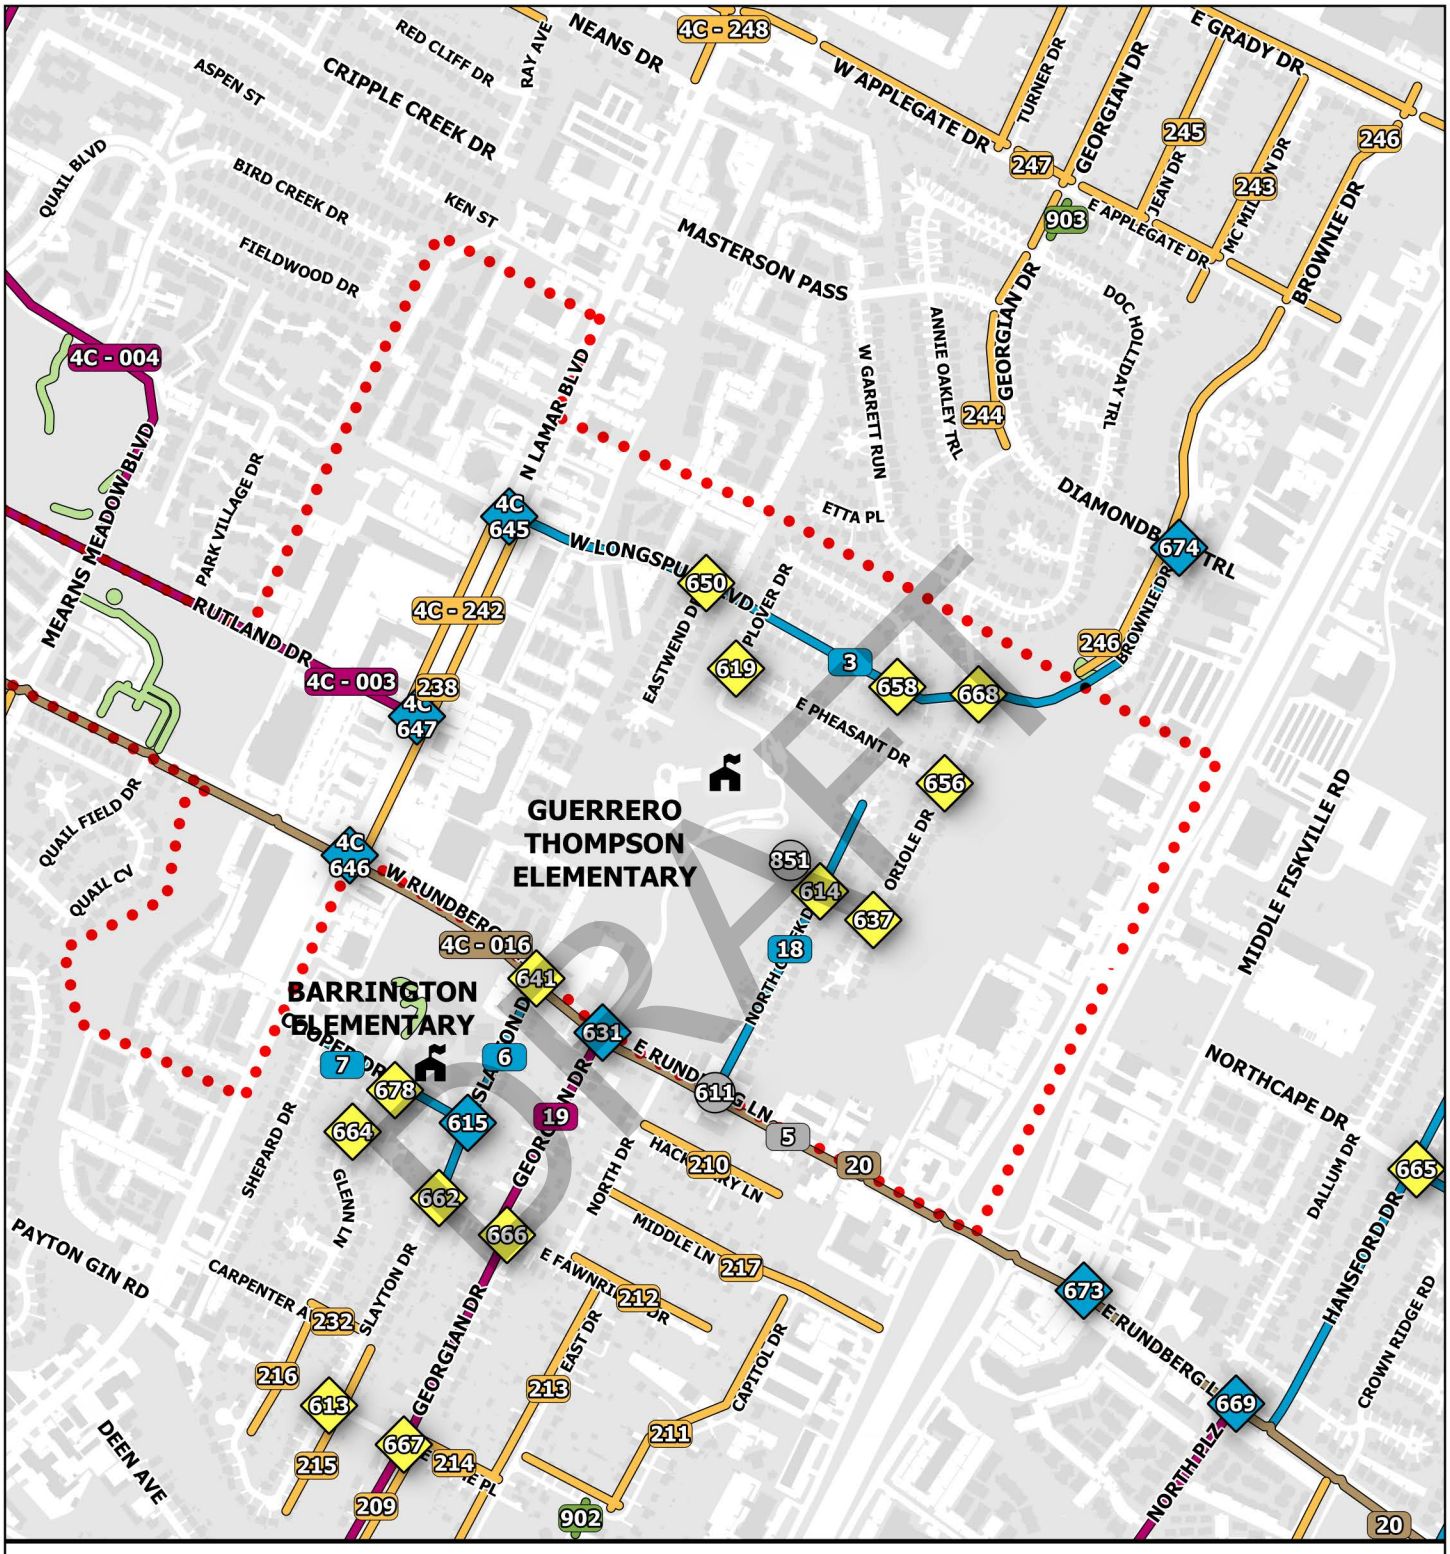
GUERRERO THOMPSON ELEMENTARY
BARRINGTON ELEMENTARY
DRAFT
4C - 248
W APPLEGATE DR
E GRADY DR
NEANS DR
RED CLIFF DR
RAY AVE
ASPEN ST
CRIPPLE CREEK DR
QUAIL BLVD
BIRD CREEK DR
KEN ST
FIELDWOOD DR
MASTERSON PASS
TURNER DR
GEORGIAN DR
JEAN DR
MC MILLAN DR
BROWNIE DR
E APPLEGATE DR
247
903
245
243
246
244
ANNIE OAKLEY TRL
DOC HOLLIDAY TRL
W GARRETT RUN
4C - 004
MEARNS MEADOW BLVD
PARK VILLAGE DR
RUTLAND DR
N LAMAR BLVD
4C - 003
4C - 242
4C 645
W LONGSPUR BLVD
ETTA PL
DIAMONDBACK TRL
674
650
EASTWEND DR
PLOVER DR
619
3
658
668
246
238
4C 647
E PHEASANT DR
656
QUAIL FIELD DR
QUAIL CV
4C 646
W RUNDBERG LN
851
614
ORIOLE DR
637
18
4C - 016
641
631
E RUNDBERG LN
611
5
20
MIDDLE FISKVILLE RD
NORTHCAPE DR
DALLUM DR
665
7
678
615
6
19
664
662
666
SHEPARD DR
GLENN LN
SLAYTON DR
GEORGIAN DR
NORTH DR
HACKBERRY LN
210
MIDDLE LN
217
E FAWNRIDGE DR
212
673
E RUNDBERG LN
HANSFORD DR
669
CROWN RIDGE RD
PAYTON GIN RD
CARPENTER AVE
232
216
613
215
667
209
EAST DR
213
214
E PL
902
CAPITOL DR
211
DEEN AVE
NORTH PLZ
20
0
800
1600
2400 ft
Off-Street Trail
Bike Lane / Buffered Bike Lane / Protected Bike Lane
Sidepath
Neighborhood Bikeway / Traffic Calming
New / Improved Sidewalk
Other linear recommendation
Traffic Control / Intersection Reconfiguration
Ramp / Curb Extension / Crosswalk
Over / Underpass
Other Spot Recommendation
Existing Trail
School Boundary

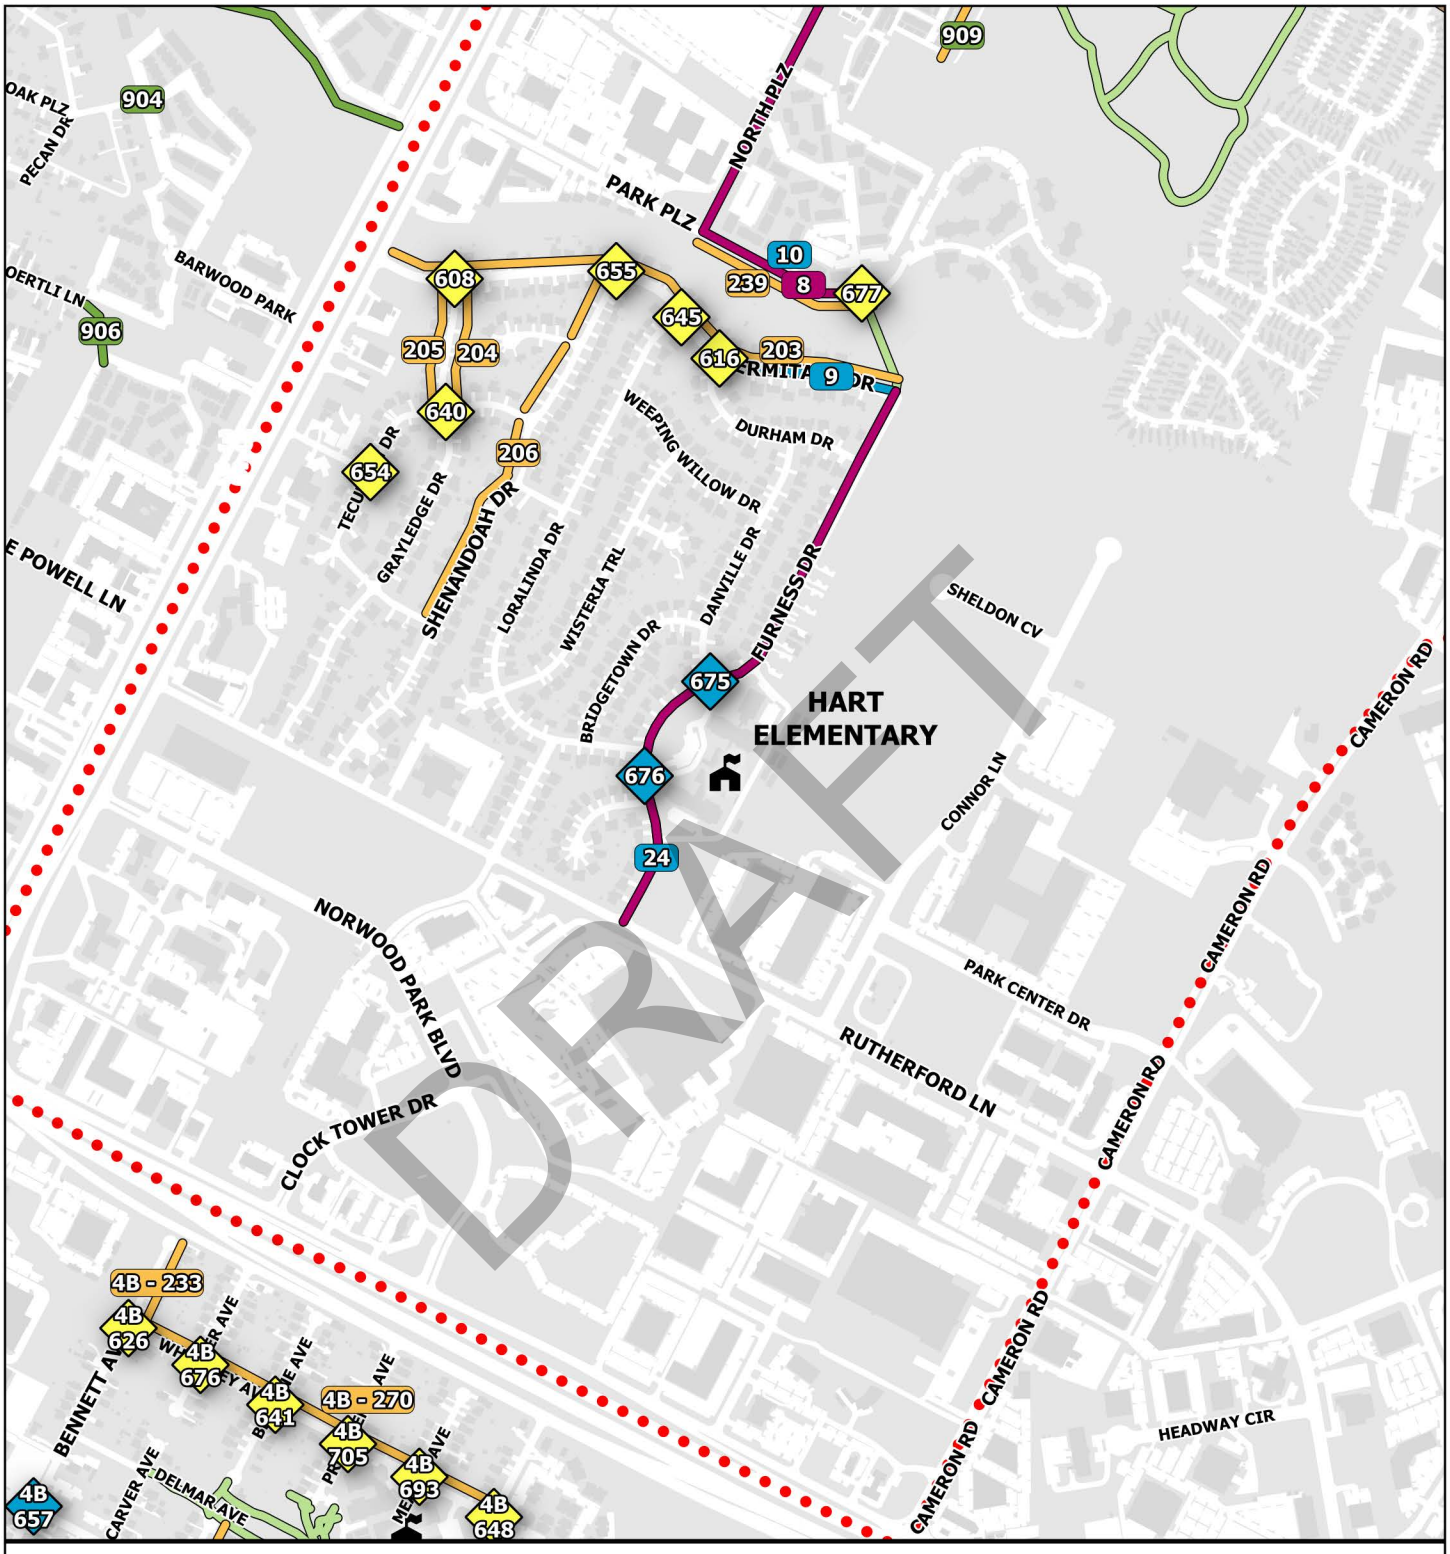

SAFE ROUTES TO SCHOOL

TOOLE DESIGN

0 800 1600 2400 ft

- Off-Street Trail
- Bike Lane / Buffered Bike Lane / Protected Bike Lane
- Sidepath
- Neighborhood Bikeway / Traffic Calming
- New / Improved Sidewalk
- Other linear recommendation
- Traffic Control / Intersection Reconfiguration
- Ramp / Curb Extension / Crosswalk
- Over / Underpass
- Other Spot Recommendation
- Existing Trail
- School Boundary

SCHOOL GROUP 4A

WALNUT CREEK ELEMENTARY

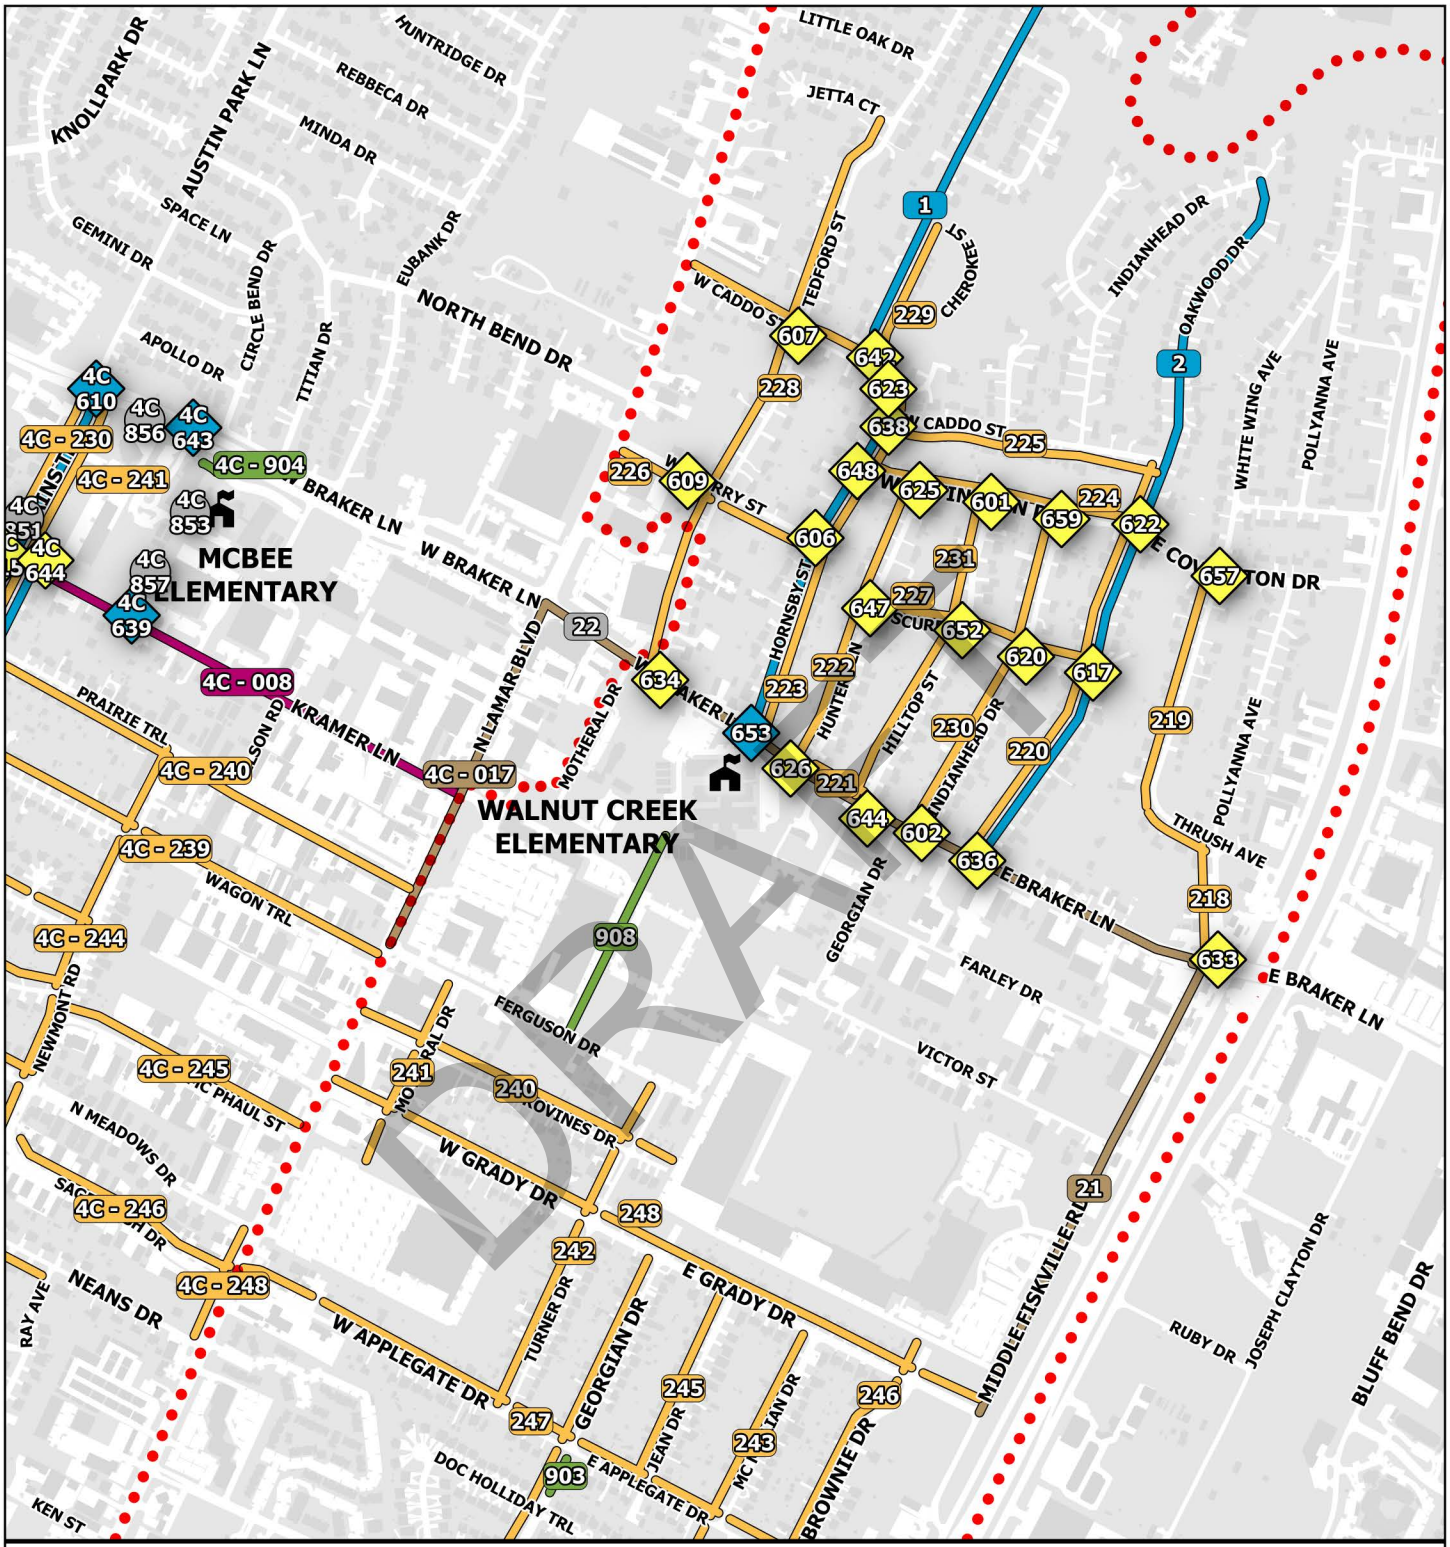

Project ID	Nearby School(s)	Location	Issue	Recommendation + = parking removal required * = curb changes required ~ = private property acquisition required	Benefit Category	Cost:Benefit Category
4A - 003	BARRINGTON, GUERRERO THOMPSON	W LONGSPUR BLVD	Excessive vehicle speeds, No bike facility	Add speed cushions - W LONGSPUR BLVD from E LONGSPUR BLVD to N LAMAR BLVD , Add neighborhood bikeway - W LONGSPUR BLVD from E LONGSPUR BLVD to N LAMAR BLVD , Add speed cushions - E LONGSPUR BLVD from W LONGSPUR BLVD to ORIOLE DR , Add neighborhood bikeway - E LONGSPUR BLVD from W LONGSPUR BLVD to BROWNIE DR , Add neighborhood bikeway - BROWNIE DR from DIAMONDBACK TRL to E LONGSPUR BLVD	1 - Very High	1 - Very High
4A - 005	GUERRERO THOMPSON, BARRINGTON	E RUNDBERG LN	Excessive vehicle speeds	Study extending existing school zone along Rundberg to east of Georgian as requested by Guerrero-Thompson Elementary - E RUNDBERG LN from NORTH CREEK DR to Near 404 RUNDBERG LN	4 - Low	2 - High
4A - 006	GUERRERO THOMPSON, BARRINGTON	SLAYTON DR	Excessive vehicle speeds	Add speed cushions - SLAYTON DR from W RUNDBERG LN to W FAWNRIDGE DR	1 - Very High	1 - Very High
4A - 007	BARRINGTON, GUERRERO THOMPSON	COOPER DR	Excessive vehicle speeds	Add speed cushions - COOPER DR from SLAYTON DR to SHEPARD DR	1 - Very High	1 - Very High

DRAFT

Estimated Cost: Benefit rankings are preliminary, planning level-estimates to identify cost-effective options for addressing safety concerns. Estimated Cost: Benefit rankings are developed using planning level costs for projects of this nature. Individual project cost estimates will change as projects advance. See pages 4-5 of this report for more information about how the Safe Routes Program determines project prioritization and implementation.

Project ID	Nearby School(s)	Location	Issue	Recommendation + = parking removal required * = curb changes required ~ = private property acquisition required	Benefit Category	Cost:Benefit Category
4A - 008	DOBIE, HART	FURNESS DR	Poor lighting	Add vertical element to existing buffer - FURNESS DR from HERMITAGE DR to RUTHERFORD LN , Add lighting - FURNESS DR from HERMITAGE DR to RUTHERFORD LN , Add lighting - PARK PLZ from NORTH PLZ to Near 1059 PARK PLZ , Add vertical element to existing buffer - PARK PLZ from NORTH PLZ to Near 1059 PARK PLZ , Add lighting - NORTH PLZ from PARK PLZ to E RUNDBERG LN , Add vertical element to existing buffer - NORTH PLZ from PARK PLZ to E RUNDBERG LN	1 - Very High	1 - Very High
4A - 009	HART	FURNESS DR	Excessive vehicle speeds	Add speed cushions - HERMITAGE DR from FURNESS DR to DURHAM DR , Add speed cushions - FURNESS DR from DURHAM DR to HERMITAGE DR	1 - Very High	1 - Very High
4A - 010	HART	PARK PLZ	Excessive vehicle speeds	Add speed cushions - PARK PLZ from NORTH PLZ to Near 1059 PARK PLZ	1 - Very High	1 - Very High
4A - 011	DOBIE	HANSFORD DR	No bike facility	Add neighborhood bikeway - HANSFORD DR from E RUNDBERG LN to CHILDRESS DR	1 - Very High	1 - Very High
4A - 012	DOBIE	TEASDALE TER	Excessive vehicle speeds, No bike facility	Add speed cushions - TEASDALE TER from E RUNDBERG LN to TARTAN LN , Add neighborhood bikeway - TEASDALE TER from E RUNDBERG LN to ABERDEEN WAY , Add speed cushions - TEASDALE TER from ABERDEEN WAY to CROWN RIDGE PATH	1 - Very High	1 - Very High
4A - 013	DOBIE	NORTHCAPE DR	No bike facility	Add neighborhood bikeway - NORTHCAPE DR from TEASDALE TER to HANSFORD DR	1 - Very High	1 - Very High

DRAFT

Estimated Cost: Benefit rankings are preliminary, planning level-estimates to identify cost-effective options for addressing safety concerns. Estimated Cost: Benefit rankings are developed using planning level costs for projects of this nature. Individual project cost estimates will change as projects advance. See pages 4-5 of this report for more information about how the Safe Routes Program determines project prioritization and implementation.

Project ID	Nearby School(s)	Location	Issue	Recommendation + = parking removal required * = curb changes required ~ = private property acquisition required	Benefit Category	Cost:Benefit Category
4A - 014	DOBIE	CHILDRESS DR	No bike facility	Add neighborhood bikeway - CHILDRESS DR from DESSAU RD to the end of CHILDRESS DR	1 - Very High	1 - Very High
4A - 015	DOBIE	FAYLIN DR	No bike facility	Add neighborhood bikeway - FAYLIN DR from CHILDRESS DR to MANFORD HILL DR	2 - High	1 - Very High
4A - 016	DOBIE	MARLBOROUGH DR	No bike facility	Add neighborhood bikeway - MARLBOROUGH DR from CHILDRESS DR to E RUNDBERG LN	2 - High	2 - High
4A - 017	DOBIE	ABERDEEN WAY	Desired bike route, No bike facility	Add neighborhood bikeway - ABERDEEN WAY from CHILDRESS DR to E RUNDBERG LN	1 - Very High	1 - Very High
4A - 018	GUERRERO THOMPSON, BARRINGTON	NORTH CREEK DR	Excessive vehicle speeds	Add speed cushions - NORTH CREEK DR from E RUNDBERG LN to Near 9704 NORTH CREEK DR	1 - Very High	1 - Very High
4A - 019	GUERRERO THOMPSON, BARRINGTON, WEBB, WEBB, BROWN	GEORGIAN DR	No bike facility	Add protected bike lane - NORTHCREST BLVD from W ANDERSON LN SVRD WB to W ST JOHNS AVE , Add protected bike lane - GEORGIAN DR from W ANDERSON LN SVRD WB to W FAWNRIDGE DR , Add protected bike lane - W FAWNRIDGE DR from GEORGIAN DR to GEORGIAN DR , Add protected bike lane - GEORGIAN DR from W FAWNRIDGE DR to E RUNDBERG LN	1 - Very High	4 - Low
4A - 020	DOBIE, BARRINGTON, GUERRERO THOMPSON	E RUNDBERG LN	No bike facility	Add sidepath - E RUNDBERG LN from CAMERON RD to NORTH CREEK DR	1 - Very High	5 - Very Low
4A - 022	WALNUT CREEK, MCBEE	W BRAKER LN	No bike facility	Add sidepath - W BRAKER LN from N LAMAR BLVD to E BRAKER LN , Add sidepath - E BRAKER LN from W BRAKER LN to MIDDLE FISKVILLE RD	1 - Very High	5 - Very Low

DRAFT

Estimated Cost: Benefit rankings are preliminary, planning level-estimates to identify cost-effective options for addressing safety concerns. Estimated Cost: Benefit rankings are developed using planning level costs for projects of this nature. Individual project cost estimates will change as projects advance. See pages 4-5 of this report for more information about how the Safe Routes Program determines project prioritization and implementation.

Project ID	Nearby School(s)	Location	Issue	Recommendation + = parking removal required * = curb changes required ~ = private property acquisition required	Benefit Category	Cost:Benefit Category
4A - 023	DOBIE	TEASDALE TER	Excessive vehicle speeds	Study extending existing school zone along Teasdale Terrace south towards Rundberg as requested by school - TEASDALE TER from E RUNDBERG LN to TARTAN LN	3 - Medium	1 - Very High
4A - 024	HART	FURNESS DR	Excessive vehicle speeds	Add speed cushions - FURNESS DR from RUTHERFORD LN to Near 8404 FURNESS DR	1 - Very High	1 - Very High
4A - 201	DOBIE	BONNIE BRAE	Missing sidewalk	Construct new sidewalk - BONNIE BRAE from POINT VISTA PL to TEASDALE TER	2 - High	2 - High
4A - 202	DOBIE	TEASDALE TER	Missing sidewalk, Poor condition, Temporary obstruction (ex. vegetation)	Construct new sidewalk - TEASDALE TER from TARTAN LN to NORTHCAPE DR , Trim vegetation - TEASDALE TER from BONNIE BRAE to NORTHCAPE DR , Repair existing sidewalk - TEASDALE TER from BONNIE BRAE to NORTHCAPE DR	1 - Very High	1 - Very High
4A - 203	HART	HERMITAGE DR	Missing sidewalk	Construct new sidewalk - HERMITAGE DR from SHENANDOAH DR to N IH 35 SVRD NB , Construct new sidewalk - HERMITAGE DR from FURNESS DR to SHENANDOAH DR	1 - Very High	3 - Medium
4A - 204	HART	GRAYLEDGE DR	Missing sidewalk	Construct new sidewalk - GRAYLEDGE DR from HERMITAGE DR to POTOMAC PATH	2 - High	2 - High
4A - 205	HART	GRAYLEDGE DR	Missing sidewalk	Construct new sidewalk - GRAYLEDGE DR from HERMITAGE DR to POTOMAC PATH	2 - High	2 - High
4A - 206	HART	SHENANDOAH DR	Missing sidewalk	Construct new sidewalk - SHENANDOAH DR from HERMITAGE DR to VALLEY FORGE DR	1 - Very High	3 - Medium
4A - 207	BARRINGTON	FLORENCE DR	Missing sidewalk	Construct new sidewalk - FLORENCE DR from GEORGIAN DR to Near 404 FLORENCE DR	3 - Medium	3 - Medium
4A - 208	BARRINGTON	EAST DR	Missing sidewalk	Construct new sidewalk - EAST DR from FLORENCE DR to E HOME PL	3 - Medium	3 - Medium

DRAFT

Estimated Cost: Benefit rankings are preliminary, planning level-estimates to identify cost-effective options for addressing safety concerns. Estimated Cost: Benefit rankings are developed using planning level costs for projects of this nature. Individual project cost estimates will change as projects advance. See pages 4-5 of this report for more information about how the Safe Routes Program determines project prioritization and implementation.

Project ID	Nearby School(s)	Location	Issue	Recommendation + = parking removal required * = curb changes required ~ = private property acquisition required	Benefit Category	Cost:Benefit Category
4A - 209	BARRINGTON	GEORGIAN DR	Narrow sidewalk, Poor condition	Widen existing sidewalk - GEORGIAN DR from W HOME PL to FLORENCE DR , Repair existing sidewalk - GEORGIAN DR from W HOME PL to FLORENCE DR	5 - Very Low	4 - Low
4A - 210	BARRINGTON, GUERRERO THOMPSON	HACKBERRY LN	Missing sidewalk	Construct new sidewalk - HACKBERRY LN from NORTH DR to Near 412 HACKBERRY LN	3 - Medium	3 - Medium
4A - 211	BARRINGTON, GUERRERO THOMPSON	CAPITOL DR	Missing sidewalk	Construct new sidewalk - CAPITOL DR from MIDDLE LN to EAST DR	3 - Medium	4 - Low
4A - 212	GUERRERO THOMPSON, BARRINGTON	E FAWNRIDGE DR	Missing sidewalk	Construct new sidewalk - E FAWNRIDGE DR from Near 510 FAWNRIDGE DR to NORTH DR	3 - Medium	3 - Medium
4A - 213	BARRINGTON, GUERRERO THOMPSON	EAST DR	Missing sidewalk	Construct new sidewalk - EAST DR from E FAWNRIDGE DR to E HOME PL	3 - Medium	4 - Low
4A - 214	BARRINGTON	E HOME PL	Missing sidewalk	Construct new sidewalk - E HOME PL from EAST DR to W HOME PL	3 - Medium	2 - High
4A - 215	BARRINGTON	SLAYTON DR	Missing sidewalk, Poor condition	Construct new sidewalk - SLAYTON DR from SCHIRRA PL to W HOME PL , Repair existing sidewalk - SLAYTON DR from W HOME PL to CARPENTER AVE	2 - High	2 - High
4A - 216	BARRINGTON	GLENN LN	Missing sidewalk	Construct new sidewalk - GLENN LN from CARPENTER AVE to OAKLEY CT	3 - Medium	3 - Medium
4A - 217	BARRINGTON, GUERRERO THOMPSON	MIDDLE LN	Missing sidewalk	Construct new sidewalk - MIDDLE LN from N IH 35 SVRD SB to NORTH DR	3 - Medium	4 - Low
4A - 232	BARRINGTON	CARPENTER AVE	Missing sidewalk	Construct new sidewalk - CARPENTER AVE from GLENN LN to SLAYTON DR	3 - Medium	2 - High
4A - 233	DOBIE	ABERDEEN WAY	Missing sidewalk	Construct new sidewalk - ABERDEEN WAY from TARTAN LN to E RUNDBERG LN	1 - Very High	1 - Very High

DRAFT

Estimated Cost: Benefit rankings are preliminary, planning level-estimates to identify cost-effective options for addressing safety concerns. Estimated Cost: Benefit rankings are developed using planning level costs for projects of this nature. Individual project cost estimates will change as projects advance. See pages 4-5 of this report for more information about how the Safe Routes Program determines project prioritization and implementation.

Project ID	Nearby School(s)	Location	Issue	Recommendation + = parking removal required * = curb changes required ~ = private property acquisition required	Benefit Category	Cost:Benefit Category
4A - 234	DOBIE	ABERDEEN WAY	Missing sidewalk	Construct new sidewalk - ABERDEEN WAY from CHILDRESS DR to BONNIE BRAE	1 - Very High	1 - Very High
4A - 235	DOBIE	NORTHCAPE DR	Missing sidewalk	Construct new sidewalk - NORTHCAPE DR from COTTLE DR to TEASDALE TER	1 - Very High	1 - Very High
4A - 238	GUERRERO THOMPSON, BARRINGTON	N LAMAR BLVD	Missing sidewalk	Construct new sidewalk - N LAMAR BLVD from W RUNDBERG LN to W LONGSPUR BLVD	1 - Very High	2 - High
4A - 239	HART	PARK PLZ	Missing sidewalk	Construct new sidewalk - PARK PLZ from NORTH PLZ to Near 1059 PARK PLZ	1 - Very High	2 - High
4A - 240	WALNUT CREEK, MCBEE	PROVINES DR	Missing sidewalk	Construct new sidewalk - PROVINES DR from N LAMAR BLVD to Near 100 PROVINES DR	2 - High	3 - Medium
4A - 241	WALNUT CREEK, MCBEE	MOTHERAL DR	Missing sidewalk	Construct new sidewalk - MOTHERAL DR from FERGUSON DR to parking lot south of Grady	2 - High	2 - High
4A - 242	WALNUT CREEK	TURNER DR	Missing sidewalk	Construct new sidewalk - TURNER DR from W APPLEGATE DR to FERGUSON DR	1 - Very High	3 - Medium
4A - 243	WALNUT CREEK	MC MILLIAN DR	Missing sidewalk	Construct new sidewalk - MC MILLIAN DR from E GRADY DR to creek just south of Applegate	2 - High	3 - Medium
4A - 244	WALNUT CREEK, GUERRERO THOMPSON	GEORGIAN DR	Missing sidewalk	Construct new sidewalk - GEORGIAN DR from E GRADY DR to DERRINGER TRL	1 - Very High	3 - Medium
4A - 245	WALNUT CREEK	JEAN DR	Missing sidewalk	Construct new sidewalk - JEAN DR from E APPLEGATE DR to E GRADY DR	2 - High	3 - Medium
4A - 246	GUERRERO THOMPSON	BROWNIE DR	Missing sidewalk	Construct new sidewalk - BROWNIE DR from HARDIN CT to Near 10000 BROWNIE DR , Construct new sidewalk - BROWNIE DR from Near 506 GRADY DR to HARDIN CT	1 - Very High	4 - Low

DRAFT

Estimated Cost: Benefit rankings are preliminary, planning level-estimates to identify cost-effective options for addressing safety concerns. Estimated Cost: Benefit rankings are developed using planning level costs for projects of this nature. Individual project cost estimates will change as projects advance. See pages 4-5 of this report for more information about how the Safe Routes Program determines project prioritization and implementation.

Project ID	Nearby School(s)	Location	Issue	Recommendation + = parking removal required * = curb changes required ~ = private property acquisition required	Benefit Category	Cost:Benefit Category
4A - 247	DOBIE, WALNUT CREEK	E APPLEGATE DR	Missing sidewalk	Construct new sidewalk - W APPLEGATE DR from GEORGIAN DR to N LAMAR BLVD , Construct new sidewalk - E APPLEGATE DR from end of E APPLEGATE DR to GEORGIAN DR	1 - Very High	4 - Low
4A - 248	WALNUT CREEK	E GRADY DR	Missing sidewalk	Construct new sidewalk - W GRADY DR from GEORGIAN DR to N LAMAR BLVD , Construct new sidewalk - E GRADY DR from GEORGIAN DR to MIDDLE FISKVILLE RD	1 - Very High	4 - Low
4A - 251	DOBIE	FISKVILLE CEMETERY RD	Missing sidewalk	Construct new sidewalk - FISKVILLE CEMETERY RD from Near 8942 NORTH PLZ to E RUNDBERG LN	1 - Very High	3 - Medium
4A - 252	DOBIE	CROWN RIDGE PATH	Missing sidewalk	Construct new sidewalk - CROWN RIDGE PATH from TEASDALE TER to Near 1113 CROWN RIDGE PATH	2 - High	1 - Very High
4A - 253	DOBIE	CROWN RIDGE PATH	Missing sidewalk	Construct new sidewalk - CROWN RIDGE PATH from Near 1116 CROWN RIDGE PATH to TEASDALE TER	2 - High	1 - Very High
4A - 602	WALNUT CREEK	E BRAKER LN / INDIANHEAD DR	Non-compliant curb ramps	Replace existing curb ramp [2] *	4 - Low	3 - Medium
4A - 603	DOBIE	NORTHCAPE DR / TEASDALE TER	Missing curb ramps	Add new curb ramp [2] *	1 - Very High	1 - Very High
4A - 604	DOBIE	NORTHCAPE DR / OCHILTREE DR	Missing curb ramps	Add new curb ramp [2]	2 - High	1 - Very High
4A - 605	DOBIE	GREENWICH DR / MARLBOROUGH DR	Missing curb ramps	Add new curb ramp [2] *	2 - High	1 - Very High
4A - 608	HART	GRAYLEDGE DR / HERMITAGE DR	Missing curb ramps	Add new curb ramp [3] *	1 - Very High	1 - Very High
4A - 610	DOBIE	CROWN RIDGE PATH / TEASDALE TER	Missing curb ramps	Add new curb ramp [2] *	1 - Very High	1 - Very High

DRAFT

Estimated Cost: Benefit rankings are preliminary, planning level-estimates to identify cost-effective options for addressing safety concerns. Estimated Cost: Benefit rankings are developed using planning level costs for projects of this nature. Individual project cost estimates will change as projects advance. See pages 4-5 of this report for more information about how the Safe Routes Program determines project prioritization and implementation.

Project ID	Nearby School(s)	Location	Issue	Recommendation + = parking removal required * = curb changes required ~ = private property acquisition required	Benefit Category	Cost:Benefit Category
4A - 611	GUERRERO THOMPSON, BARRINGTON	E RUNDBERG LN / NORTH CREEK DR	High speed crossing, Long crossing distance	Adjust signal timing	1 - Very High	1 - Very High
4A - 612	DOBIE	BONNIE BRAE / TEASDALE TER	Non-compliant curb ramps	Add new curb ramp [2] *	2 - High	1 - Very High
4A - 613	BARRINGTON	SLAYTON DR / W HOME PL	Missing curb ramps	Add new curb ramp [2]	1 - Very High	1 - Very High
4A - 614	BARRINGTON, GUERRERO THOMPSON	NORTH CREEK DR / ROCK HOLLOW LN	Missing curb ramps	Add new curb ramp [1]	1 - Very High	1 - Very High
4A - 615	BARRINGTON, GUERRERO THOMPSON	COOPER DR / SLAYTON DR	Faded crosswalk markings, High speed crossing	Intersection reconfiguration , pedestrian yield sign , Repaint crosswalk markings [1] across cooper dr and slayton dr	1 - Very High	1 - Very High
4A - 616	HART	DURHAM DR / HERMITAGE DR	Missing curb ramps	Add new curb ramp [4] *	1 - Very High	1 - Very High
4A - 618	DOBIE	CHILDRESS DR / MARLBOROUGH DR	Missing curb ramps	Add new curb ramp [2]	2 - High	1 - Very High
4A - 619	GUERRERO THOMPSON, BARRINGTON	PLOVER DR / W PHEASANT DR	Missing curb ramps	Add new curb ramp [2]	1 - Very High	1 - Very High
4A - 621	DOBIE	ABERDEEN WAY / E RUNDBERG LN	Non-compliant curb ramps	Add new curb ramp [2] *	1 - Very High	1 - Very High
4A - 624	DOBIE	ABERDEEN WAY / CHILDRESS DR	Difficult crossing, Missing curb ramps	Add new curb ramp [3] , Install high visibility crosswalk [2] across Childress Dr *	1 - Very High	1 - Very High
4A - 627	DOBIE	CHILDRESS DR / OCHILTREE DR	Missing curb ramps	Add new curb ramp [2]	1 - Very High	1 - Very High
4A - 628	DOBIE	CHILDRESS DR / FAYLIN DR	Missing curb ramps	Add new curb ramp [2] *	1 - Very High	1 - Very High

DRAFT

Estimated Cost: Benefit rankings are preliminary, planning level-estimates to identify cost-effective options for addressing safety concerns. Estimated Cost: Benefit rankings are developed using planning level costs for projects of this nature. Individual project cost estimates will change as projects advance. See pages 4-5 of this report for more information about how the Safe Routes Program determines project prioritization and implementation.

Project ID	Nearby School(s)	Location	Issue	Recommendation + = parking removal required * = curb changes required ~ = private property acquisition required	Benefit Category	Cost:Benefit Category
4A - 629	DOBIE	MARLBOROUGH DR / MARSTON CIR	Missing curb ramps	Add new curb ramp [2] *	2 - High	1 - Very High
4A - 630	DOBIE	AVEBURY CIR / MARLBOROUGH DR	Missing curb ramps	Add new curb ramp [2] *	2 - High	1 - Very High
4A - 631	BARRINGTON, GUERRERO THOMPSON	E RUNDBERG LN / GEORGIAN DR / W RUNDBERG LN	High speed crossing, Long crossing distance	Add Leading Pedestrian Interval (LPI) , Increase pedestrian crossing time	4 - Low	2 - High
4A - 632	DOBIE	ABERDEEN WAY / BONNIE BRAE	Non-compliant curb ramps	Add new curb ramp [2] *	1 - Very High	1 - Very High
4A - 635	DOBIE	ABERDEEN WAY / DOBIE DR	Non-compliant curb ramps	Add new curb ramp [2] *	1 - Very High	1 - Very High
4A - 636	WALNUT CREEK	E BRAKER LN / OAKWOOD DR	Non-compliant curb ramps	Replace existing curb ramp [2] *	4 - Low	3 - Medium
4A - 637	GUERRERO THOMPSON, BARRINGTON	ORIOLE DR / ROCK HOLLOW LN	Missing curb ramps	Add new curb ramp [2]	1 - Very High	1 - Very High
4A - 639	DOBIE	ABERDEEN WAY / TEASDALE TER	Non-compliant curb ramps	Add new curb ramp [2] *	1 - Very High	1 - Very High
4A - 640	HART	GRAYLEDGE DR / POTOMAC PATH	Missing curb ramps	Add new curb ramp [3] *	1 - Very High	1 - Very High
4A - 641	BARRINGTON, GUERRERO THOMPSON	SLAYTON DR / W RUNDBERG LN	Missing curb ramps	Add new curb ramp [1]	1 - Very High	1 - Very High
4A - 643	DOBIE	E RUNDBERG LN / MARLBOROUGH DR	Non-compliant curb ramps	Add new curb ramp [2] *	1 - Very High	1 - Very High
4A - 645	HART	HERMITAGE DR / LORALINDA DR	Missing curb ramps	Add new curb ramp [3] *	1 - Very High	1 - Very High
4A - 646	DOBIE	ABERDEEN WAY / POINT VISTA PL	Non-compliant curb ramps	Add new curb ramp [2] *	1 - Very High	1 - Very High
4A - 649	DOBIE	CHILDRESS DR / COTTLE DR	Missing curb ramps	Add new curb ramp [2]	1 - Very High	1 - Very High

DRAFT

Estimated Cost: Benefit rankings are preliminary, planning level-estimates to identify cost-effective options for addressing safety concerns. Estimated Cost: Benefit rankings are developed using planning level costs for projects of this nature. Individual project cost estimates will change as projects advance. See pages 4-5 of this report for more information about how the Safe Routes Program determines project prioritization and implementation.

Project ID	Nearby School(s)	Location	Issue	Recommendation + = parking removal required * = curb changes required ~ = private property acquisition required	Benefit Category	Cost:Benefit Category
4A - 650	BARRINGTON, GUERRERO THOMPSON	EASTWEND DR / W LONGSPUR BLVD	High speed crossing, Missing curb ramps	Add new curb ramp [2] , Install raised crosswalk [1] across Longspur Blvd	1 - Very High	1 - Very High
4A - 651	DOBIE	BRIGHTON CIR / BRIGHTON LN / MARLBOROUGH DR	Missing curb ramps	Add new curb ramp [2] *	2 - High	1 - Very High
4A - 653	WALNUT CREEK	HORNSBY ST / W BRAKER LN	Non-compliant curb ramps	Add median refuge island on Braker Ln , Replace existing curb ramp [2] *	1 - Very High	1 - Very High
4A - 654	HART	FENELON DR / TECUMSEH DR	Missing curb ramps	Add new curb ramp [2] *	2 - High	1 - Very High
4A - 655	HART	HERMITAGE DR / SHENANDOAH DR	Missing curb ramps	Add new curb ramp [3] *	1 - Very High	1 - Very High
4A - 656	GUERRERO THOMPSON	E PHEASANT DR / ORIOLE DR	Missing curb ramps	Add new curb ramp [2]	1 - Very High	1 - Very High
4A - 658	GUERRERO THOMPSON	E LONGSPUR BLVD / E STARLING DR	Missing curb ramps	Add new curb ramp [2]	1 - Very High	1 - Very High
4A - 660	DOBIE	COTTLE DR / NORTHCAPE DR	Missing curb ramps	Add new curb ramp [2]	1 - Very High	1 - Very High
4A - 661	DOBIE	MARLBOROUGH CIR / MARLBOROUGH DR	Missing curb ramps	Add new curb ramp [2] *	2 - High	1 - Very High
4A - 662	BARRINGTON, GUERRERO THOMPSON	SLAYTON DR / W FAWNRIDGE DR	Missing curb ramps	Add new curb ramp [1]	1 - Very High	1 - Very High
4A - 663	BARRINGTON	FLORENCE DR / GEORGIAN DR	Non-compliant curb ramps	Replace existing curb ramp [1]	4 - Low	3 - Medium
4A - 664	GUERRERO THOMPSON, BARRINGTON	GLENN LN / GORDON CT	Difficult crossing, Missing curb ramps	Add new curb ramp [2] , Install high visibility crosswalk [1] across Gordon and Glenn	3 - Medium	2 - High
4A - 665	DOBIE	HANSFORD DR / NORTHCAPE DR	Difficult crossing, Missing curb ramps	Add new curb ramp [4] , Install high visibility crosswalk [1] across Northcape Drive *	1 - Very High	1 - Very High

DRAFT

Estimated Cost: Benefit rankings are preliminary, planning level-estimates to identify cost-effective options for addressing safety concerns. Estimated Cost: Benefit rankings are developed using planning level costs for projects of this nature. Individual project cost estimates will change as projects advance. See pages 4-5 of this report for more information about how the Safe Routes Program determines project prioritization and implementation.

Project ID	Nearby School(s)	Location	Issue	Recommendation + = parking removal required * = curb changes required ~ = private property acquisition required	Benefit Category	Cost:Benefit Category
4A - 666	BARRINGTON, GUERRERO THOMPSON	E FAWNRIDGE DR / GEORGIAN DR / W FAWNRIDGE DR	Difficult crossing	Install high visibility crosswalk [1] across Georgian and fawnridge	3 - Medium	1 - Very High
4A - 667	BARRINGTON	E HOME PL / GEORGIAN DR / W HOME PL	Difficult crossing, Non-compliant curb ramps	Install high visibility crosswalk [4] across Home pl and Georgian , Replace existing curb ramp [2]	1 - Very High	1 - Very High
4A - 668	GUERRERO THOMPSON	E LONGSPUR BLVD / ORIOLE DR	Difficult crossing, Missing curb ramps	Add new curb ramp [4] , Install high visibility crosswalk [4] across orioles dr and brownie dr/longspur blvd	1 - Very High	1 - Very High
4A - 669	DOBIE	E RUNDBERG LN / NORTH PLZ	Difficult crossing	Increase pedestrian crossing time , Install high visibility crosswalk [2] across North Plaza & Rundberg Ln	1 - Very High	1 - Very High
4A - 670	DOBIE	TARTAN LN / TEASDALE TER	Difficult crossing	Add curb extensions [2] on Teasdale Terrace , Add median refuge island on Teasdale Terrace , Remove marked crosswalk on north side	1 - Very High	1 - Very High
4A - 671	DOBIE	ABERDEEN WAY / TARTAN LN	Difficult crossing	Add curb extensions [2] on Aberdeen Way , Add median refuge island on Aberdeen Way , Remove marked crosswalk on north side	1 - Very High	1 - Very High
4A - 672	DOBIE, GRAHAM	CHILDRESS DR / HANSFORD DR	Faded crosswalk markings	Install high visibility crosswalk [3] across Childress Dr & Hansford Dr	1 - Very High	1 - Very High
4A - 673	DOBIE	E RUNDBERG LN / MIDDLE FISKVILLE RD	Difficult crossing	Add new curb ramp [4] , Increase pedestrian crossing time	1 - Very High	1 - Very High
4A - 674	GUERRERO THOMPSON	BROWNIE DR / DIAMONDBACK TRL	Difficult crossing	Add curb extensions [2] on Brownie Dr , Add median refuge island on Diamondback Trl	1 - Very High	1 - Very High
4A - 675	HART	DANVILLE DR / FURNESS DR	Difficult crossing	Add curb extensions [2] on Furness Dr , Add median refuge island on Furness Dr	1 - Very High	1 - Very High
4A - 676	HART	FURNESS DR	Difficult crossing	Add curb extensions [2] on Furness Dr , Add median refuge island on Furness Dr	1 - Very High	1 - Very High
4A - 677	HART	PARK PLZ	Difficult crossing	Add curb extensions [2] on Park Plaza	1 - Very High	1 - Very High

DRAFT

Estimated Cost: Benefit rankings are preliminary, planning level-estimates to identify cost-effective options for addressing safety concerns. Estimated Cost: Benefit rankings are developed using planning level costs for projects of this nature. Individual project cost estimates will change as projects advance. See pages 4-5 of this report for more information about how the Safe Routes Program determines project prioritization and implementation.

Project ID	Nearby School(s)	Location	Issue	Recommendation + = parking removal required * = curb changes required ~ = private property acquisition required	Benefit Category	Cost:Benefit Category
4A - 678	GUERRERO THOMPSON, BARRINGTON	COOPER DR / GLENN LN	Difficult crossing	Add curb extensions [2] on Cooper Dr	1 - Very High	1 - Very High
4A - 851	GUERRERO THOMPSON, BARRINGTON	Near 9600 NORTH CREEK DR	No lighting	Add lighting to trail from school to West Rock Hollow Ln	3 - Medium	2 - High
4A - 901	WEBB, BARRINGTON	Near 404 FLORENCE DR	No trail connection	Add gate , Construct new shared use path ~	1 - Very High	1 - Very High
4A - 902	BARRINGTON	Near 503 CAPITOL DR	No trail connection	Add gate , Construct new shared use path ~	2 - High	2 - High
4A - 903	DOBIE, WALNUT CREEK	Near 10433 DOC HOLLIDAY TRL	No trail connection	Construct new shared use path	2 - High	2 - High
4A - 904	WEBB, BARRINGTON	Near 8511 ROSEMARY LN	No trail connection	Construct new shared use path	3 - Medium	2 - High
4A - 905	BARRINGTON	Near 8630 35 SVRD	No trail connection	Construct new shared use path	1 - Very High	5 - Very Low
4A - 906	BARRINGTON	Near 504 OERTLI LN	No trail connection	Add gate , Construct new shared use path	3 - Medium	3 - Medium
4A - 907	DOBIE	Near 9121 NORTH PLZ	No trail connection	Construct new shared use path	1 - Very High	3 - Medium
4A - 908	WALNUT CREEK, MCBEE	Near 500 FERGUSON DR	No trail connection	Add gate , Construct new shared use path	1 - Very High	4 - Low
4A - 909	DOBIE	Near 8927 FISKVILLE CEMETERY RD	No trail connection	Add gate , Construct new shared use path	2 - High	1 - Very High
4A - 910	BROWN	Near 500 ANDERSON LN	No trail connection	Construct over/underpass	1 - Very High	5 - Very Low

DRAFT

Estimated Cost: Benefit rankings are preliminary, planning level-estimates to identify cost-effective options for addressing safety concerns. Estimated Cost: Benefit rankings are developed using planning level costs for projects of this nature. Individual project cost estimates will change as projects advance. See pages 4-5 of this report for more information about how the Safe Routes Program determines project prioritization and implementation.

SCHOOL GROUP 4B

BLANTON ELEMENTARY

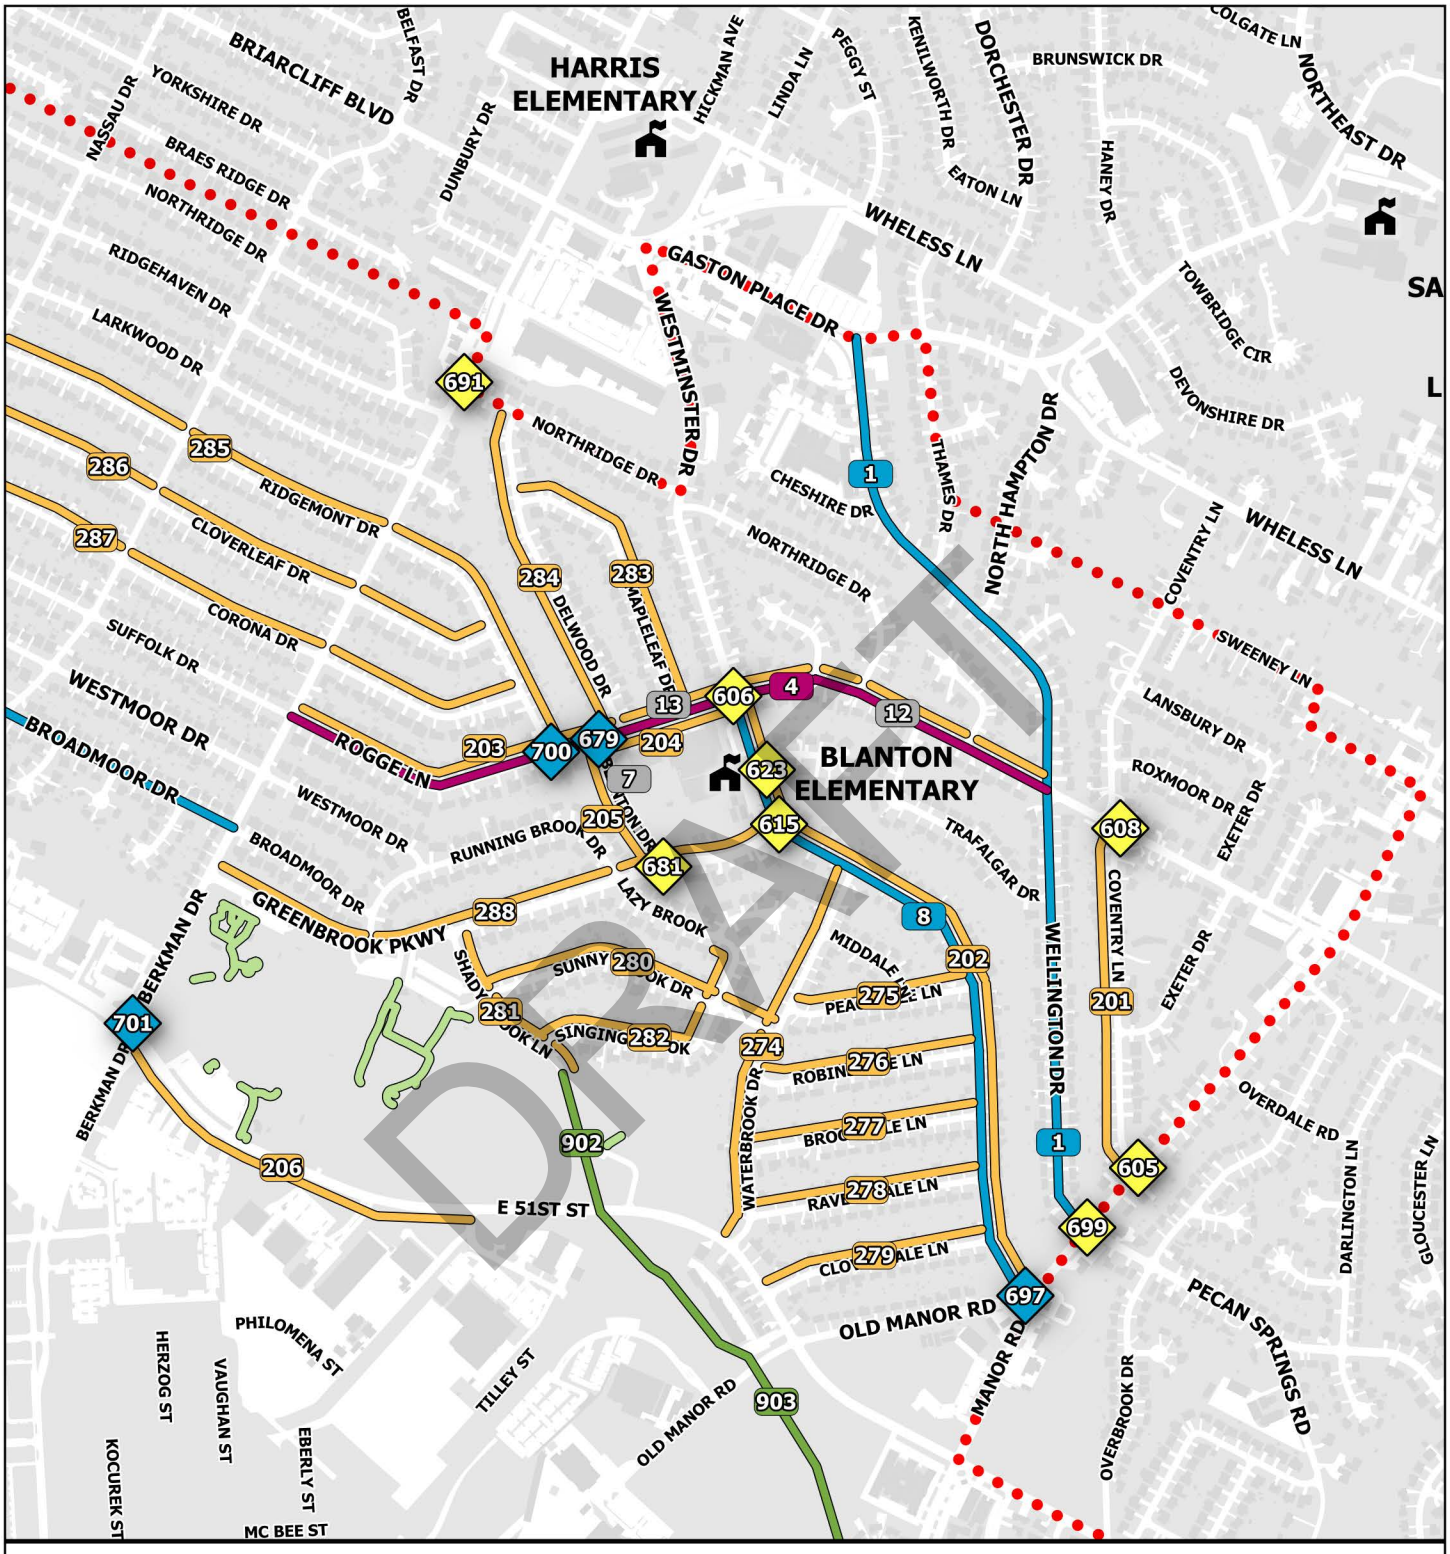

CITY OF AUSTIN FOUNDED 1839

CITY OF AUSTIN PUBLIC WORKS SAFE ROUTES TO SCHOOL

austin MOTION

IN 2016 MOBILITY BOND

TOOLE DESIGN

0 800 1600 2400 ft

- Off-Street Trail
- Bike Lane / Buffered Bike Lane / Protected Bike Lane
- Sidepath
- Neighborhood Bikeway / Traffic Calming
- New / Improved Sidewalk
- Other linear recommendation
- Traffic Control / Intersection Reconfiguration
- Ramp / Curb Extension / Crosswalk
- Over / Underpass
- Other Spot Recommendation
- Existing Trail
- School Boundary

SCHOOL GROUP 4B

BROWN ELEMENTARY

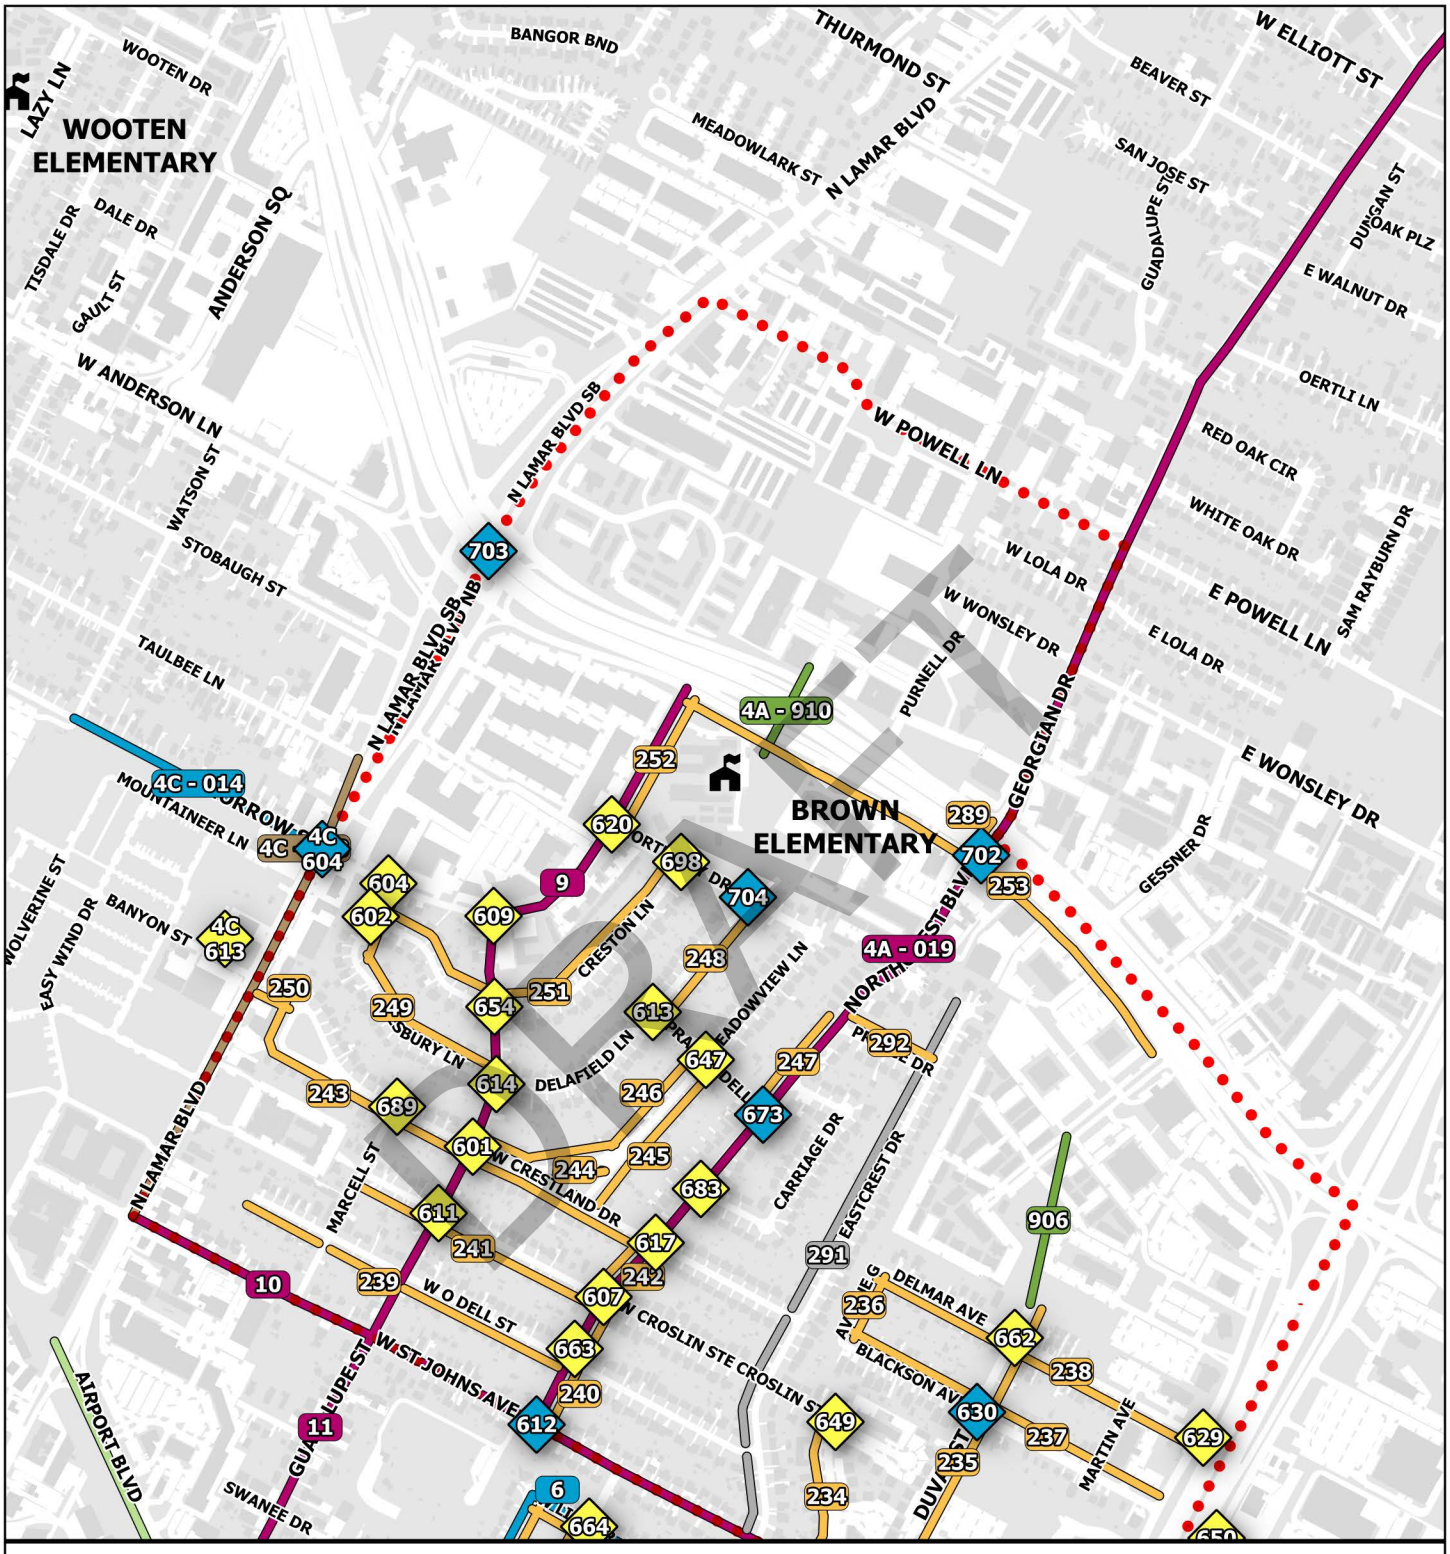

Off-Street Trail

Bike Lane / Buffered Bike Lane / Protected Bike Lane

Sidepath

Neighborhood Bikeway / Traffic Calming

New / Improved Sidewalk

Other linear recommendation

Traffic Control / Intersection Reconfiguration

Ramp / Curb Extension / Crosswalk

Over / Underpass

Other Spot Recommendation

Existing Trail

School Boundary

0 800 1600 2400 ft

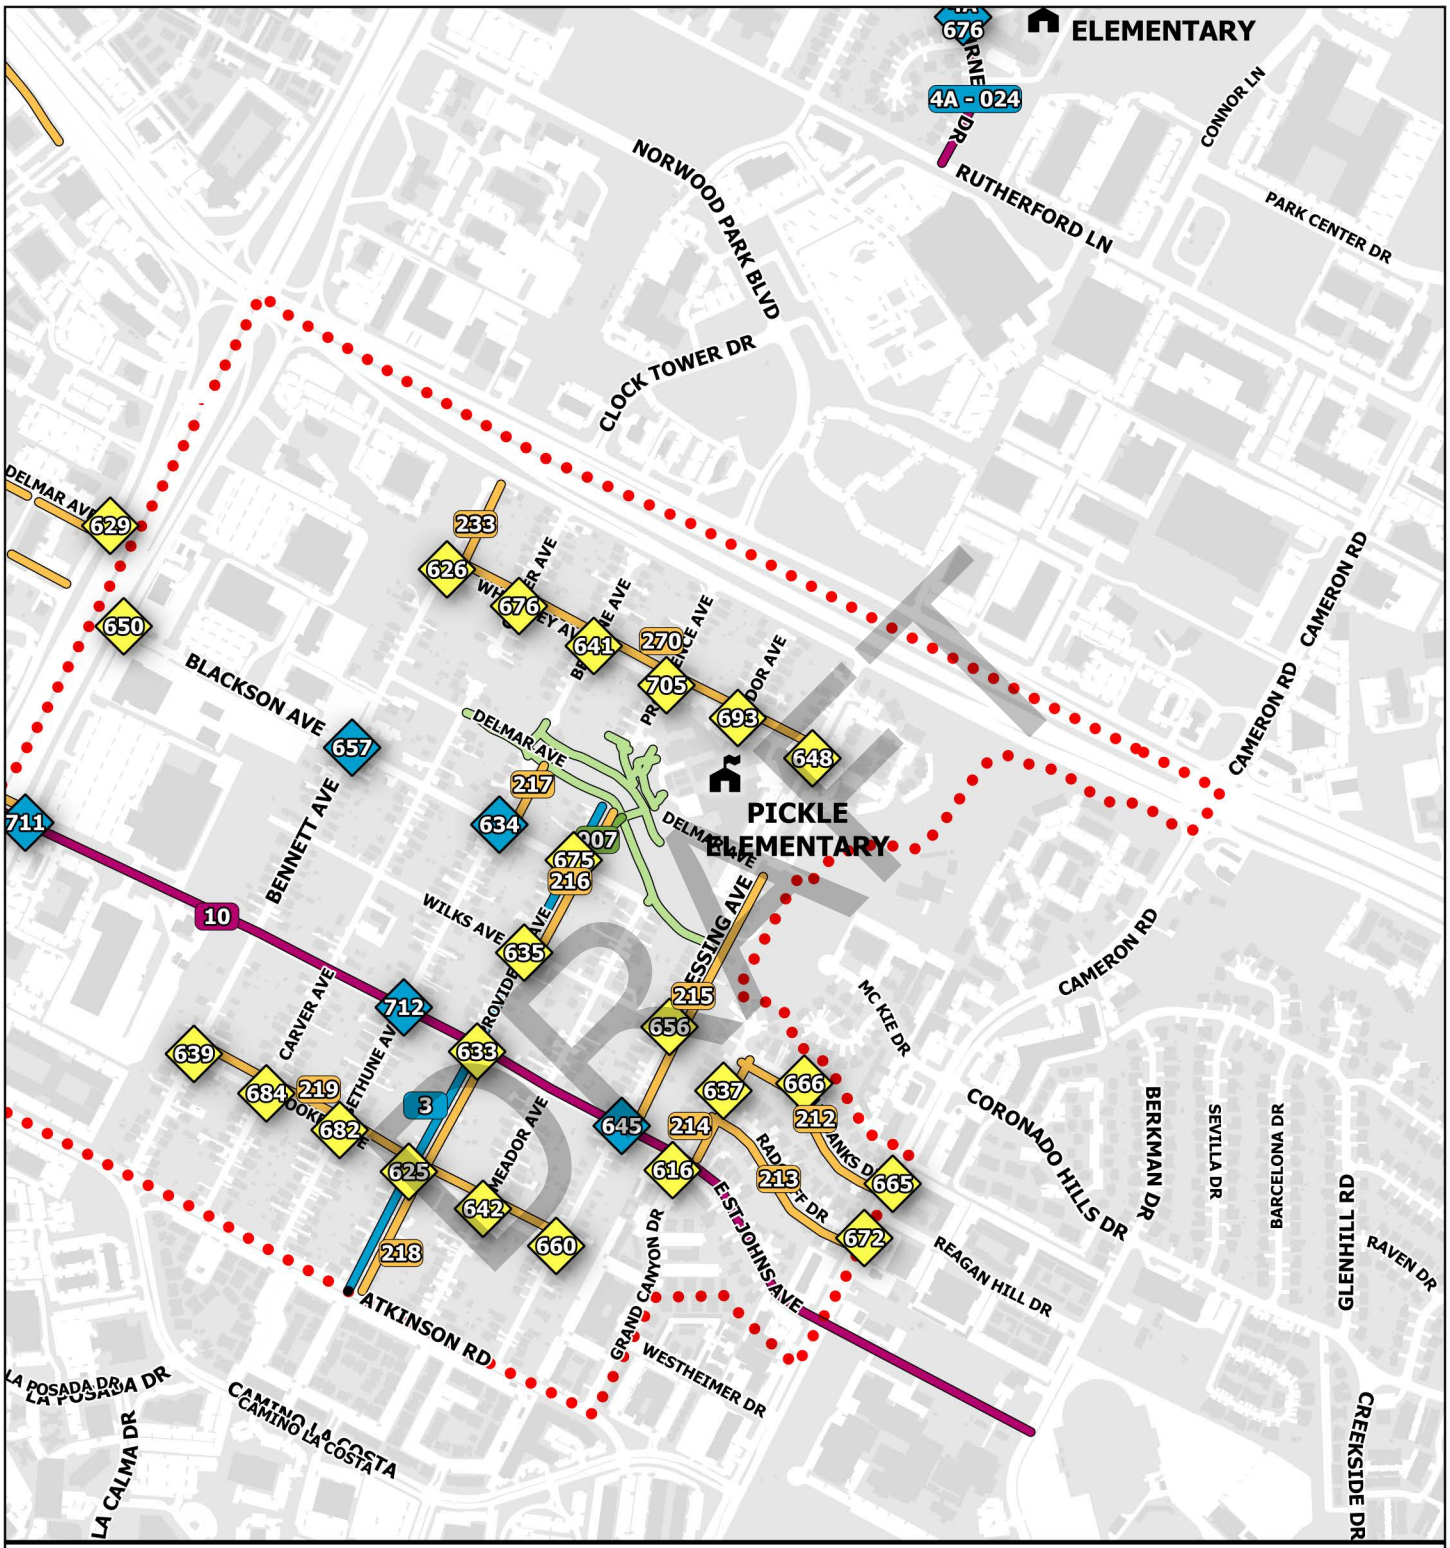
ELEMENTARY
4A - 024
676
CONNOR LN
RUTHERFORD LN
PARK CENTER DR
NORWOOD PARK BLVD
CLOCK TOWER DR
CAMERON RD
DELMAR AVE
629
650
BLACKSON AVE
657
BENNETT AVE
711
10
233
626
676
641
270
705
693
648
217
634
207
675
216
635
WILKS AVE
PICKLE ELEMENTARY
712
639
684
219
682
625
642
660
218
633
3
215
656
645
214
616
637
666
212
665
213
672
CORONADO HILLS DR
BERKMAN DR
SEVILLA DR
BARCELONA DR
GLENHILL RD
RAVEN DR
REAGAN HILL DR
MC KIE DR
ATKINSON RD
GRAND CANYON DR
WESTHEIMER DR
LA POSADA DR
CAMINO LA COSTA
LA CALMA DR
CREEKSIDE DR
0
800
1600
2400 ft
Off-Street Trail
Bike Lane / Buffered Bike Lane / Protected Bike Lane
Sidepath
Neighborhood Bikeway / Traffic Calming
New / Improved Sidewalk
Other linear recommendation
Traffic Control / Intersection Reconfiguration
Ramp / Curb Extension / Crosswalk
Over / Underpass
Other Spot Recommendation
Existing Trail
School Boundary

SCHOOL GROUP 4B

REILLY ELEMENTARY

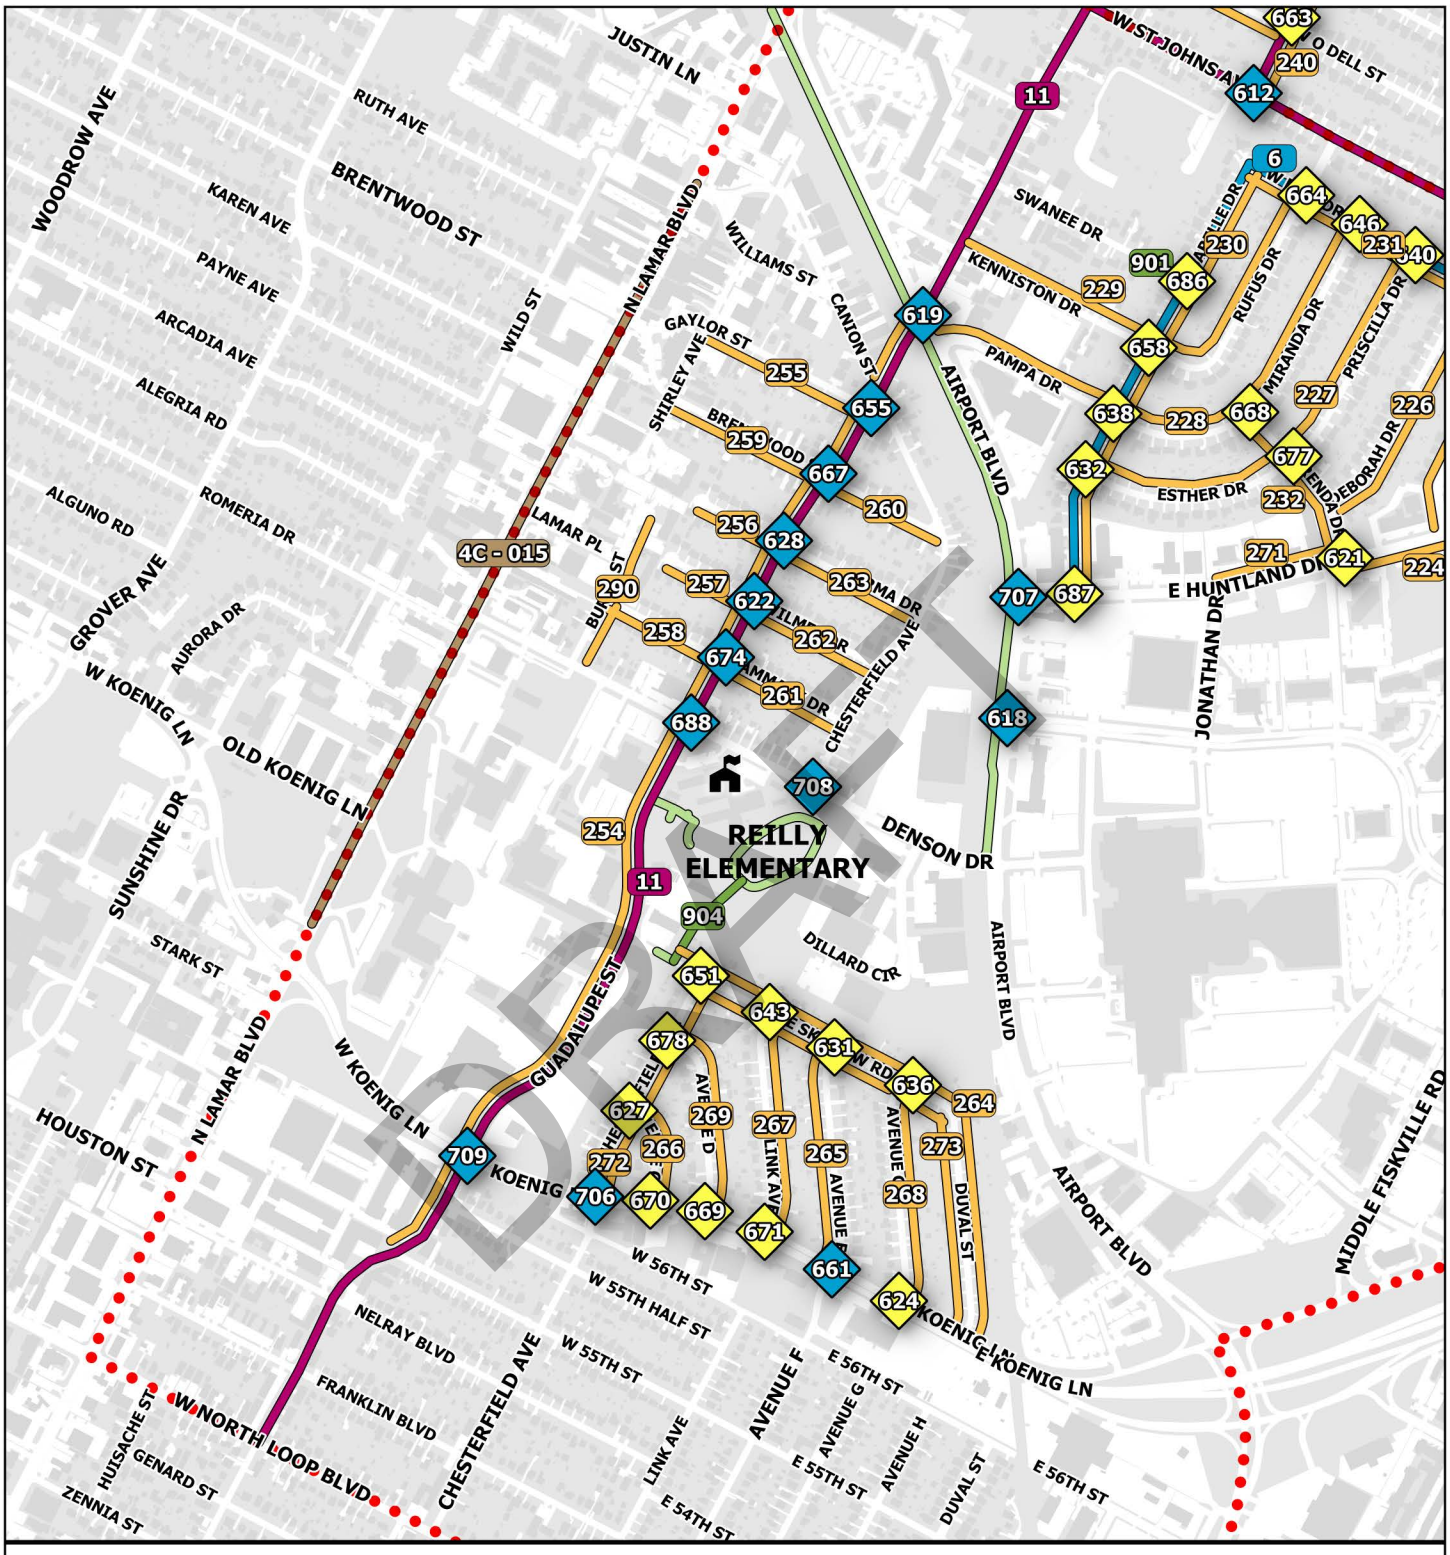

DRAFT

Off-Street Trail

Bike Lane / Buffered Bike Lane / Protected Bike Lane

Sidepath

Neighborhood Bikeway / Traffic Calming

New / Improved Sidewalk

Other linear recommendation

Traffic Control / Intersection Reconfiguration

Ramp / Curb Extension / Crosswalk

Over / Underpass

Other Spot Recommendation

Existing Trail

School Boundary

0 800 1600 2400 ft

Spencer Gardner 2019.09.4 \\dca-file01\S0000\5611_P_Austin_SRTS\PRODUCTION\GIS\QGIS\2D1906_June\ph_4_base.qgz

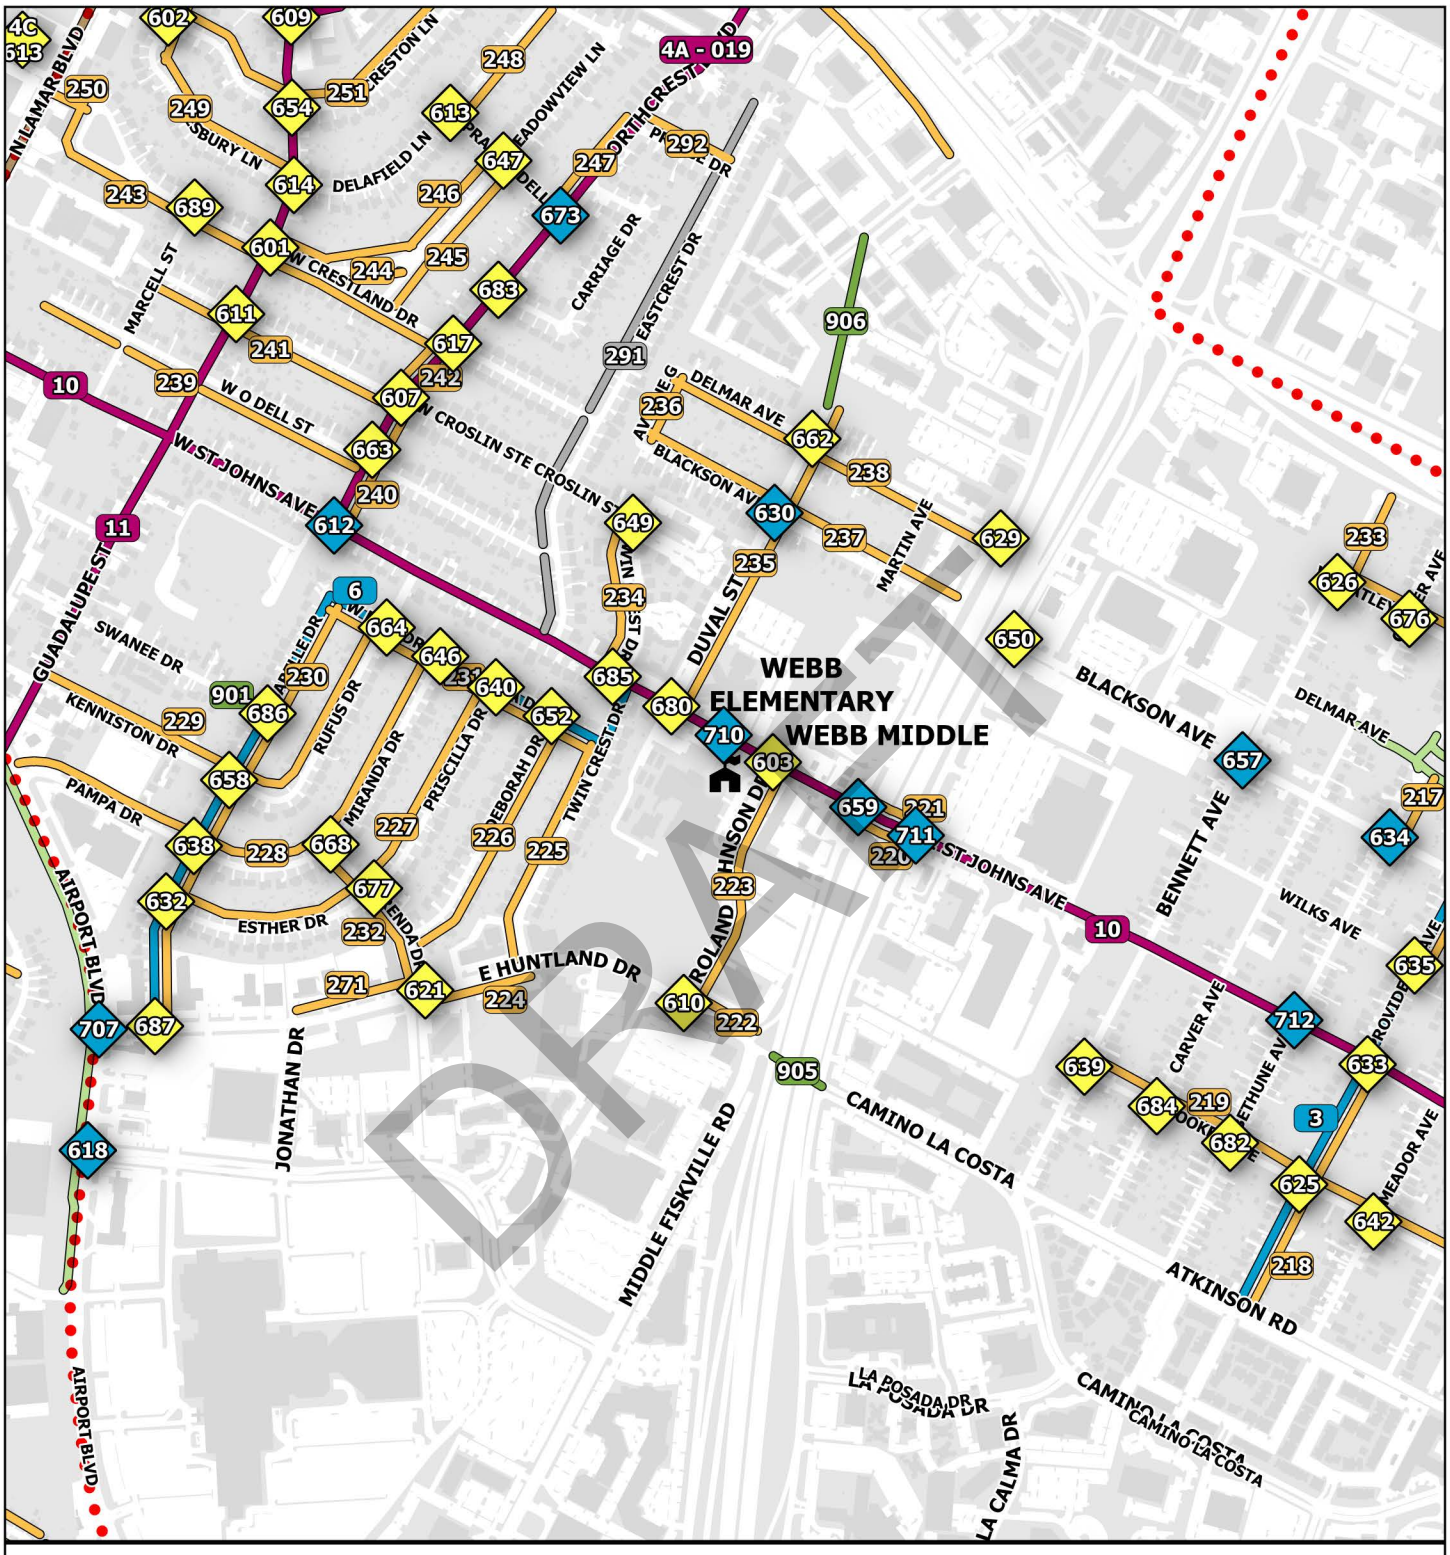
WEBB ELEMENTARY
WEBB MIDDLE
DRAFT
W ST JOHNS AVE
E HUNTLAND DR
DELMAR AVE
BLACKSON AVE
DUVAL ST
BENNETT AVE
WILKS AVE
CAMINO LA COSTA
ATKINSON RD
MIDDLE FISKVILLE RD
JONATHAN DR
AIRPORT BLVD
GUADALUPE ST
MARCELL ST
W CRESTLAND DR
W O DELL ST
DELAFIELD LN
CARRIAGE DR
EASTCREST DR
MARTIN AVE
ROLAND DR
CARVER AVE
MEADOR AVE
LA POSADA DR
LA CALMA DR
SWANEE DR
KENNISTON DR
PAMPA DR
ESTHER DR
RUFUS DR
MIRANDA DR
PRISCILLA DR
DEBORAH DR
TWIN CREST DR
LENDA DR
ARGYLE DR

Off-Street Trail
Bike Lane / Buffered Bike Lane / Protected Bike Lane
Sidepath
Neighborhood Bikeway / Traffic Calming
New / Improved Sidewalk
Other linear recommendation
Traffic Control / Intersection Reconfiguration
Ramp / Curb Extension / Crosswalk
Over / Underpass
Other Spot Recommendation
Existing Trail
School Boundary
0
800
1600
2400 ft

Project ID	Nearby School(s)	Location	Issue	Recommendation + = parking removal required * = curb changes required ~ = private property acquisition required	Benefit Category	Cost:Benefit Category
4B - 002	BLANTON	BROADMOOR DR	Desired bike route, No bike facility, Wide ROW	Add neighborhood bikeway - BROADMOOR DR from BERKMAN DR to CAMERON RD	2 - High	2 - High
4B - 003	PICKLE	PROVIDENCE AVE	No bike facility	Add neighborhood bikeway - PROVIDENCE AVE from PICKLE ELEMENTARY to ATKINSON RD	1 - Very High	1 - Very High
4B - 004	HARRIS, BLANTON	ROGGE LN	No bike facility	Add protected bike lane - ROGGE LN from WELLINGTON DR to BERKMAN DR	1 - Very High	2 - High
4B - 006	REILLY, WEBB, WEBB	ISABELLE DR	No bike facility	Add neighborhood bikeway - ISABELLE DR from W LISA DR to W HUNTLAND DR , Add neighborhood bikeway - W LISA DR from ISABELLE DR to E LISA DR , Add neighborhood bikeway - E LISA DR from TWIN CREST DR to MIRANDA DR , Add neighborhood bikeway - TWIN CREST DR from E LISA DR to E ST JOHNS AVE *	1 - Very High	1 - Very High
4B - 007	BLANTON	BLANTON DR	Excessive vehicle speeds	Lane diet (changing lane widths) - BLANTON DR from GREENBROOK PKWY to ROGGE LN	1 - Very High	1 - Very High
4B - 009	BROWN	GUADALUPE ST	No bike facility	Add protected bike lane - GUADALUPE ST from W ST JOHNS AVE to W ANDERSON LN SVRD EB	2 - High	3 - Medium
4B - 010	WEBB, WEBB, PICKLE	E ST JOHNS AVE	Desired bike route	Add vertical element to existing buffer - W ST JOHNS AVE from N LAMAR BLVD to E ST JOHNS AVE , Add vertical element to existing buffer - E ST JOHNS AVE from W ST JOHNS AVE to BERKMAN DR	2 - High	5 - Very Low
4B - 011	REILLY	GUADALUPE ST	No bike facility	Add protected bike lane - GUADALUPE ST from W ST JOHNS AVE to W NORTH LOOP BLVD	1 - Very High	4 - Low
4B - 013	HARRIS, BLANTON	ROGGE LN	Excessive vehicle speeds	Add School Zone Sign with flashers - ROGGE LN from RIDGEMONT DR to DELWOOD CT	1 - Very High	1 - Very High

Estimated Cost: Benefit rankings are preliminary, planning level-estimates to identify cost-effective options for addressing safety concerns. Estimated Cost: Benefit rankings are developed using planning level costs for projects of this nature. Individual project cost estimates will change as projects advance. See pages 4-5 of this report for more information about how the Safe Routes Program determines project prioritization and implementation.

DRAFT

Project ID	Nearby School(s)	Location	Issue	Recommendation + = parking removal required * = curb changes required ~ = private property acquisition required	Benefit Category	Cost:Benefit Category
4B - 203	BLANTON, HARRIS	ROGGE LN	Missing sidewalk	Construct new sidewalk - ROGGE LN from WELLINGTON DR to BERKMAN DR	1 - Very High	3 - Medium
4B - 204	BLANTON, HARRIS	ROGGE LN	Poor condition	Repair existing sidewalk - ROGGE LN from WESTMINSTER DR to BLANTON DR	4 - Low	4 - Low
4B - 205	BLANTON	BLANTON DR	Missing sidewalk	Construct new sidewalk - BLANTON DR from GREENBROOK PKWY to ROGGE LN	3 - Medium	3 - Medium
4B - 212	PICKLE	FAIRBANKS DR	Missing sidewalk	Construct new sidewalk - FAIRBANKS DR from CAMERON RD to GRAND CANYON DR	1 - Very High	2 - High
4B - 213	PICKLE	RADCLIFF DR	Missing sidewalk	Construct new sidewalk - RADCLIFF DR from GRAND CANYON DR to CAMERON RD	1 - Very High	2 - High
4B - 214	PICKLE	GRAND CANYON DR	Missing sidewalk	Construct new sidewalk - GRAND CANYON DR from E ST JOHNS AVE to FAIRBANKS DR	1 - Very High	1 - Very High
4B - 215	PICKLE	BLESSING AVE	Missing sidewalk	Construct new sidewalk - BLESSING AVE from DELMAR AVE to E ST JOHNS AVE	1 - Very High	2 - High
4B - 216	PICKLE	PROVIDENCE AVE	Missing sidewalk, Poor condition	Repair existing sidewalk - PROVIDENCE AVE from WILKS AVE to BLACKSON AVE , Construct new sidewalk - PROVIDENCE AVE from Buttermilk Branch Trail to BLACKSON AVE	1 - Very High	1 - Very High
4B - 217	PICKLE	BETHUNE AVE	Missing sidewalk	Construct new sidewalk - BETHUNE AVE from Near 7411 BETHUNE AVE to BLACKSON AVE	3 - Medium	2 - High
4B - 218	PICKLE	PROVIDENCE AVE	Missing sidewalk	Construct new sidewalk - PROVIDENCE AVE from E ST JOHNS AVE to ATKINSON RD	3 - Medium	4 - Low
4B - 219	WEBB, PICKLE, WEBB	BOOKER AVE	Conflict with bicycles, Missing sidewalk	Construct new sidewalk - BOOKER AVE from BENNETT AVE to BLESSING AVE	2 - High	4 - Low
4B - 220	WEBB, WEBB	E ST JOHNS AVE	Narrow sidewalk	Widen existing sidewalk - E ST JOHNS AVE from N IH 35 SVRD NB to N IH 35 SVRD SB , School officials requested pedestrian barriers between motorized traffic and as additional protection on outside of bridge - E ST JOHNS AVE from N IH 35 SVRD NB to N IH 35 SVRD SB	3 - Medium	2 - High

DRAFT

Estimated Cost: Benefit rankings are preliminary, planning level-estimates to identify cost-effective options for addressing safety concerns. Estimated Cost: Benefit rankings are developed using planning level costs for projects of this nature. Individual project cost estimates will change as projects advance. See pages 4-5 of this report for more information about how the Safe Routes Program determines project prioritization and implementation.

Project ID	Nearby School(s)	Location	Issue	Recommendation + = parking removal required * = curb changes required ~ = private property acquisition required	Benefit Category	Cost:Benefit Category
4B - 221	WEBB, WEBB	E ST JOHNS AVE	Narrow sidewalk	Widen existing sidewalk - E ST JOHNS AVE from N IH 35 SVRD NB to N IH 35 SVRD SB , School officials requested pedestrian barriers between motorized traffic and as additional protection on outside of bridge - E ST JOHNS AVE from N IH 35 SVRD NB to N IH 35 SVRD SB	3 - Medium	2 - High
4B - 222	WEBB, WEBB	E HUNTLAND DR	Missing sidewalk	Construct new sidewalk - E HUNTLAND DR from ROLAND JOHNSON DR to N IH 35 SB TO HUNTLAND RAMP	1 - Very High	1 - Very High
4B - 223	WEBB, WEBB	ROLAND JOHNSON DR	Missing sidewalk	Construct new sidewalk - ROLAND JOHNSON DR from E ST JOHNS AVE to E HUNTLAND DR	1 - Very High	1 - Very High
4B - 224	WEBB, WEBB	E HUNTLAND DR	Missing sidewalk	Construct new sidewalk - E HUNTLAND DR from TWIN CREST DR to BRENDA DR	2 - High	2 - High
4B - 225	WEBB, WEBB	TWIN CREST DR	Missing sidewalk	Construct new sidewalk - TWIN CREST DR from E LISA DR to E HUNTLAND DR	2 - High	3 - Medium
4B - 226	WEBB, WEBB	DEBORAH DR	Missing sidewalk	Construct new sidewalk - DEBORAH DR from E LISA DR to BRENDA DR	2 - High	3 - Medium
4B - 227	WEBB, REILLY, WEBB	ESTHER DR	Missing sidewalk	Construct new sidewalk - ESTHER DR from ISABELLE DR to BRENDA DR , Construct new sidewalk - PRISCILLA DR from E LISA DR to BRENDA DR	2 - High	4 - Low
4B - 228	WEBB, WEBB, REILLY	MIRANDA DR	Missing sidewalk	Construct new sidewalk - PAMPA DR from MIRANDA DR to AIRPORT BLVD , Construct new sidewalk - MIRANDA DR from W LISA DR to ISABELLE DR	2 - High	4 - Low
4B - 229	WEBB, WEBB	KENNISTON DR	Missing sidewalk	Construct new sidewalk - KENNISTON DR from RUFUS DR to GUADALUPE ST , Construct new sidewalk - RUFUS DR from W LISA DR to KENNISTON DR	3 - Medium	4 - Low
4B - 230	REILLY, WEBB, WEBB	ISABELLE DR	Missing sidewalk	Construct new sidewalk - ISABELLE DR from W LISA DR to W HUNTLAND DR	3 - Medium	4 - Low

DRAFT

Estimated Cost: Benefit rankings are preliminary, planning level-estimates to identify cost-effective options for addressing safety concerns. Estimated Cost: Benefit rankings are developed using planning level costs for projects of this nature. Individual project cost estimates will change as projects advance. See pages 4-5 of this report for more information about how the Safe Routes Program determines project prioritization and implementation.

Project ID	Nearby School(s)	Location	Issue	Recommendation + = parking removal required * = curb changes required ~ = private property acquisition required	Benefit Category	Cost:Benefit Category
4B - 231	WEBB, WEBB	E LISA DR	Missing sidewalk	Construct new sidewalk - W LISA DR from ISABELLE DR to MIRANDA DR , Construct new sidewalk - E LISA DR from TWIN CREST DR to MIRANDA DR	2 - High	3 - Medium
4B - 232	WEBB, WEBB	BRENDA DR	Missing sidewalk, Temporary obstruction (ex. vegetation)	Construct new sidewalk - BRENDA DR from MIRANDA DR to E HUNTLAND DR	3 - Medium	3 - Medium
4B - 233	PICKLE	BENNETT AVE	Missing sidewalk	Construct new sidewalk - BENNETT AVE from Near 7615 BENNETT AVE to WHEATLEY AVE	2 - High	2 - High
4B - 234	WEBB, WEBB	TWIN CREST DR	Missing sidewalk	Construct new sidewalk - TWIN CREST DR from E CROSLIN ST to E ST JOHNS AVE	2 - High	2 - High
4B - 235	WEBB, WEBB	DUVAL ST	Missing sidewalk	Construct new sidewalk - DUVAL ST from E ST JOHNS AVE to north end	1 - Very High	2 - High
4B - 236	WEBB, BROWN, WEBB	AVENUE G	Missing sidewalk	Construct new sidewalk - AVENUE G from BLACKSON AVE to DELMAR AVE	3 - Medium	2 - High
4B - 237	WEBB, WEBB	BLACKSON AVE	Missing sidewalk, Narrow sidewalk	Construct new sidewalk - BLACKSON AVE from AVENUE G to MARTIN AVE , Widen existing sidewalk - BLACKSON AVE from MARTIN AVE to N IH 35 SVRD SB	2 - High	4 - Low
4B - 238	WEBB, WEBB, BROWN	DELMAR AVE	Missing sidewalk, Poor condition	Construct new sidewalk - DELMAR AVE from AVENUE G to N IH 35 SVRD SB	3 - Medium	4 - Low
4B - 239	WEBB, WEBB	W O DELL ST	Missing sidewalk	Construct new sidewalk - W O DELL ST from NORTHCREST BLVD to Near 625 O DELL ST	3 - Medium	4 - Low
4B - 240	WEBB, BROWN, WEBB	NORTHCREST BLVD	Missing sidewalk, Narrow sidewalk	Construct new sidewalk - NORTHCREST BLVD from W ST JOHNS AVE to W CROSLIN ST	3 - Medium	2 - High
4B - 241	BROWN, WEBB, WEBB	W CROSLIN ST	Missing sidewalk	Construct new sidewalk - W CROSLIN ST from NORTHCREST BLVD to MARCELL ST	3 - Medium	4 - Low
4B - 242	WEBB, BROWN, WEBB	NORTHCREST BLVD	Missing sidewalk	Construct new sidewalk - NORTHCREST BLVD from W CRESTLAND DR to W CROSLIN ST	3 - Medium	2 - High

DRAFT

Estimated Cost: Benefit rankings are preliminary, planning level-estimates to identify cost-effective options for addressing safety concerns. Estimated Cost: Benefit rankings are developed using planning level costs for projects of this nature. Individual project cost estimates will change as projects advance. See pages 4-5 of this report for more information about how the Safe Routes Program determines project prioritization and implementation.

Project ID	Nearby School(s)	Location	Issue	Recommendation + = parking removal required * = curb changes required ~ = private property acquisition required	Benefit Category	Cost:Benefit Category
4B - 243	WEBB, WEBB, BROWN	W CRESTLAND DR	Missing sidewalk	Construct new sidewalk - W CRESTLAND DR from NORTHCREST BLVD to Near 715 CRESTLAND DR	3 - Medium	4 - Low
4B - 244	BROWN	MEADOWVIEW LN	Missing sidewalk	Construct new sidewalk - MEADOWVIEW LN along Meadowview Triangle Park	3 - Medium	2 - High
4B - 245	BROWN	MEADOWVIEW LN	Missing sidewalk	Construct new sidewalk - MEADOWVIEW LN from PRAIRIE DELL to W CRESTLAND DR	3 - Medium	3 - Medium
4B - 246	BROWN	MEADOWVIEW LN	Missing sidewalk	Construct new sidewalk - W CRESTLAND DR from MEADOWVIEW LN to GUADALUPE ST , Construct new sidewalk - MEADOWVIEW LN from PRAIRIE DELL to W CRESTLAND DR	3 - Medium	4 - Low
4B - 247	BROWN	NORTHCREST BLVD	Missing sidewalk	Construct new sidewalk - NORTHCREST BLVD from PRAIRIE DELL to PRINCE DR	2 - High	2 - High
4B - 248	BROWN	DELAFIELD LN	Missing sidewalk	Construct new sidewalk - DELAFIELD LN from PRAIRIE DELL to NORTHWAY DR	3 - Medium	3 - Medium
4B - 249	BROWN	PAXTON ST	Missing sidewalk	Construct new sidewalk - PAXTON ST from AMESBURY LN to MORROW ST , Construct new sidewalk - AMESBURY LN from GUADALUPE ST to PAXTON ST	3 - Medium	4 - Low
4B - 250	BROWN	W CRESTLAND DR	Missing sidewalk	Construct new sidewalk - W CRESTLAND DR from Near 715 CRESTLAND DR to N LAMAR BLVD	4 - Low	2 - High
4B - 251	BROWN	BISSONET LN	Missing sidewalk	Construct new sidewalk - BISSONET LN from PAXTON ST to GUADALUPE ST , Construct new sidewalk - CRESTON LN from NORTHWAY DR to GUADALUPE ST	3 - Medium	4 - Low
4B - 252	BROWN	GUADALUPE ST	Poor condition	Repair existing sidewalk - GUADALUPE ST from NORTHWAY DR to W ANDERSON LN SVRD EB	5 - Very Low	4 - Low

DRAFT

Estimated Cost: Benefit rankings are preliminary, planning level-estimates to identify cost-effective options for addressing safety concerns. Estimated Cost: Benefit rankings are developed using planning level costs for projects of this nature. Individual project cost estimates will change as projects advance. See pages 4-5 of this report for more information about how the Safe Routes Program determines project prioritization and implementation.

Project ID	Nearby School(s)	Location	Issue	Recommendation + = parking removal required * = curb changes required ~ = private property acquisition required	Benefit Category	Cost:Benefit Category
4B - 253	BROWN	E ANDERSON LN SVRD EB	Narrow sidewalk	Widen existing sidewalk - W ANDERSON LN SVRD EB from GUADALUPE ST to NORTHCREST BLVD , Widen existing sidewalk - E ANDERSON LN SVRD EB from CHEVY CHASE DR to NORTHCREST BLVD	2 - High	4 - Low
4B - 254	REILLY	GUADALUPE ST	Missing sidewalk	Construct new sidewalk - GUADALUPE ST from W KOENIG LN to W 55TH ST , Construct new sidewalk - GUADALUPE ST from AIRPORT BLVD to W KOENIG LN	2 - High	5 - Very Low
4B - 255	REILLY	GAYLOR ST	Missing sidewalk	Construct new sidewalk - GAYLOR ST from GUADALUPE ST to SHIRLEY AVE	4 - Low	4 - Low
4B - 256	REILLY	IRMA DR	Missing sidewalk	Construct new sidewalk - IRMA DR from GUADALUPE ST to Near 613 IRMA DR	3 - Medium	3 - Medium
4B - 257	REILLY	WILMES DR	Missing sidewalk	Construct new sidewalk - WILMES DR from GUADALUPE ST to Near 615 WILMES DR	3 - Medium	3 - Medium
4B - 258	REILLY	HAMMACK DR	Missing sidewalk	Construct new sidewalk - HAMMACK DR from GUADALUPE ST to BURNS ST	3 - Medium	3 - Medium
4B - 259	REILLY	BRENTWOOD ST	Missing sidewalk	Construct new sidewalk - BRENTWOOD ST from GUADALUPE ST to SHIRLEY AVE	4 - Low	4 - Low
4B - 260	REILLY	BRENTWOOD ST	Missing sidewalk	Construct new sidewalk - BRENTWOOD ST from CANION ST to GUADALUPE ST	4 - Low	4 - Low
4B - 261	REILLY	HAMMACK DR	Missing sidewalk	Construct new sidewalk - HAMMACK DR from GUADALUPE ST to CHESTERFIELD AVE	3 - Medium	3 - Medium
4B - 262	REILLY	WILMES DR	Missing sidewalk	Construct new sidewalk - WILMES DR from GUADALUPE ST to CHESTERFIELD AVE	3 - Medium	3 - Medium
4B - 263	REILLY	IRMA DR	Missing sidewalk	Construct new sidewalk - IRMA DR from CHESTERFIELD AVE to GUADALUPE ST	3 - Medium	3 - Medium

DRAFT

Estimated Cost: Benefit rankings are preliminary, planning level-estimates to identify cost-effective options for addressing safety concerns. Estimated Cost: Benefit rankings are developed using planning level costs for projects of this nature. Individual project cost estimates will change as projects advance. See pages 4-5 of this report for more information about how the Safe Routes Program determines project prioritization and implementation.

Project ID	Nearby School(s)	Location	Issue	Recommendation + = parking removal required * = curb changes required ~ = private property acquisition required	Benefit Category	Cost:Benefit Category
4B - 264	REILLY	E SKYVIEW RD	Missing sidewalk	Construct new sidewalk - W SKYVIEW RD from E SKYVIEW RD to Near 304 SKYVIEW RD , Construct new sidewalk - E SKYVIEW RD from DUVAL ST to W SKYVIEW RD , Construct new sidewalk - DUVAL ST from E SKYVIEW RD to E KOENIG LN	3 - Medium	4 - Low
4B - 265	REILLY	AVENUE F	Missing sidewalk	Construct new sidewalk - AVENUE F from E KOENIG LN to E SKYVIEW RD	4 - Low	4 - Low
4B - 266	REILLY	AVENUE C	Missing sidewalk	Construct new sidewalk - AVENUE C from W KOENIG LN to CHESTERFIELD AVE	4 - Low	4 - Low
4B - 267	REILLY	LINK AVE	Missing sidewalk	Construct new sidewalk - LINK AVE from W KOENIG LN to W SKYVIEW RD	4 - Low	4 - Low
4B - 268	REILLY	AVENUE G	Missing sidewalk	Construct new sidewalk - AVENUE G from E SKYVIEW RD to E KOENIG LN	4 - Low	4 - Low
4B - 269	REILLY	AVENUE D	Missing sidewalk	Construct new sidewalk - AVENUE D from W KOENIG LN to CHESTERFIELD AVE	4 - Low	4 - Low
4B - 270	PICKLE	WHEATLEY AVE	Missing sidewalk	Construct new sidewalk - WHEATLEY AVE from BENNETT AVE to BLESSING AVE	1 - Very High	2 - High
4B - 271	WEBB, REILLY, WEBB	E HUNTLAND DR	Missing sidewalk	Construct new sidewalk - E HUNTLAND DR from BRENDA DR to JONATHAN DR	2 - High	2 - High
4B - 272	REILLY	CHESTERFIELD AVE	Missing sidewalk	Construct new sidewalk - CHESTERFIELD AVE from W SKYVIEW RD to W KOENIG LN	4 - Low	4 - Low
4B - 273	REILLY	E SKYVIEW RD	Missing sidewalk	Construct new sidewalk - W SKYVIEW RD from CHESTERFIELD AVE to E SKYVIEW RD , Construct new sidewalk - E SKYVIEW RD from W SKYVIEW RD to DUVAL ST , Construct new sidewalk - DUVAL ST from E SKYVIEW RD to E KOENIG LN	3 - Medium	4 - Low

DRAFT

Estimated Cost: Benefit rankings are preliminary, planning level-estimates to identify cost-effective options for addressing safety concerns. Estimated Cost: Benefit rankings are developed using planning level costs for projects of this nature. Individual project cost estimates will change as projects advance. See pages 4-5 of this report for more information about how the Safe Routes Program determines project prioritization and implementation.

Project ID	Nearby School(s)	Location	Issue	Recommendation + = parking removal required * = curb changes required ~ = private property acquisition required	Benefit Category	Cost:Benefit Category
4B - 274	BLANTON	WATERBROOK DR	Missing sidewalk	Construct new sidewalk - WATERBROOK DR from BROOKDALE LN to E 51ST ST , Construct new sidewalk - WATERBROOK DR from BROOKDALE LN to ROBINSDALE LN , Construct new sidewalk - WATERBROOK DR from ROBINSDALE LN to WESTMINSTER DR	1 - Very High	3 - Medium
4B - 275	BLANTON	PEACEDALE LN	Missing sidewalk	Construct new sidewalk - PEACEDALE LN from WESTMINSTER DR to WATERBROOK DR	4 - Low	4 - Low
4B - 280	BLANTON	SUNNY BROOK DR	Missing sidewalk	Construct new sidewalk - SUNNY BROOK DR from WATERBROOK DR to SHADY BROOK LN	4 - Low	5 - Very Low
4B - 281	BLANTON	SHADY BROOK LN	Missing sidewalk	Construct new sidewalk - SHADY BROOK LN from end to GREENBROOK PKWY	5 - Very Low	5 - Very Low
4B - 282	BLANTON	SINGING BROOK	Missing sidewalk	Construct new sidewalk - SINGING BROOK from SHADY BROOK LN to LAZY BROOK CR	4 - Low	5 - Very Low
4B - 283	HARRIS, BLANTON	MAPLELEAF DR	Missing sidewalk	Construct new sidewalk - MAPLELEAF DR from ROGGE LN to DELWOOD DR	2 - High	3 - Medium
4B - 284	BLANTON, HARRIS	DELWOOD DR	Missing sidewalk	Construct new sidewalk - DELWOOD DR from ROGGE LN to NORTHRIDGE DR	2 - High	4 - Low
4B - 285	HARRIS, BLANTON	RIDGEMONT DR	Missing sidewalk	Construct new sidewalk - RIDGEMONT DR from CAMERON RD to ROGGE LN	3 - Medium	5 - Very Low
4B - 286	BLANTON, HARRIS	CLOVERLEAF DR	Missing sidewalk	Construct new sidewalk - CLOVERLEAF DR from CAMERON RD to RIDGEMONT DR	4 - Low	5 - Very Low
4B - 287	HARRIS, BLANTON	CORONA DR	Missing sidewalk	Construct new sidewalk - CORONA DR from CAMERON RD to RIDGEMONT DR	2 - High	5 - Very Low
4B - 288	BLANTON	GREENBROOK PKWY	Missing sidewalk	Construct new sidewalk - GREENBROOK PKWY from WESTMINSTER DR to BERKMAN DR	2 - High	4 - Low
4B - 289	BROWN	NORTHCREST BLVD	Missing sidewalk	Construct new sidewalk - NORTHCREST BLVD from E ANDERSON LN SVRD EB to W ANDERSON LN SVRD WB	1 - Very High	1 - Very High
4B - 290	REILLY	BURNS ST	Missing sidewalk	Construct new sidewalk - BURNS ST from Near 6401 BURNS ST to DENSON DR	3 - Medium	3 - Medium

DRAFT

Estimated Cost: Benefit rankings are preliminary, planning level-estimates to identify cost-effective options for addressing safety concerns. Estimated Cost: Benefit rankings are developed using planning level costs for projects of this nature. Individual project cost estimates will change as projects advance. See pages 4-5 of this report for more information about how the Safe Routes Program determines project prioritization and implementation.

Project ID	Nearby School(s)	Location	Issue	Recommendation + = parking removal required * = curb changes required ~ = private property acquisition required	Benefit Category	Cost:Benefit Category
4B - 291	WEBB, BROWN, WEBB	EASTCREST DR	Missing sidewalk	Construct new sidewalk - EASTCREST DR from E ST JOHNS AVE to E CRESTLAND DR , Construct new sidewalk - EASTCREST DR from Near 7708 EASTCREST DR to PRINCE DR	2 - High	3 - Medium
4B - 292	BROWN	PRINCE DR	Missing sidewalk	Construct new sidewalk - PRINCE DR from EASTCREST DR to NORTHCREST BLVD	3 - Medium	2 - High
4B - 601	BROWN	GUADALUPE ST / W CRESTLAND DR	Non-compliant curb ramps	Replace existing curb ramp [4]	5 - Very Low	4 - Low
4B - 602	BROWN	BISSONET LN / PAXTON ST	Missing curb ramps	Add new curb ramp [2] , Install high visibility crosswalk [1] across Bissonet Ln	3 - Medium	1 - Very High
4B - 603	WEBB, WEBB	E ST JOHNS AVE / ROLAND JOHNSON DR	Missing curb ramps	Add new curb ramp [1]	1 - Very High	1 - Very High
4B - 604	BROWN	MORROW ST / PAXTON ST	Non-compliant curb ramps	Replace existing curb ramp [1]	5 - Very Low	4 - Low
4B - 606	HARRIS, BLANTON	ROGGE LN / WESTMINSTER DR	Faded crosswalk markings	Repaint crosswalk markings [1] across All legs	3 - Medium	2 - High
4B - 607	BROWN, WEBB, WEBB	NORTHCREST BLVD / W CROSLIN ST	Missing curb ramps	Add new curb ramp [4] , Install high visibility crosswalk [3] across W Croslin St and Northcrest Blvd , Install Rapid Flashing Beacon [1]	3 - Medium	2 - High
4B - 609	BROWN	GUADALUPE ST / MORROW ST	Faded crosswalk markings	Repaint crosswalk markings [1] across Guadalupe	5 - Very Low	4 - Low
4B - 610	WEBB, WEBB	E HUNTLAND DR / ROLAND JOHNSON DR	Non-compliant curb ramps	Install high visibility crosswalk [1] across Roland Johnson Dr , Replace existing curb ramp [2]	1 - Very High	1 - Very High
4B - 611	BROWN	GUADALUPE ST / W CROSLIN ST	Non-compliant curb ramps	Replace existing curb ramp [4]	5 - Very Low	4 - Low

DRAFT

Estimated Cost: Benefit rankings are preliminary, planning level-estimates to identify cost-effective options for addressing safety concerns. Estimated Cost: Benefit rankings are developed using planning level costs for projects of this nature. Individual project cost estimates will change as projects advance. See pages 4-5 of this report for more information about how the Safe Routes Program determines project prioritization and implementation.

Project ID	Nearby School(s)	Location	Issue	Recommendation + = parking removal required * = curb changes required ~ = private property acquisition required	Benefit Category	Cost:Benefit Category
4B - 612	WEBB, WEBB	NORTHCREST BLVD / W ST JOHNS AVE	Faded crosswalk markings	Add median refuge island on Saint John's Ave , Install high visibility crosswalk & Repaint crosswalk markings [2] across Saint Johns	1 - Very High	1 - Very High
4B - 613	BROWN	DELAFIELD LN / PRAIRIE DELL	Faded crosswalk markings, Missing curb ramps	Add new curb ramp [2] , Add signage , Install high visibility crosswalk [2] across Prairie Dell Ave and Delafield Ln ~ *	3 - Medium	2 - High
4B - 614	BROWN	AMESBURY LN / DELAFIELD LN / GUADALUPE ST	Non-compliant curb ramps	Replace existing curb ramp [4]	5 - Very Low	4 - Low
4B - 616	PICKLE	E ST JOHNS AVE / GRAND CANYON DR	Non-compliant curb ramps	Replace existing curb ramp [2]	3 - Medium	2 - High
4B - 617	WEBB, BROWN, WEBB	NORTHCREST BLVD / W CRESTLAND DR	Missing curb ramps, Non-compliant curb ramps	Add new curb ramp [2] , Replace existing curb ramp [2]	2 - High	1 - Very High
4B - 618	REILLY	AIRPORT BLVD / W HIGHLAND MALL BLVD	Faded crosswalk markings	Add median refuge island on south leg of Airport Blvd , Install high visibility crosswalk [3] across All legs of intersection	2 - High	1 - Very High
4B - 619	REILLY	AIRPORT BLVD / GUADALUPE ST	Faded crosswalk markings, High speed crossing, Long crossing distance	Add green cross bike markings , Consider protected intersection options *	2 - High	1 - Very High
4B - 620	BROWN	GUADALUPE ST / NORTHWAY DR	Missing curb ramps	Add new curb ramp [2]	2 - High	1 - Very High
4B - 621	WEBB, WEBB	BRENDA DR / E HUNTLAND DR	Difficult crossing, Missing curb ramps	Add new curb ramp [2] , Install high visibility crosswalk [1] across Brenda Dr	2 - High	1 - Very High

DRAFT

Estimated Cost: Benefit rankings are preliminary, planning level-estimates to identify cost-effective options for addressing safety concerns. Estimated Cost: Benefit rankings are developed using planning level costs for projects of this nature. Individual project cost estimates will change as projects advance. See pages 4-5 of this report for more information about how the Safe Routes Program determines project prioritization and implementation.

Project ID	Nearby School(s)	Location	Issue	Recommendation + = parking removal required * = curb changes required ~ = private property acquisition required	Benefit Category	Cost:Benefit Category
4B - 622	REILLY	GUADALUPE ST / WILMES DR	Difficult crossing, Missing curb ramps	Add median refuge island on Guadalupe St , Add new curb ramp [4] , Install high visibility crosswalk [3] across Wilmes Drive (x2) and Guadalupe St *	3 - Medium	2 - High
4B - 623	BLANTON	OAKLEAF CIR / WESTMINSTER DR	Difficult crossing	Add curb extensions [2] on Westminster Dr , Install high visibility crosswalk [1] across Westminster ~ *	1 - Very High	1 - Very High
4B - 624	REILLY	AVENUE G / E KOENIG LN	Difficult crossing, Non-compliant curb ramps	Install high visibility crosswalk [1] across Avenue G , Replace existing curb ramp [1] *	3 - Medium	2 - High
4B - 625	PICKLE	BOOKER AVE / PROVIDENCE AVE	Difficult crossing, Missing curb ramps	Add new curb ramp [3] , Install high visibility crosswalk [2] across Booker Ave and Providence Ave ~ *	1 - Very High	1 - Very High
4B - 626	PICKLE	BENNETT AVE / WHEATLEY AVE	Difficult crossing, Missing curb ramps	Add new curb ramp [2] , Install high visibility crosswalk [1] across Wheatley ~ *	2 - High	1 - Very High
4B - 627	REILLY	AVENUE C / CHESTERFIELD AVE	Difficult crossing, Missing curb ramps	Add new curb ramp [2] , Install high visibility crosswalk [1] across Ave C	4 - Low	3 - Medium
4B - 628	REILLY	GUADALUPE ST / IRMA DR	Difficult crossing, Missing curb ramps	Add median refuge island on Guadalupe St , Add new curb ramp [4] , Install high visibility crosswalk [3] across Irma Dr (x2) and Guadalupe St *	3 - Medium	2 - High
4B - 629	WEBB, WEBB	DELMAR AVE / N IH 35 SVRD SB	Difficult crossing, Missing curb ramps, Non-compliant curb ramps	Add new curb ramp [1] , Install high visibility crosswalk [1] across Delmar Ave , Replace existing curb ramp [1]	1 - Very High	1 - Very High
4B - 630	WEBB, WEBB	BLACKSON AVE / DUVAL ST	Difficult crossing, Missing curb ramps	Add median refuge island on Duval , Add new curb ramp [3] , Install high visibility crosswalk [2] across Duval Street and Blackson Ave ~ *	1 - Very High	1 - Very High

DRAFT

Estimated Cost: Benefit rankings are preliminary, planning level-estimates to identify cost-effective options for addressing safety concerns. Estimated Cost: Benefit rankings are developed using planning level costs for projects of this nature. Individual project cost estimates will change as projects advance. See pages 4-5 of this report for more information about how the Safe Routes Program determines project prioritization and implementation.

Project ID	Nearby School(s)	Location	Issue	Recommendation + = parking removal required * = curb changes required ~ = private property acquisition required	Benefit Category	Cost:Benefit Category
4B - 631	REILLY	AVENUE F / E SKYVIEW RD	Difficult crossing, Missing curb ramps	Add new curb ramp [2] , Install high visibility crosswalk [1] across Ave F	4 - Low	2 - High
4B - 632	WEBB, WEBB, REILLY	ESTHER DR / ISABELLE DR	Difficult crossing, Missing curb ramps	Add new curb ramp [2] , Install high visibility crosswalk [1] across Esther Dr	3 - Medium	2 - High
4B - 633	PICKLE	E ST JOHNS AVE / PROVIDENCE AVE	Difficult crossing, Missing curb ramps, No pedestrian signals	Add lighting , Install high visibility crosswalk [1] across St Johns , Install Rapid Flashing Beacon , Replace existing curb ramp [2]	1 - Very High	1 - Very High
4B - 634	PICKLE	BETHUNE AVE / BLACKSON AVE	Difficult crossing, Missing curb ramps, Non-compliant curb ramps	Add median refuge island on Blackson Ave , Add new curb ramp [2] , Install high visibility crosswalk [2] across Bethune Ave and Blackson Ave , Replace existing curb ramp [1]	2 - High	1 - Very High
4B - 635	PICKLE	PROVIDENCE AVE / WILKS AVE	Difficult crossing, Missing curb ramps	Add new curb ramp [1] , Add signage for crossing of Providence Ave , Install high visibility crosswalk [2] across Wilks Ave and Providence Ave	2 - High	1 - Very High
4B - 636	REILLY	AVENUE G / E SKYVIEW RD	Difficult crossing, Missing curb ramps	Add new curb ramp [2] , Install high visibility crosswalk [1] across Ave G	4 - Low	3 - Medium
4B - 637	PICKLE	GRAND CANYON DR / RADCLIFF DR	Difficult crossing, Missing curb ramps	Add new curb ramp [2] , Install high visibility crosswalk [1] across Radcliff Dr	1 - Very High	1 - Very High
4B - 638	REILLY, WEBB, WEBB	ISABELLE DR / MIRANDA DR / PAMPA DR	Difficult crossing, Missing curb ramps	Add new curb ramp [3] , Install high visibility crosswalk [2] across Miranda Dr and Isabelle Dr	3 - Medium	2 - High

DRAFT

Estimated Cost: Benefit rankings are preliminary, planning level-estimates to identify cost-effective options for addressing safety concerns. Estimated Cost: Benefit rankings are developed using planning level costs for projects of this nature. Individual project cost estimates will change as projects advance. See pages 4-5 of this report for more information about how the Safe Routes Program determines project prioritization and implementation.

Project ID	Nearby School(s)	Location	Issue	Recommendation + = parking removal required * = curb changes required ~ = private property acquisition required	Benefit Category	Cost:Benefit Category
4B - 639	WEBB, WEBB	BENNETT AVE / BOOKER AVE	Difficult crossing, Missing curb ramps	Add new curb ramp [2] , Install high visibility crosswalk [1] across Booker Ave ~ + *	2 - High	1 - Very High
4B - 640	WEBB, WEBB	E LISA DR / PRISCILLA DR	Difficult crossing, Missing curb ramps	Add new curb ramp [2] , Install high visibility crosswalk [1] across Priscilla	2 - High	1 - Very High
4B - 641	PICKLE	BETHUNE AVE / WHEATLEY AVE	Difficult crossing, Missing curb ramps	Add new curb ramp [2] , Add signage for crossing on Wheatley Ave , Install high visibility crosswalk [2] across Wheatley Ave & Bethune Ave ~ *	2 - High	1 - Very High
4B - 642	PICKLE	BOOKER AVE / MEADOR AVE	Difficult crossing, Missing curb ramps, Non-compliant curb ramps	Add new curb ramp [1] , Add signage for crossing of Meador Ave , Install high visibility crosswalk [2] across Booker Ave and Meador Ave , Replace existing curb ramp [2] ~ *	3 - Medium	1 - Very High
4B - 643	REILLY	E SKYVIEW RD / LINK AVE / W SKYVIEW RD	Difficult crossing, Missing curb ramps	Add new curb ramp [2] , Install high visibility crosswalk [1] across Link Ave	3 - Medium	2 - High
4B - 645	PICKLE	BLESSING AVE / E ST JOHNS AVE	Difficult crossing, Non-compliant curb ramps	Install Pedestrian Hybrid Beacon [1] , Replace existing curb ramp [4] *	1 - Very High	1 - Very High
4B - 646	WEBB, WEBB	E LISA DR / MIRANDA DR / W LISA DR	Difficult crossing, Missing curb ramps	Add new curb ramp [2] , Install high visibility crosswalk [1] across Miranda Dr	3 - Medium	2 - High
4B - 647	BROWN	MEADOWVIEW LN / PRAIRIE DELL	Difficult crossing, Missing curb ramps	Add new curb ramp [4] , Add signage , Install high visibility crosswalk [3] across east crossing of Meadowview Ln & Prairie Dell Ave ~ *	3 - Medium	2 - High

DRAFT

Estimated Cost: Benefit rankings are preliminary, planning level-estimates to identify cost-effective options for addressing safety concerns. Estimated Cost: Benefit rankings are developed using planning level costs for projects of this nature. Individual project cost estimates will change as projects advance. See pages 4-5 of this report for more information about how the Safe Routes Program determines project prioritization and implementation.

Project ID	Nearby School(s)	Location	Issue	Recommendation + = parking removal required * = curb changes required ~ = private property acquisition required	Benefit Category	Cost:Benefit Category
4B - 648	PICKLE	BLESSING AVE / WHEATLEY AVE	Difficult crossing, Missing curb ramps	Add curb extensions [2] on Blessing Ave , Add new curb ramp [2] , Add signage , Replace existing curb ramp [1] + *	1 - Very High	1 - Very High
4B - 649	WEBB, WEBB	E CROSLIN ST / TWIN CREST DR	Difficult crossing, Missing curb ramps	Add new curb ramp [2] , Install high visibility crosswalk [1] across Twin Crest Drive	2 - High	1 - Very High
4B - 650	WEBB, WEBB	BLACKSON AVE / N IH 35 SVRD NB	Difficult crossing	Install high visibility crosswalk [1] across Blackson Ave	1 - Very High	1 - Very High
4B - 651	REILLY	CHESTERFIELD AVE / W SKYVIEW RD	Difficult crossing, Missing curb ramps	Add new curb ramp [3] , Install high visibility crosswalk [2] across Chesterfield Ave and W Skyview Rd	3 - Medium	2 - High
4B - 652	WEBB, WEBB	DEBORAH DR / E LISA DR	Difficult crossing, Missing curb ramps	Add new curb ramp [2] , Install raised crosswalk [1] across Deborah	2 - High	1 - Very High
4B - 654	BROWN	BISSONET LN / CRESTON LN / GUADALUPE ST	Difficult crossing	Install high visibility crosswalk [1] across Guadalupe , Install Rapid Flashing Beacon , Replace existing curb ramp [4]	3 - Medium	2 - High
4B - 655	REILLY	GAYLOR ST / GUADALUPE ST	Difficult crossing, Missing curb ramps	Add median refuge island on Guadalupe St , Add new curb ramp [3] , Install high visibility crosswalk [3] across Gaylor Street (x2) & Guadelupe Street (x1) , Install Rapid Flashing Beacon *	3 - Medium	3 - Medium
4B - 656	PICKLE	BLESSING AVE / WILKS AVE	Difficult crossing, Missing curb ramps	Add new curb ramp [1] , Add signage for crossing of Blessing Ave , Install high visibility crosswalk [2] across Wilks Ave and Blessing Ave	1 - Very High	1 - Very High

DRAFT

Estimated Cost: Benefit rankings are preliminary, planning level-estimates to identify cost-effective options for addressing safety concerns. Estimated Cost: Benefit rankings are developed using planning level costs for projects of this nature. Individual project cost estimates will change as projects advance. See pages 4-5 of this report for more information about how the Safe Routes Program determines project prioritization and implementation.

Project ID	Nearby School(s)	Location	Issue	Recommendation + = parking removal required * = curb changes required ~ = private property acquisition required	Benefit Category	Cost:Benefit Category
4B - 657	WEBB, WEBB, PICKLE	BENNETT AVE / BLACKSON AVE	Difficult crossing, Missing curb ramps, Non-compliant curb ramps	Add median refuge island on Blackson Ave , Add new curb ramp [3] , Install high visibility crosswalk [2] across Blackson Ave and Bennet Ave , Replace existing curb ramp [1] *	2 - High	1 - Very High
4B - 658	WEBB, WEBB	ISABELLE DR / KENNISTON DR / RUFUS DR	Difficult crossing, Missing curb ramps	Add new curb ramp [3] , Install high visibility crosswalk [2] across Isabell Dr and Rufus Dr *	3 - Medium	2 - High
4B - 659	WEBB, WEBB	E ST JOHNS AVE / N IH 35 SVRD SB	Difficult crossing, Missing curb ramps	Add new curb ramp [4] , Improve signal responsiveness to pedestrian push buttons , Install high visibility crosswalk [4] across I35 and Saint Johns , Tighten curb radii [4]	1 - Very High	1 - Very High
4B - 660	PICKLE	BLESSING AVE / BOOKER AVE	Difficult crossing, Missing curb ramps	Add new curb ramp [1] , Install high visibility crosswalk [1] across Booker Ave *	2 - High	1 - Very High
4B - 661	REILLY	AVENUE F / E KOENIG LN	Difficult crossing, Non-compliant curb ramps	Add Leading Pedestrian Interval (LPI) , Install high visibility crosswalk [3] across Koenig Ln & Avenue F , Replace existing curb ramp [1] *	3 - Medium	2 - High
4B - 662	WEBB, WEBB	DELMAR AVE / DUVAL ST	Difficult crossing, Missing curb ramps	Add new curb ramp [3] , Install high visibility crosswalk [2] across Delmar and Duvall ~ *	1 - Very High	1 - Very High
4B - 663	WEBB, WEBB	NORTHCREST BLVD / W O DELL ST	Difficult crossing, Missing curb ramps, Non-compliant curb ramps	Add new curb ramp [2] , Install high visibility crosswalk [3] across Northcrest Blvd and W Odell St , Install Rapid Flashing Beacon [1] , Replace existing curb ramp [2]	3 - Medium	2 - High

DRAFT

Estimated Cost: Benefit rankings are preliminary, planning level-estimates to identify cost-effective options for addressing safety concerns. Estimated Cost: Benefit rankings are developed using planning level costs for projects of this nature. Individual project cost estimates will change as projects advance. See pages 4-5 of this report for more information about how the Safe Routes Program determines project prioritization and implementation.

Project ID	Nearby School(s)	Location	Issue	Recommendation + = parking removal required * = curb changes required ~ = private property acquisition required	Benefit Category	Cost:Benefit Category
4B - 664	WEBB, WEBB	RUFUS DR / W LISA DR	Difficult crossing, Missing curb ramps	Add new curb ramp [2] , Install high visibility crosswalk [1] across Rufus	3 - Medium	2 - High
4B - 665	PICKLE	CAMERON RD / FAIRBANKS DR	Difficult crossing, Missing curb ramps	Add new curb ramp [2] , Install high visibility crosswalk [1] across Fairbanks Dr	1 - Very High	1 - Very High
4B - 666	PICKLE	FAIRBANKS DR / IRVING LN	Difficult crossing, Missing curb ramps	Add new curb ramp [2] , Install high visibility crosswalk [1] across Irving Ln	2 - High	1 - Very High
4B - 667	REILLY	BRENTWOOD ST / GUADALUPE ST	Difficult crossing, Missing curb ramps	Add median refuge island on Guadalupe St , Add new curb ramp [4] , Install high visibility crosswalk [3] across Brentwood St (x2) and Guadalupe St *	3 - Medium	3 - Medium
4B - 668	WEBB, WEBB	BRENDA DR / MIRANDA DR	Difficult crossing, Missing curb ramps	Add new curb ramp [2] , Install high visibility crosswalk [1] across Miranda Dr *	3 - Medium	1 - Very High
4B - 669	REILLY	AVENUE D / W KOENIG LN	Difficult crossing, Non-compliant curb ramps	Install high visibility crosswalk [1] across Avenue D , Replace existing curb ramp [1] *	3 - Medium	2 - High
4B - 670	REILLY	AVENUE C / W KOENIG LN	Difficult crossing, Non-compliant curb ramps	Install high visibility crosswalk [1] across Avenue C , Replace existing curb ramp [1] *	3 - Medium	2 - High
4B - 671	REILLY	E KOENIG LN / LINK AVE / W KOENIG LN	Difficult crossing, Non-compliant curb ramps	Install high visibility crosswalk [1] across Link Ave , Replace existing curb ramp [1] *	3 - Medium	2 - High
4B - 672	PICKLE	CAMERON RD / RADCLIFF DR	Difficult crossing, Non-compliant curb ramps	Install high visibility crosswalk [1] across Radcliff Dr , Replace existing curb ramp [2]	1 - Very High	1 - Very High

DRAFT

Estimated Cost: Benefit rankings are preliminary, planning level-estimates to identify cost-effective options for addressing safety concerns. Estimated Cost: Benefit rankings are developed using planning level costs for projects of this nature. Individual project cost estimates will change as projects advance. See pages 4-5 of this report for more information about how the Safe Routes Program determines project prioritization and implementation.

Project ID	Nearby School(s)	Location	Issue	Recommendation + = parking removal required * = curb changes required ~ = private property acquisition required	Benefit Category	Cost:Benefit Category
4B - 673	BROWN	NORTHCREST BLVD / PRAIRIE DELL	Difficult crossing	Add median refuge island on Northcrest Blvd , Add new curb ramp [2] , Install high visibility crosswalk [2] across Northcrest and Prairie Dell	3 - Medium	2 - High
4B - 674	REILLY	GUADALUPE ST / HAMMACK DR	Difficult crossing, Missing curb ramps	Add median refuge island on Guadalupe St , Add new curb ramp [4] , Install high visibility crosswalk [3] across Hammack Drive (x2) and Guadalupe St *	3 - Medium	2 - High
4B - 675	PICKLE	BLACKSON AVE / PROVIDENCE AVE	Difficult crossing, Missing curb ramps	Add new curb ramp [3] , Add signage for crossing of Providence Ave , Install high visibility crosswalk [2] across north leg of Providence Ave & east leg of Blackson Ave	2 - High	1 - Very High
4B - 676	PICKLE	CARVER AVE / WHEATLEY AVE	Difficult crossing, Missing curb ramps	Add new curb ramp [4] , Add signage for crossing of Wheatley Ave , Install high visibility crosswalk [2] across Wheatley Ave and Carver Ave ~ *	2 - High	1 - Very High
4B - 677	WEBB, WEBB	BRENDA DR / ESTHER DR / PRISCILLA DR	Difficult crossing, Missing curb ramps	Add new curb ramp [3] , Install high visibility crosswalk [2] across Pricilla Dr and Brenda Dr *	3 - Medium	1 - Very High
4B - 678	REILLY	AVENUE D / CHESTERFIELD AVE	Difficult crossing, Missing curb ramps	Add new curb ramp [2] , Install high visibility crosswalk [1] across Ave D	4 - Low	2 - High
4B - 679	BLANTON	BLANTON DR / ROGGE LN	Difficult crossing	Add median refuge island on Rogge Ln , Install high visibility crosswalk [2] across east leg of Rogge Ln & Blanton Dr ~	1 - Very High	1 - Very High
4B - 680	WEBB, WEBB	DUVAL ST / E ST JOHNS AVE	Difficult crossing	Add curb extensions [2] on Duval St , Install high visibility crosswalk [1] across Duvall *	1 - Very High	1 - Very High

DRAFT

Estimated Cost: Benefit rankings are preliminary, planning level-estimates to identify cost-effective options for addressing safety concerns. Estimated Cost: Benefit rankings are developed using planning level costs for projects of this nature. Individual project cost estimates will change as projects advance. See pages 4-5 of this report for more information about how the Safe Routes Program determines project prioritization and implementation.

Project ID	Nearby School(s)	Location	Issue	Recommendation + = parking removal required * = curb changes required ~ = private property acquisition required	Benefit Category	Cost:Benefit Category
4B - 681	BLANTON	BLANTON DR / GREENBROOK PKWY	Difficult crossing, Missing curb ramps, Non-compliant curb ramps	Add new curb ramp [1] , Install high visibility crosswalk [1] across Blanton Dr , Replace existing curb ramp [1]	2 - High	1 - Very High
4B - 682	PICKLE	BETHUNE AVE / BOOKER AVE	Difficult crossing, Missing curb ramps, Non-compliant curb ramps	Add new curb ramp [1] , Add signage for crossing of Bethune Ave , Install high visibility crosswalk [2] across Bethune Ave and Booker Ave , Replace existing curb ramp [2] *	3 - Medium	1 - Very High
4B - 683	WEBB, WEBB, BROWN	CINDERELLA DR / NORTHCREST BLVD	Difficult crossing	Install high visibility crosswalk [1] across Cinderella	2 - High	1 - Very High
4B - 684	WEBB, WEBB, PICKLE	BOOKER AVE / CARVER AVE	Difficult crossing, Missing curb ramps, Non-compliant curb ramps	Add new curb ramp [1] , Add signage for crossing of Carver Ave , Install high visibility crosswalk [2] across Booker Ave and Carver Ave , Replace existing curb ramp [2] *	2 - High	1 - Very High
4B - 685	WEBB, WEBB	E ST JOHNS AVE / TWIN CREST DR	Difficult crossing, Non-compliant curb ramps	Install high visibility crosswalk [1] across Twin Crest Dr , Replace existing curb ramp [2]	1 - Very High	1 - Very High
4B - 686	WEBB, WEBB	ISABELLE DR / SWANEE DR	Difficult crossing, Missing curb ramps	Add new curb ramp [2] , Install high visibility crosswalk [1] across Isabelle Dr	3 - Medium	2 - High
4B - 687	REILLY	ISABELLE DR / W HUNTLAND DR	Difficult crossing	Install high visibility crosswalk [1] across Isabelle Dr	2 - High	1 - Very High
4B - 688	REILLY	DENSON DR / GUADALUPE ST	Difficult crossing	Add Leading Pedestrian Interval (LPI)	5 - Very Low	3 - Medium
4B - 689	BROWN	MARCELL ST / W CRESTLAND DR	Difficult crossing, Missing curb ramps	Add new curb ramp [2] , Install high visibility crosswalk [1] across Marcell St ~	4 - Low	2 - High

DRAFT

Estimated Cost: Benefit rankings are preliminary, planning level-estimates to identify cost-effective options for addressing safety concerns. Estimated Cost: Benefit rankings are developed using planning level costs for projects of this nature. Individual project cost estimates will change as projects advance. See pages 4-5 of this report for more information about how the Safe Routes Program determines project prioritization and implementation.

Project ID	Nearby School(s)	Location	Issue	Recommendation + = parking removal required * = curb changes required ~ = private property acquisition required	Benefit Category	Cost:Benefit Category
4B - 691	HARRIS, BLANTON	BERKMAN DR	Wide curb radii	Add new curb ramp [2] , Install high visibility crosswalk [1] across Berkman Drive , Install Rapid Flashing Beacon *	4 - Low	3 - Medium
4B - 693	PICKLE	Midblock - MEADOR AVE	High speed crossing, Missing curb ramps, Poor sightlines	Add curb extensions [1] on Midblock at Wheatley in front of school entrance , Add new curb ramp [1] , Install high visibility crosswalk [1] across Wheatley ~ + *	1 - Very High	1 - Very High
4B - 698	BROWN	CRESTON LN / NORTHWAY DR	Difficult crossing, High speed crossing, Missing curb ramps, need crossing into TA Brown park that will lead to school	Add curb extensions [2] on Northway Dr , Add new curb ramp [2] , Install raised crosswalk [1] across Northway Drive + *	2 - High	2 - High
4B - 700	BLANTON	RIDGEMONT DR / ROGGE LN	Difficult crossing	Add median refuge island on Rogge Ln	2 - High	1 - Very High
4B - 702	BROWN	E ANDERSON LN SVRD EB / NORTHCREST BLVD / W ANDERSON LN SVRD EB	Difficult crossing	Add Leading Pedestrian Interval (LPI) , Add lighting and placemaking elements , Improve signal responsiveness to pedestrian push button , Install high visibility crosswalk [3] across Georgian Dr , Tighten curb radii [2] *	1 - Very High	1 - Very High

DRAFT

Estimated Cost: Benefit rankings are preliminary, planning level-estimates to identify cost-effective options for addressing safety concerns. Estimated Cost: Benefit rankings are developed using planning level costs for projects of this nature. Individual project cost estimates will change as projects advance. See pages 4-5 of this report for more information about how the Safe Routes Program determines project prioritization and implementation.

Project ID	Nearby School(s)	Location	Issue	Recommendation + = parking removal required * = curb changes required ~ = private property acquisition required	Benefit Category	Cost:Benefit Category
4B - 703	BROWN	Midblock - N LAMAR BLVD SB	Difficult crossing	Add Leading Pedestrian Interval (LPI) , Add lighting and placemaking elements, add concrete pork chop island on northeast corner , Increase responsiveness to pedestrian push button , Install high visibility crosswalk [8] across Anderson Ln & Lamar Blvd & Research Blvd , Tighten curb radii [4] *	2 - High	2 - High
4B - 704	BROWN	DELAFIELD LN / NORTHWAY DR	Difficult crossing	Add median refuge island on Northway Dr , Replace existing curb ramp [4] , Tighten curb radii [4] *	3 - Medium	3 - Medium
4B - 705	PICKLE	PROVIDENCE AVE / WHEATLEY AVE	Difficult crossing	Add curb extensions [3] on Providence Ave & Wheatley Ave , Remove crosswalks on west leg of Wheatley Ave and north leg of Providence Ave	1 - Very High	1 - Very High
4B - 706	REILLY	CHESTERFIELD AVE / W KOENIG LN	Difficult crossing	Install Pedestrian Hybrid Beacon [1]	3 - Medium	3 - Medium
4B - 707	REILLY	AIRPORT BLVD / W HUNTLAND DR	Difficult crossing	Add new curb ramp [1] , Install Pedestrian Hybrid Beacon [1] *	2 - High	2 - High
4B - 708	REILLY	CHESTERFIELD AVE / DENSON DR	Difficult crossing	Add median refuge island on Denson Dr , Install high visibility crosswalk [1] across Denson Dr	2 - High	1 - Very High
4B - 709	REILLY	GUADALUPE ST / W KOENIG LN	Difficult crossing	Add Leading Pedestrian Interval (LPI) , Install high visibility crosswalk [4] across Guadalupe St & Koenig Ln	3 - Medium	1 - Very High
4B - 710	WEBB, WEBB	E ST JOHNS AVE	Difficult crossing	Add median refuge island on St John's Ave , Install Pedestrian Hybrid Beacon [1]	1 - Very High	1 - Very High

DRAFT

Estimated Cost: Benefit rankings are preliminary, planning level-estimates to identify cost-effective options for addressing safety concerns. Estimated Cost: Benefit rankings are developed using planning level costs for projects of this nature. Individual project cost estimates will change as projects advance. See pages 4-5 of this report for more information about how the Safe Routes Program determines project prioritization and implementation.

Project ID	Nearby School(s)	Location	Issue	Recommendation + = parking removal required * = curb changes required ~ = private property acquisition required	Benefit Category	Cost:Benefit Category
4B - 711	WEBB, WEBB	E ST JOHNS AVE / N IH 35 SVRD NB	Difficult crossing	Improve signal responsiveness to pedestrian push buttons , Install high visibility crosswalk [4] across I35 and Saint Johns , Tighten curb radii [4]	1 - Very High	1 - Very High
4B - 712	PICKLE	BETHUNE AVE / E ST JOHNS AVE	Difficult crossing	Add median refuge island on St John's Ave	1 - Very High	1 - Very High
4B - 901	WEBB, WEBB	Near 303 SWANEE DR	No trail connection	Construct new shared use path	3 - Medium	2 - High
4B - 902	BLANTON	Near 2001 SINGING BROOK	No trail connection	Construct new shared use path	4 - Low	5 - Very Low
4B - 904	REILLY	Near 304 SKYVIEW RD	No trail connection	Construct new shared use path	3 - Medium	4 - Low
4B - 905	WEBB, WEBB	Near 6836 35 SVRD	No trail connection	Construct over/underpass	1 - Very High	5 - Very Low
4B - 906	BROWN, WEBB, WEBB	Near 7583 CHEVY CHASE DR	No trail connection	Construct new shared use path	1 - Very High	3 - Medium
4B - 907	PICKLE	Near 7400 PROVIDENCE AVE	No trail connection	Construct new shared use path	1 - Very High	2 - High

DRAFT

Estimated Cost: Benefit rankings are preliminary, planning level-estimates to identify cost-effective options for addressing safety concerns. Estimated Cost: Benefit rankings are developed using planning level costs for projects of this nature. Individual project cost estimates will change as projects advance. See pages 4-5 of this report for more information about how the Safe Routes Program determines project prioritization and implementation.

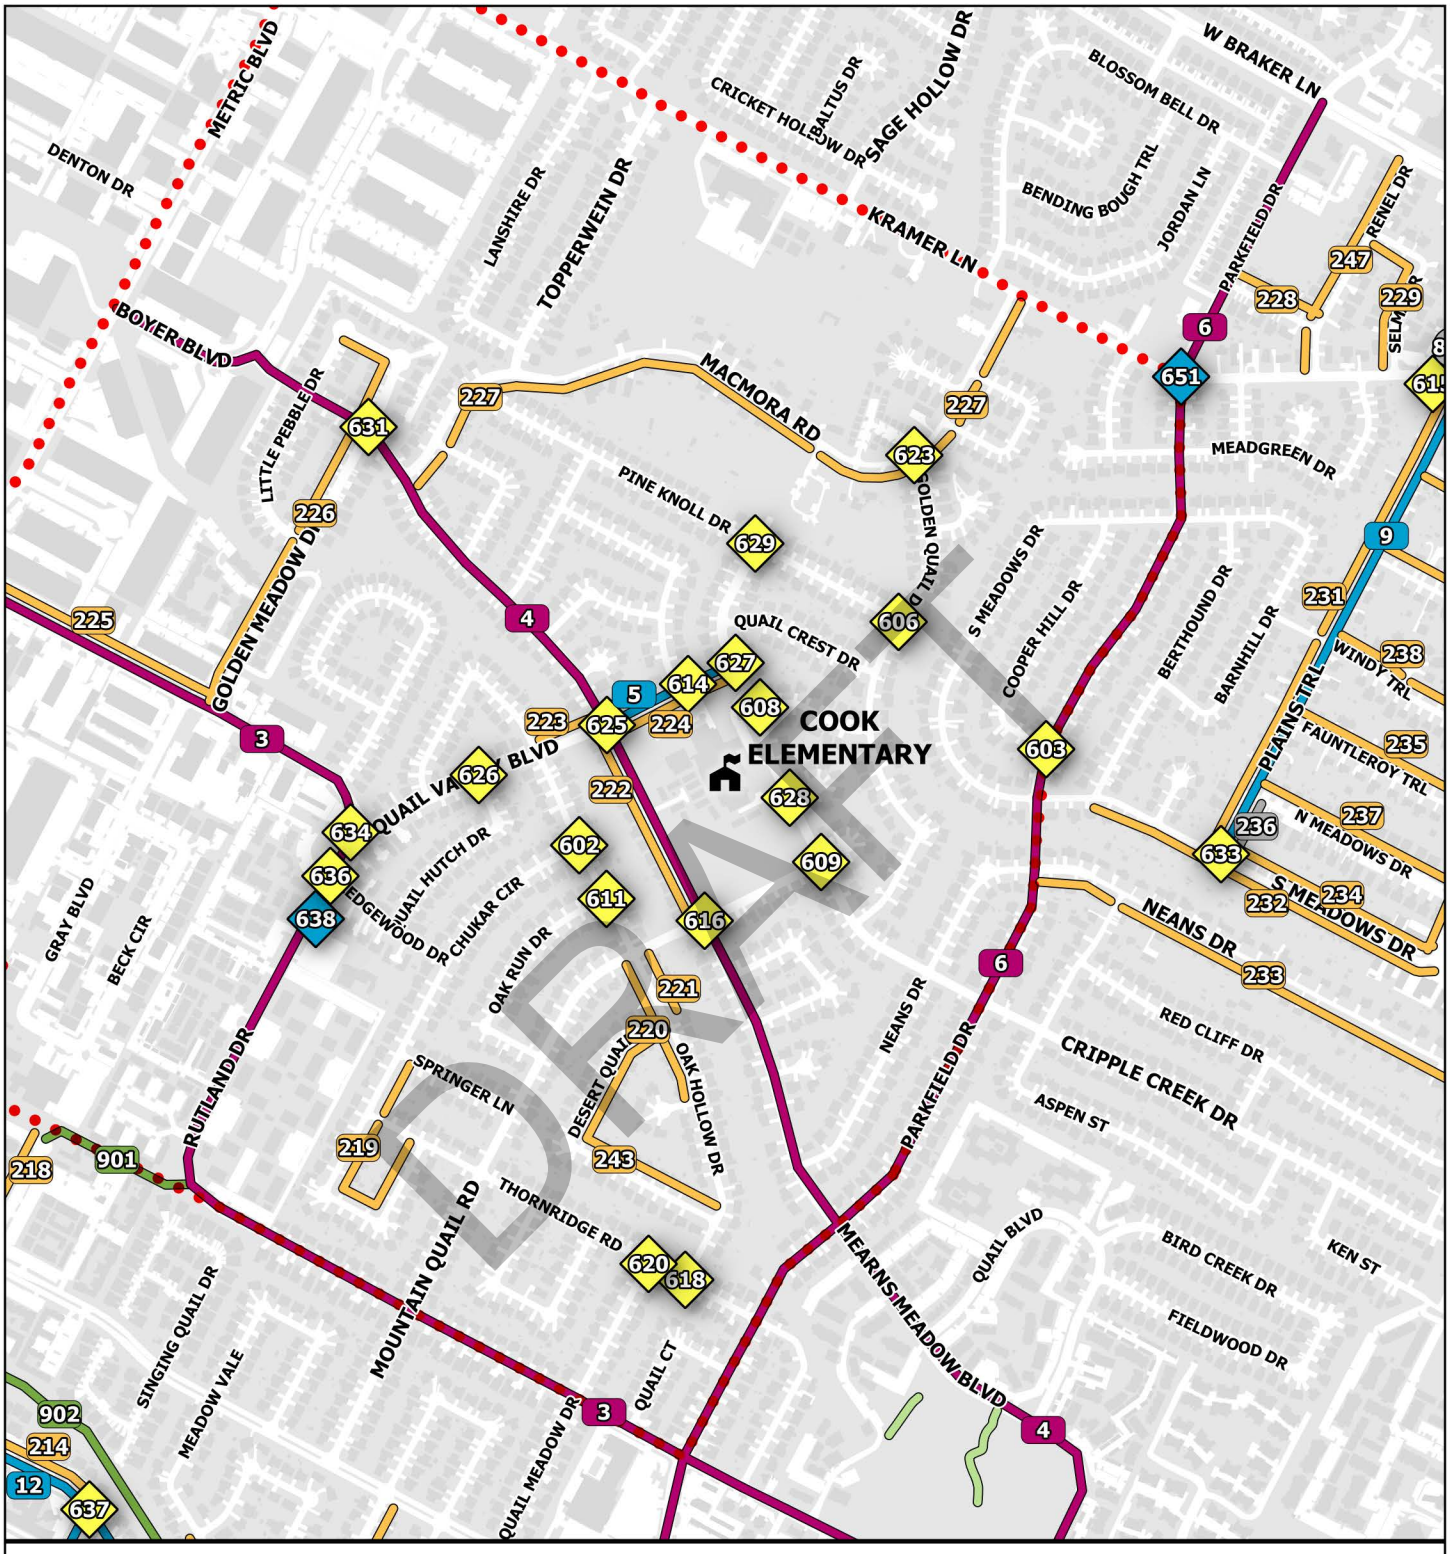
COOK ELEMENTARY
DRAFT
METRIC BLVD
DENTON DR
BOYER BLVD
LITTLE PEBBLE DR
GOLDEN MEADOW DR
LANSHIRE DR
TOPPERWEIN DR
CRICKET HOLLOW DR
BALTUS DR
SAGE HOLLOW DR
KRAMER LN
BLOSSOM BELL DR
BENDING BOUGH TRL
JORDAN LN
W BRAKER LN
PARKFIELD DR
RENEL DR
SELMA DR
MACMORA RD
PINE KNOLL DR
GOLDEN QUAIL DR
MEADGREEN DR
S MEADOWS DR
COOPER HILL DR
BERTHOUND DR
BARNHILL DR
WINDY TRL
PLAINS TRL
FAUNTLEROY TRL
N MEADOWS DR
S MEADOWS DR
NEANS DR
RED CLIFF DR
CRIPPLE CREEK DR
ASPEN ST
BIRD CREEK DR
KEN ST
FIELDWOOD DR
QUAIL CREST DR
QUAIL VALLEY BLVD
QUAIL HUTCH DR
EDGEWOOD DR
CHUKAR CIR
OAK RUN DR
OAK HOLLOW DR
DESERT QUAIL
SPRINGER LN
RUTLAND DR
MOUNTAIN QUAIL RD
THORNRIDGE RD
SINGING QUAIL DR
MEADOW VALE
QUAIL MEADOW DR
QUAIL CT
QUAIL BLVD
MEARNS MEADOW BLVD
GRAY BLVD
BECK CIR
225
226
227
228
229
231
232
233
234
235
236
237
238
247
218
219
220
221
222
223
224
243
901
902
214
12
637
618
620
602
609
611
616
627
614
608
625
628
606
603
623
629
631
626
634
636
638
633
651
615
3
4
5
6
9
Off-Street Trail
Bike Lane / Buffered Bike Lane / Protected Bike Lane
Sidepath
Neighborhood Bikeway / Traffic Calming
New / Improved Sidewalk
Other linear recommendation
Traffic Control / Intersection Reconfiguration
Ramp / Curb Extension / Crosswalk
Over / Underpass
Other Spot Recommendation
Existing Trail
School Boundary
CITY OF AUSTIN
FOUNDED 1839
CITY OF AUSTIN PUBLIC WORKS
SAFE ROUTES TO SCHOOL
austin MOTION
2016 MOBILITY BOND
TOOLE DESIGN
0
800
1600
2400 ft
N

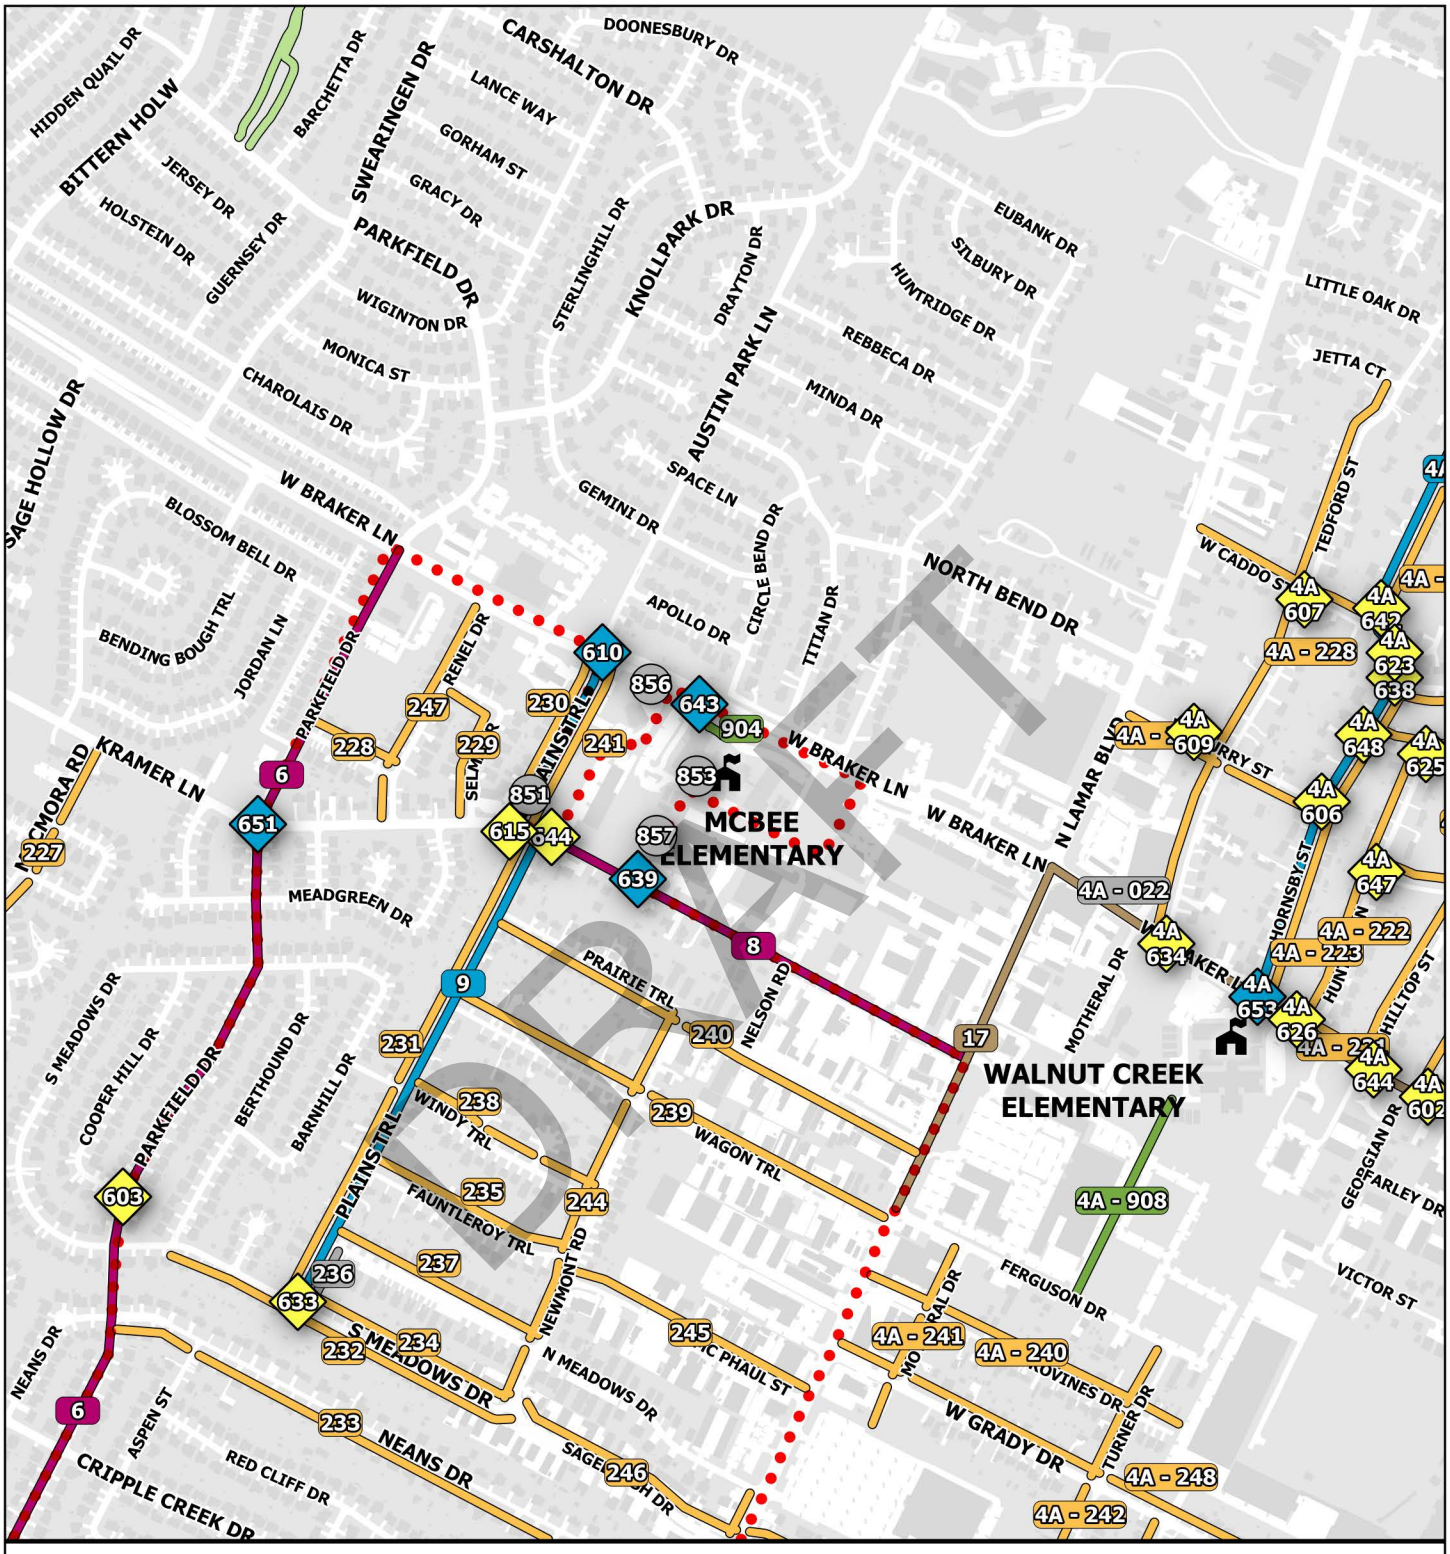
MCBEE ELEMENTARY
WALNUT CREEK ELEMENTARY
DRAFT
W BRAKER LN
KRAMER LN
NORTH BEND DR
AUSTIN PARK LN
KNOLLPARK DR
PARKFIELD DR
SWEARINGEN DR
CARSHALTON DR
DOONESBURY DR
N LAMAR BLVD
MEADGREEN DR
PRAIRIE TRL
PLAINS TRL
WINDY TRL
WAGON TRL
FAUNTLEROY TRL
NEWMONT RD
NELSON RD
MOTHERAL DR
FERGUSON DR
S MEADOWS DR
N MEADOWS DR
NEANS DR
W GRADY DR
CRIPPLE CREEK DR
RED CLIFF DR
ASPEN ST
TURNER DR
HORNSBY ST
TEDFORD ST
LITTLE OAK DR
JETTA CT
EUBANK DR
SILBURY DR
HUNTRIDGE DR
REBBECA DR
MINDA DR
SPACE LN
GEMINI DR
APOLLO DR
CIRCLE BEND DR
TITIAN DR
DRAYTON DR
STERLINGHILL DR
LANCE WAY
GORHAM ST
GRACY DR
WIGINTON DR
MONICA ST
CHAROLAIS DR
BLOSSOM BELL DR
BENDING BOUGH TRL
JORDAN LN
SAGE HOLLOW DR
HIDDEN QUAIL DR
BITTERN HOLW
JERSEY DR
HOLSTEIN DR
GUERNSEY DR
BARCHETTA DR
RENEL DR
SELMA DR
COOPER HILL DR
BERTHOUND DR
BARNHILL DR
GEORGIAN DR
FARLEY DR
VICTOR ST
HILLTOP ST
4A - 022
4A - 222
4A - 223
4A - 228
4A - 908
4A - 241
4A - 240
4A - 242
4A - 248
610
856
643
904
853
851
615
844
857
639
8
9
17
6
651
227
247
228
229
230
241
231
240
238
239
235
244
236
237
633
234
232
245
233
246
603
607
642
623
638
609
648
625
606
647
634
653
626
644
602
Off-Street Trail
Bike Lane / Buffered Bike Lane / Protected Bike Lane
Sidepath
Neighborhood Bikeway / Traffic Calming
New / Improved Sidewalk
Other linear recommendation
Traffic Control / Intersection Reconfiguration
Ramp / Curb Extension / Crosswalk
Over / Underpass
Other Spot Recommendation
Existing Trail
School Boundary
0
800
1600
2400 ft

SCHOOL GROUP 4C

PADRON ELEMENTARY

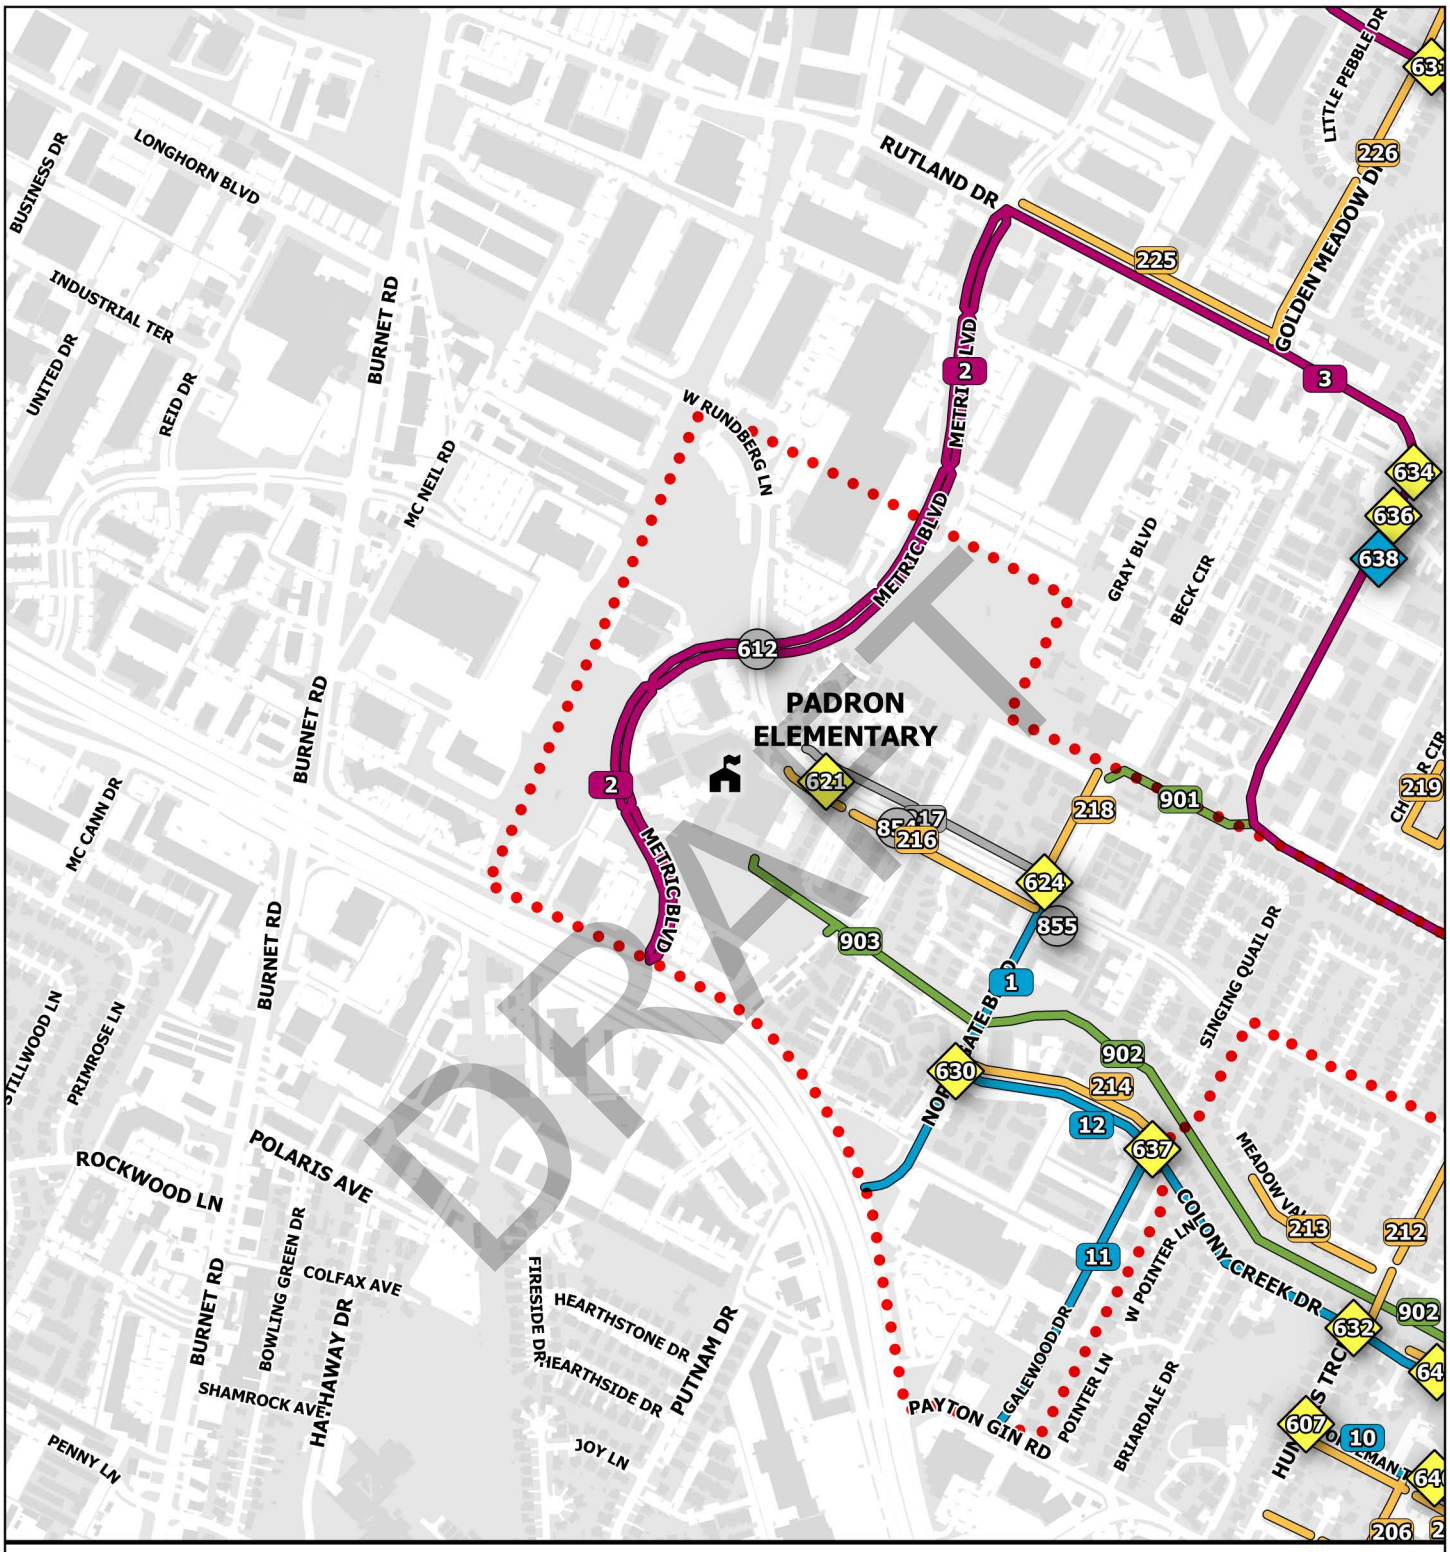

CITY OF AUSTIN — FOUNDED 1839

CITY OF AUSTIN PUBLIC WORKS — SAFE ROUTES TO SCHOOL

austin MOTION — IN OUR MOBILITY BOND

TOOLE DESIGN

0 800 1600 2400 ft

- Off-Street Trail
- Bike Lane / Buffered Bike Lane / Protected Bike Lane
- Sidepath
- Neighborhood Bikeway / Traffic Calming
- New / Improved Sidewalk
- Other linear recommendation
- Traffic Control / Intersection Reconfiguration
- Ramp / Curb Extension / Crosswalk
- Over / Underpass
- Other Spot Recommendation
- Existing Trail
- School Boundary

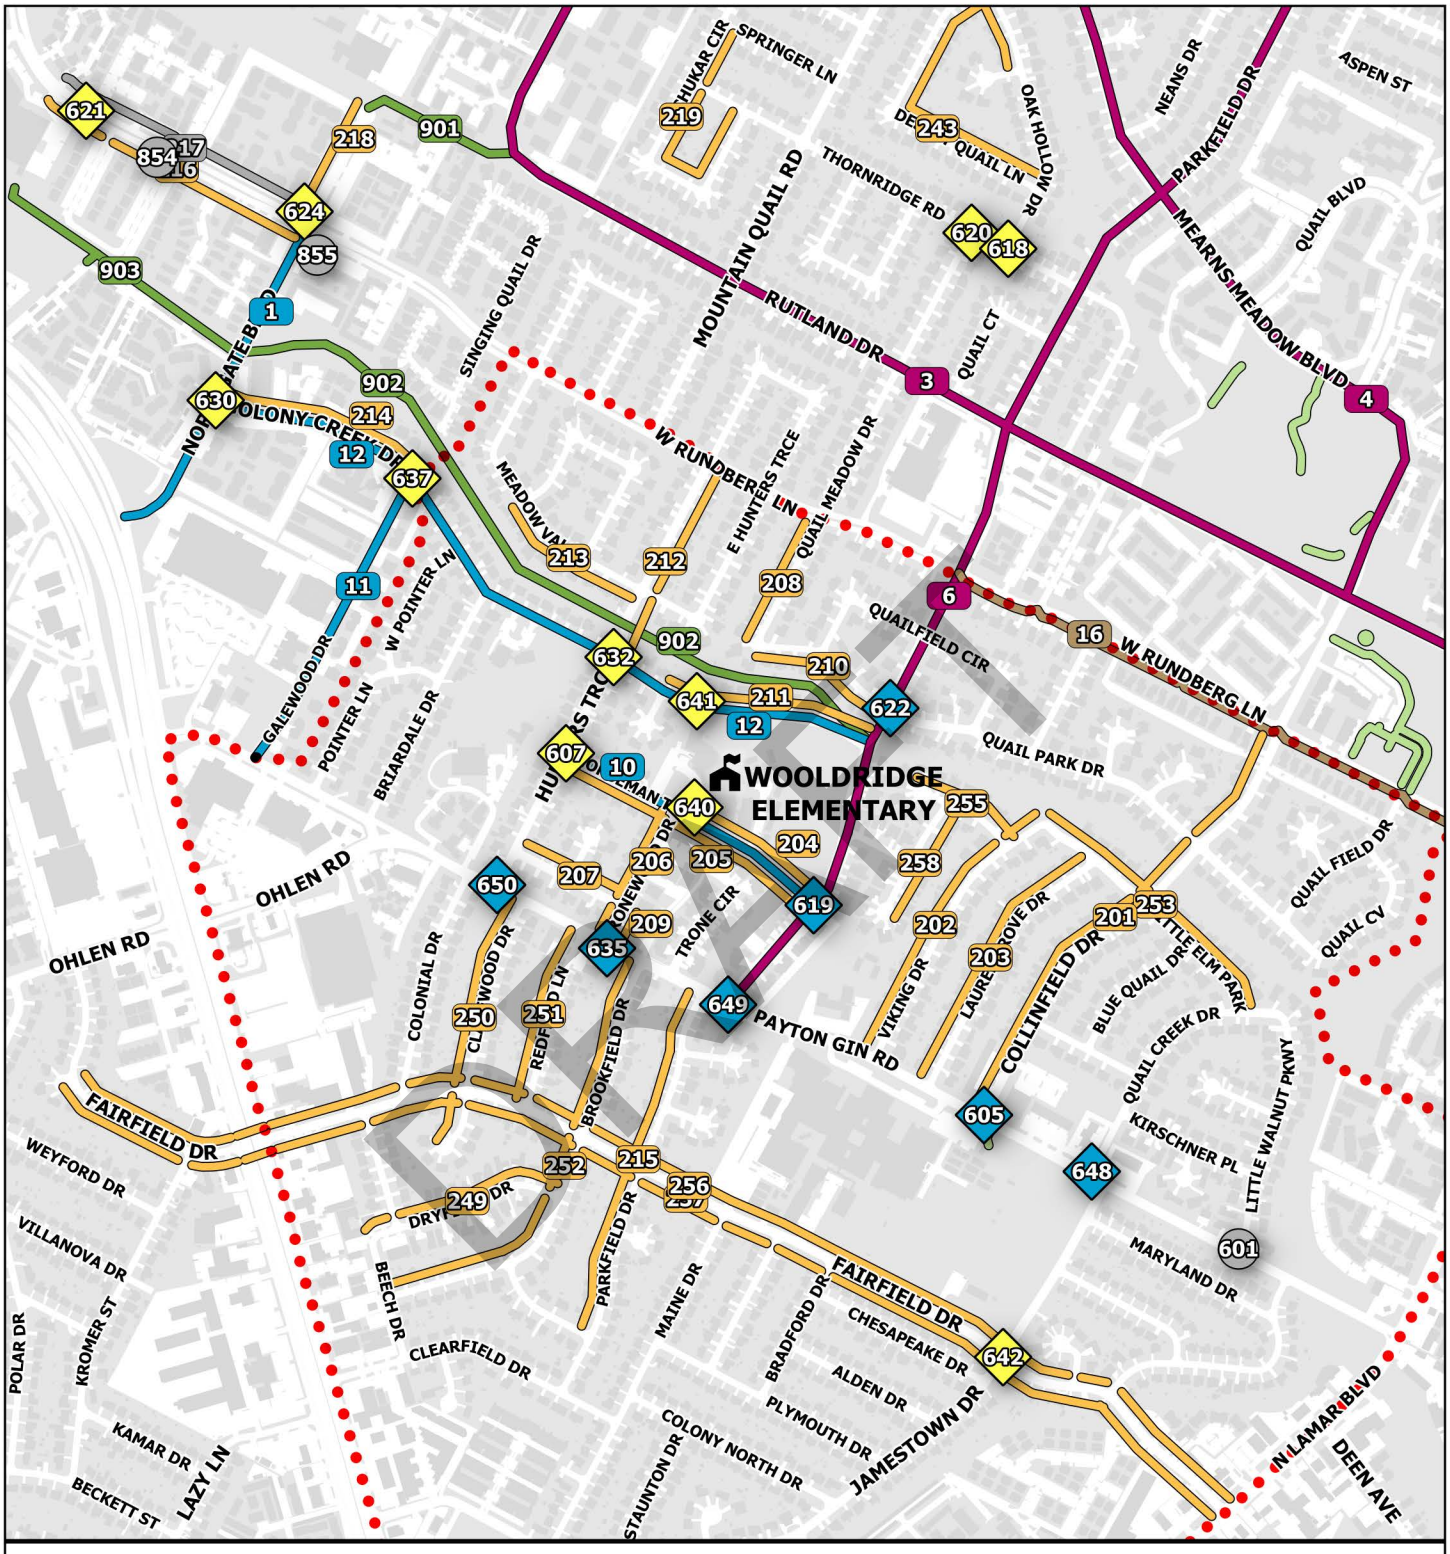

DRAFT

SAFE ROUTES TO SCHOOL

austin MOTION

TOOLE DESIGN

0 800 1600 2400 ft

- Off-Street Trail
- Bike Lane / Buffered Bike Lane / Protected Bike Lane
- Sidepath
- Neighborhood Bikeway / Traffic Calming
- New / Improved Sidewalk
- Other linear recommendation
- Traffic Control / Intersection Reconfiguration
- Ramp / Curb Extension / Crosswalk
- Over / Underpass
- Other Spot Recommendation
- Existing Trail
- School Boundary

Project ID	Nearby School(s)	Location	Issue	Recommendation + = parking removal required * = curb changes required ~ = private property acquisition required	Benefit Category	Cost:Benefit Category
4C - 001	PADRON	NORTHGATE BLVD	Excessive vehicle speeds, No bike facility	Add speed cushions - NORTHGATE BLVD from W RUNDBERG LN to RESEARCH BLVD SVRD NB , Add neighborhood bikeway - NORTHGATE BLVD from W RUNDBERG LN to RESEARCH BLVD SVRD NB , Add median - NORTHGATE BLVD from COLONY CREEK DR to W RUNDBERG LN	1 - Very High	1 - Very High
4C - 002	PADRON	METRIC BLVD	Excessive vehicle speeds	Add vertical element to existing buffer - METRIC BLVD from RUTLAND DR to RESEARCH BLVD SVRD NB	3 - Medium	4 - Low
4C - 003	COOK, GUERRERO THOMPSON, PADRON, WOOLDRIDGE, BARRINGTON	RUTLAND DR	Desired bike route, No bike facility	Add sidepath - RUTLAND DR from METRIC BLVD to MOUNTAIN QUAIL RD , Add bike lane - RUTLAND DR from N LAMAR BLVD to MOUNTAIN QUAIL RD , Lane reconfiguration (changing number of lanes) - RUTLAND DR from N LAMAR BLVD to MOUNTAIN QUAIL RD	1 - Very High	5 - Very Low
4C - 004	COOK	MEARNS MEADOW BLVD	No bike facility, Wide ROW	Add protected bike lane - BOYER BLVD from METRIC BLVD to MEARNS MEADOW BLVD , Add protected bike lane - MEARNS MEADOW BLVD from BOYER BLVD to RUTLAND DR +	1 - Very High	3 - Medium
4C - 005	COOK	QUAIL VALLEY BLVD	Excessive vehicle speeds, Wide ROW	Add speed cushions - QUAIL VALLEY BLVD from MEARNS MEADOW BLVD to CRIPPLE CREEK DR	1 - Very High	1 - Very High
4C - 006	WOOLDRIDGE, MCBEE, COOK	PARKFIELD DR	Excessive vehicle speeds, Faded markings, Wide ROW	Add median - PARKFIELD DR from W RUNDBERG LN to PAYTON GIN RD , Add protected bike lane - PARKFIELD DR from PAYTON GIN RD to W BRAKER LN +	1 - Very High	4 - Low

DRAFT

Estimated Cost: Benefit rankings are preliminary, planning level-estimates to identify cost-effective options for addressing safety concerns. Estimated Cost: Benefit rankings are developed using planning level costs for projects of this nature. Individual project cost estimates will change as projects advance. See pages 4-5 of this report for more information about how the Safe Routes Program determines project prioritization and implementation.

Project ID	Nearby School(s)	Location	Issue	Recommendation + = parking removal required * = curb changes required ~ = private property acquisition required	Benefit Category	Cost:Benefit Category
4C - 008	MCBEE, WALNUT CREEK	KRAMER LN	Desired bike route, Excessive vehicle speeds	Lane reconfiguration (changing number of lanes) - KRAMER LN from PLAINS TRL to N LAMAR BLVD , Add protected bike lane - KRAMER LN from PLAINS TRL to N LAMAR BLVD	1 - Very High	1 - Very High
4C - 009	COOK, MCBEE	PLAINS TRL	Desired bike route, Excessive vehicle speeds	Add speed cushions - PLAINS TRL from S MEADOWS DR to KRAMER LN , Add speed cushions - PLAINS TRL from KRAMER LN to W BRAKER LN	1 - Very High	1 - Very High
4C - 010	WOOLDRIDGE	NORSEMAN TER	Excessive vehicle speeds	Add speed cushions - NORSEMAN TER from HUNTERS TRCE to PARKFIELD DR	1 - Very High	1 - Very High
4C - 011	WOOLDRIDGE, PADRON	GALEWOOD DR	Excessive vehicle speeds, No bike facility	Add median - GALEWOOD DR from COLONY CREEK DR to PAYTON GIN RD , Add speed cushions - GALEWOOD DR from COLONY CREEK DR to PAYTON GIN RD , Add neighborhood bikeway - GALEWOOD DR from COLONY CREEK DR to PAYTON GIN RD	2 - High	2 - High
4C - 012	WOOLDRIDGE, PADRON	COLONY CREEK DR	Excessive vehicle speeds, No bike facility	Add median - COLONY CREEK DR from NORTHGATE BLVD to GALEWOOD DR , Add speed cushions - COLONY CREEK DR from LODGE CT to NORTHGATE BLVD , Add chicanes - COLONY CREEK DR from LODGE CT to GALEWOOD DR , Add neighborhood bikeway - COLONY CREEK DR from PARKFIELD DR to NORTHGATE BLVD	1 - Very High	1 - Very High
4C - 015	REILLY	N LAMAR BLVD	No bike facility	Add sidepath - N LAMAR BLVD from KOENIG LN to WALLINGFORD BEND DR ~ *	1 - Very High	5 - Very Low
4C - 016	GUERRERO THOMPSON, WOOLDRIDGE, BARRINGTON	W RUNDBERG LN	No bike facility	Add sidepath - W RUNDBERG LN from PARKFIELD DR to E RUNDBERG LN , Add sidepath - E RUNDBERG LN from NORTH CREEK DR to W RUNDBERG LN	1 - Very High	5 - Very Low

DRAFT

Estimated Cost: Benefit rankings are preliminary, planning level-estimates to identify cost-effective options for addressing safety concerns. Estimated Cost: Benefit rankings are developed using planning level costs for projects of this nature. Individual project cost estimates will change as projects advance. See pages 4-5 of this report for more information about how the Safe Routes Program determines project prioritization and implementation.

Project ID	Nearby School(s)	Location	Issue	Recommendation + = parking removal required * = curb changes required ~ = private property acquisition required	Benefit Category	Cost:Benefit Category
4C - 017	MCBEE, WALNUT CREEK	N LAMAR BLVD	No bike facility	Add sidepath - N LAMAR BLVD from W BRAKER LN to FERGUSON DR	1 - Very High	4 - Low
4C - 201	BARRINGTON, WOOLDRIDGE	COLLINFIELD DR	Missing sidewalk	Construct new sidewalk - COLLINFIELD DR from PAYTON GIN RD to W RUNDBERG LN	1 - Very High	3 - Medium
4C - 202	WOOLDRIDGE	VIKING DR	Missing sidewalk	Construct new sidewalk - VIKING DR from PAYTON GIN RD to LITTLE ELM PARK	1 - Very High	3 - Medium
4C - 203	WOOLDRIDGE	LAUREL GROVE DR	Missing sidewalk	Construct new sidewalk - LAUREL GROVE DR from PAYTON GIN RD to LITTLE ELM PARK	2 - High	3 - Medium
4C - 204	WOOLDRIDGE	NORSEMAN TER	Narrow sidewalk	Widen existing sidewalk - NORSEMAN TER from TRONEWOOD DR to PARKFIELD DR	3 - Medium	3 - Medium
4C - 205	WOOLDRIDGE	NORSEMAN TER	Missing sidewalk	Construct new sidewalk - NORSEMAN TER from HUNTERS TRCE to PARKFIELD DR	1 - Very High	1 - Very High
4C - 206	WOOLDRIDGE	TRONEWOOD DR	Missing sidewalk	Construct new sidewalk - TRONEWOOD DR from PAYTON GIN RD to NORSEMAN TER	1 - Very High	1 - Very High
4C - 207	WOOLDRIDGE	WESTBURY TRL	Missing sidewalk	Construct new sidewalk - WESTBURY TRL from TRONEWOOD DR to HUNTERS TRCE	1 - Very High	1 - Very High
4C - 208	WOOLDRIDGE	QUAIL MEADOW DR	Missing sidewalk	Construct new sidewalk - QUAIL MEADOW DR from W RUNDBERG LN to QUAIL PARK DR	2 - High	2 - High
4C - 209	WOOLDRIDGE	TRONEWOOD DR	Poor condition	Repair existing sidewalk - TRONEWOOD DR from PAYTON GIN RD to WESTBURY TRL	5 - Very Low	3 - Medium
4C - 210	WOOLDRIDGE	QUAIL PARK DR	Missing sidewalk	Construct new sidewalk - QUAIL PARK DR from PARKFIELD DR to QUAIL MEADOW DR	2 - High	2 - High
4C - 211	WOOLDRIDGE	COLONY CREEK DR	Poor condition, Temporary obstruction (ex. vegetation)	Repair existing sidewalk - COLONY CREEK DR from PARKFIELD DR to LODGE CT	4 - Low	4 - Low
4C - 212	WOOLDRIDGE	HUNTERS TRCE	Missing sidewalk	Construct new sidewalk - HUNTERS TRCE from W RUNDBERG LN to COLONY CREEK DR	1 - Very High	1 - Very High
4C - 213	WOOLDRIDGE	MEADOW VALE	Missing sidewalk	Construct new sidewalk - MEADOW VALE from HUNTERS TRCE to PARTRIDGE CIR	2 - High	2 - High

DRAFT

Estimated Cost: Benefit rankings are preliminary, planning level-estimates to identify cost-effective options for addressing safety concerns. Estimated Cost: Benefit rankings are developed using planning level costs for projects of this nature. Individual project cost estimates will change as projects advance. See pages 4-5 of this report for more information about how the Safe Routes Program determines project prioritization and implementation.

Project ID	Nearby School(s)	Location	Issue	Recommendation + = parking removal required * = curb changes required ~ = private property acquisition required	Benefit Category	Cost:Benefit Category
4C - 214	PADRON, WOOLDRIDGE	COLONY CREEK DR	Poor condition, Temporary obstruction (ex. vegetation)	Repair existing sidewalk - COLONY CREEK DR from NORTHGATE BLVD to GALEWOOD DR , Trim vegetation - COLONY CREEK DR from NORTHGATE BLVD to GALEWOOD DR	5 - Very Low	5 - Very Low
4C - 215	WOOLDRIDGE	PARKFIELD DR	Missing sidewalk	Construct new sidewalk - PARKFIELD DR from PAYTON GIN RD to LARKSPUR RD	1 - Very High	2 - High
4C - 216	PADRON	W RUNDBERG LN	No lighting, Poor condition, Temporary obstruction (ex. vegetation)	Widen existing sidewalk - W RUNDBERG LN from WEST LOOP to school driveway , Trim vegetation - W RUNDBERG LN from WEST LOOP to school driveway , Add lighting - W RUNDBERG LN from WEST LOOP to school driveway , Widen existing sidewalk - W RUNDBERG LN from NORTHGATE BLVD to WEST LOOP , Repair existing sidewalk - W RUNDBERG LN from WEST LOOP to NORTHGATE BLVD	3 - Medium	4 - Low
4C - 217	PADRON	W RUNDBERG LN	No lighting, Temporary obstruction (ex. vegetation)	Trim vegetation - W RUNDBERG LN from Near 2018 RUNDBERG LN to WEST LOOP , Add lighting - W RUNDBERG LN from NORTHGATE BLVD to Near 2018 RUNDBERG LN , Trim vegetation - W RUNDBERG LN from NORTHGATE BLVD to WEST LOOP	3 - Medium	2 - High
4C - 218	PADRON	NORTHGATE BLVD	Poor condition	Repair existing sidewalk - NORTHGATE BLVD from W RUNDBERG LN to Near 9332 NORTHGATE BLVD	4 - Low	4 - Low
4C - 219	COOK	CHUKAR CIR	Missing sidewalk	Construct new sidewalk - CHUKAR CIR from SPRINGER LN to Near 9609 CHUKAR CIR	3 - Medium	3 - Medium
4C - 220	COOK	OAK HOLLOW DR	Missing sidewalk	Construct new sidewalk - OAK HOLLOW DR from MOUNTAIN QUAIL RD to QUAIL COVER CIR	2 - High	2 - High

DRAFT

Estimated Cost: Benefit rankings are preliminary, planning level-estimates to identify cost-effective options for addressing safety concerns. Estimated Cost: Benefit rankings are developed using planning level costs for projects of this nature. Individual project cost estimates will change as projects advance. See pages 4-5 of this report for more information about how the Safe Routes Program determines project prioritization and implementation.

Project ID	Nearby School(s)	Location	Issue	Recommendation + = parking removal required * = curb changes required ~ = private property acquisition required	Benefit Category	Cost:Benefit Category
4C - 221	COOK	OAK HOLLOW DR	Missing sidewalk	Construct new sidewalk - OAK HOLLOW DR from MOUNTAIN QUAIL RD to DESERT QUAIL LN	2 - High	2 - High
4C - 222	COOK	MEARNS MEADOW BLVD	Poor condition	Repair existing sidewalk - MEARNS MEADOW BLVD from MOUNTAIN QUAIL RD to QUAIL VALLEY BLVD	4 - Low	4 - Low
4C - 223	COOK	QUAIL VALLEY BLVD	Missing sidewalk, Poor condition	Repair existing sidewalk - QUAIL VALLEY BLVD from MEARNS MEADOW BLVD to OAK HOLLOW DR	4 - Low	3 - Medium
4C - 224	COOK	QUAIL VALLEY BLVD	Missing sidewalk	Construct new sidewalk - QUAIL VALLEY BLVD from MEARNS MEADOW BLVD to CRIPPLE CREEK DR	1 - Very High	1 - Very High
4C - 225	COOK	RUTLAND DR	Missing sidewalk	Construct new sidewalk - RUTLAND DR from METRIC BLVD to GOLDEN MEADOW DR	2 - High	3 - Medium
4C - 226	COOK	GOLDEN MEADOW DR	Missing sidewalk	Construct new sidewalk - GOLDEN MEADOW DR from RUTLAND DR to LITTLE PEBBLE DR	2 - High	4 - Low
4C - 227	COOK	MACMORA RD	Missing sidewalk	Construct new sidewalk - MACMORA RD from MEARNS MEADOW BLVD to KRAMER LN	1 - Very High	4 - Low
4C - 228	MCBEE	PARSONS DR	Missing sidewalk	Construct new sidewalk - PARSONS DR from PARKFIELD DR to RENEL DR	3 - Medium	2 - High
4C - 229	MCBEE	SELMA DR	Missing sidewalk	Construct new sidewalk - SELMA DR from KRAMER LN to RENEL DR	2 - High	3 - Medium
4C - 230	MCBEE	PLAINS TRL	Missing sidewalk, No lighting	Construct new sidewalk - PLAINS TRL from KRAMER LN to W BRAKER LN , Add lighting - PLAINS TRL from KRAMER LN to W BRAKER LN	1 - Very High	1 - Very High
4C - 231	COOK, MCBEE	PLAINS TRL	Missing sidewalk, No lighting	Add lighting - PLAINS TRL from S MEADOWS DR to KRAMER LN , Construct new sidewalk - PLAINS TRL from S MEADOWS DR to KRAMER LN	1 - Very High	4 - Low

DRAFT

Estimated Cost: Benefit rankings are preliminary, planning level-estimates to identify cost-effective options for addressing safety concerns. Estimated Cost: Benefit rankings are developed using planning level costs for projects of this nature. Individual project cost estimates will change as projects advance. See pages 4-5 of this report for more information about how the Safe Routes Program determines project prioritization and implementation.

Project ID	Nearby School(s)	Location	Issue	Recommendation + = parking removal required * = curb changes required ~ = private property acquisition required	Benefit Category	Cost:Benefit Category
4C - 232	COOK	S MEADOWS DR	Missing sidewalk	Construct new sidewalk - S MEADOWS DR from BERTHOUND DR to SAGEBRUSH DR	2 - High	4 - Low
4C - 233	COOK	NEANS DR	Missing sidewalk	Construct new sidewalk - NEANS DR from RAY AVE to PARKFIELD DR	3 - Medium	4 - Low
4C - 234	COOK	S MEADOWS DR	Missing sidewalk	Construct new sidewalk - S MEADOWS DR from PLAINS TRL to SAGEBRUSH DR	3 - Medium	3 - Medium
4C - 235	MCBEE	FAUNTLEROY TRL	Missing sidewalk	Construct new sidewalk - FAUNTLEROY TRL from PLAINS TRL to NEWMONT RD	3 - Medium	3 - Medium
4C - 236	COOK	PLAINS TRL	Temporary obstruction (ex. vegetation)	Trim vegetation - PLAINS TRL from S MEADOWS DR to N MEADOWS DR	5 - Very Low	4 - Low
4C - 237	COOK	N MEADOWS DR	Missing sidewalk	Construct new sidewalk - N MEADOWS DR from PLAINS TRL to NEWMONT RD	3 - Medium	4 - Low
4C - 238	MCBEE	WINDY TRL	Missing sidewalk, Temporary obstruction (ex. vegetation)	Construct new sidewalk - WINDY TRL from NEWMONT RD to PLAINS TRL	3 - Medium	3 - Medium
4C - 239	WALNUT CREEK, MCBEE	WAGON TRL	Missing sidewalk	Construct new sidewalk - WAGON TRL from N LAMAR BLVD to PLAINS TRL	3 - Medium	4 - Low
4C - 240	WALNUT CREEK, MCBEE	PRAIRIE TRL	Missing sidewalk	Construct new sidewalk - PRAIRIE TRL from N LAMAR BLVD to PLAINS TRL	1 - Very High	3 - Medium
4C - 241	MCBEE	PLAINS TRL	Missing sidewalk	Construct new sidewalk - PLAINS TRL from KRAMER LN to W BRAKER LN	2 - High	2 - High
4C - 242	BARRINGTON, GUERRERO THOMPSON	N LAMAR BLVD	Missing sidewalk	Construct new sidewalk - N LAMAR BLVD from RUTLAND DR to W LONGSPUR BLVD	1 - Very High	2 - High
4C - 243	COOK	DESERT QUAIL LN	Missing sidewalk	Construct new sidewalk - DESERT QUAIL LN from OAK HOLLOW DR to OAK HOLLOW DR	2 - High	3 - Medium
4C - 244	WALNUT CREEK, MCBEE	NEWMONT RD	Missing sidewalk	Construct new sidewalk - NEWMONT RD from PRAIRIE TRL to SAGEBRUSH DR	1 - Very High	3 - Medium
4C - 245	MCBEE, WALNUT CREEK	MC PHAUL ST	Missing sidewalk	Construct new sidewalk - MC PHAUL ST from N LAMAR BLVD to NEWMONT RD	2 - High	3 - Medium

DRAFT

Estimated Cost: Benefit rankings are preliminary, planning level-estimates to identify cost-effective options for addressing safety concerns. Estimated Cost: Benefit rankings are developed using planning level costs for projects of this nature. Individual project cost estimates will change as projects advance. See pages 4-5 of this report for more information about how the Safe Routes Program determines project prioritization and implementation.

Project ID	Nearby School(s)	Location	Issue	Recommendation + = parking removal required * = curb changes required ~ = private property acquisition required	Benefit Category	Cost:Benefit Category
4C - 246	BURNET, MCBEE	SAGEBRUSH DR	Missing sidewalk	Construct new sidewalk - SAGEBRUSH DR from N LAMAR BLVD to NEWMONT RD	3 - Medium	4 - Low
4C - 247	MCBEE	RENEL DR	Missing sidewalk	Construct new sidewalk - RENEL DR from W BRAKER LN to KRAMER LN	3 - Medium	3 - Medium
4C - 248	BURNET, MCBEE	N LAMAR BLVD	Missing sidewalk	Construct new sidewalk - N LAMAR BLVD from NEANS DR to N MEADOWS DR	1 - Very High	1 - Very High
4C - 249	WOOTEN, WOOLDRIDGE	DRYFIELD DR	Missing sidewalk	Construct new sidewalk - DRYFIELD DR from BEECH DR to BROOKFIELD DR	2 - High	2 - High
4C - 250	WOOLDRIDGE	CLAREWOOD CIR	Missing sidewalk	Construct new sidewalk - CLAREWOOD CIR from FAIRFIELD DR to Near 8604 CLAREWOOD CIR , Construct new sidewalk - CLAREWOOD DR from FAIRFIELD DR to PAYTON GIN RD	2 - High	3 - Medium
4C - 251	WOOLDRIDGE	REDFIELD LN	Missing sidewalk	Construct new sidewalk - REDFIELD LN from FAIRFIELD DR to PAYTON GIN RD	2 - High	2 - High
4C - 252	WOOTEN, WOOLDRIDGE	BROOKFIELD DR	Missing sidewalk	Construct new sidewalk - BROOKFIELD DR from PAYTON GIN RD to BEECH DR	1 - Very High	3 - Medium
4C - 253	BARRINGTON, WOOLDRIDGE	LITTLE ELM PARK	Missing sidewalk	Construct new sidewalk - LITTLE ELM PARK from VIKING DR to QUAIL CREEK DR	2 - High	3 - Medium
4C - 255	WOOLDRIDGE	INLAND GREENS	Missing sidewalk	Construct new sidewalk - INLAND GREENS from end to VIKING DR	2 - High	2 - High
4C - 256	WOOTEN, WOOLDRIDGE, BURNET	FAIRFIELD DR	Missing sidewalk	Construct new sidewalk - FAIRFIELD DR from CONTOUR DR to RESEARCH BLVD SVRD SB , Construct new sidewalk - FAIRFIELD DR from RESEARCH BLVD SVRD SB to RESEARCH BLVD NB , Construct new sidewalk - FAIRFIELD DR from N LAMAR BLVD to RESEARCH BLVD SVRD NB	1 - Very High	4 - Low

DRAFT

Estimated Cost: Benefit rankings are preliminary, planning level-estimates to identify cost-effective options for addressing safety concerns. Estimated Cost: Benefit rankings are developed using planning level costs for projects of this nature. Individual project cost estimates will change as projects advance. See pages 4-5 of this report for more information about how the Safe Routes Program determines project prioritization and implementation.

Project ID	Nearby School(s)	Location	Issue	Recommendation + = parking removal required * = curb changes required ~ = private property acquisition required	Benefit Category	Cost:Benefit Category
4C - 257	WOOTEN, BURNET, WOOLDRIDGE	FAIRFIELD DR	Missing sidewalk	Construct new sidewalk - FAIRFIELD DR from CONTOUR DR to RESEARCH BLVD NB , Construct new sidewalk - FAIRFIELD DR from N LAMAR BLVD to RESEARCH BLVD SVRD NB	1 - Very High	4 - Low
4C - 258	WOOLDRIDGE	QUAIL VALLEY DR	Missing sidewalk	Construct new sidewalk - QUAIL VALLEY DR from Near 9003 QUAIL VALLEY DR to INLAND GREENS	2 - High	2 - High
4C - 601	BARRINGTON	LITTLE WALNUT PKWY / PAYTON GIN RD	Poor sightlines	Trim vegetation on NW corner	5 - Very Low	3 - Medium
4C - 602	COOK	CHUKAR CIR / OAK HOLLOW DR	Missing curb ramps	Add new curb ramp [4]	2 - High	1 - Very High
4C - 603	COOK	COOPER HILL DR / PARKFIELD DR	Missing curb ramps	Add new curb ramp [4]	3 - Medium	1 - Very High
4C - 604	BROWN	MORROW ST / N LAMAR BLVD / N LAMAR BLVD NB / N LAMAR BLVD SB / N LAMAR BLVD SVRD NB / N LAMAR BLVD SVRD SB	Faded crosswalk markings, High speed crossing, Long crossing distance	Add median refuge island on N Larmar Blvd(southern pedestrian crossing) , Install high visibility crosswalk [4] across Morrow St and Lamar Blvd (all legs & including slip lane) *	3 - Medium	2 - High
4C - 605	WOOLDRIDGE	COLLINFIELD DR / PAYTON GIN RD	High speed crossing, Long crossing distance, Non-compliant curb ramps	Add median refuge island on Payton Gin Rd , Replace existing curb ramp [1]	1 - Very High	1 - Very High
4C - 606	COOK	GOLDEN QUAIL DR / PINE KNOLL DR	Missing curb ramps	Add new curb ramp [4]	2 - High	1 - Very High
4C - 607	WOOLDRIDGE	HUNTERS TRCE / NORSEMAN TER	High speed crossing, Long crossing distance	Add curb extensions [3] on Hunters Trace & Norseman Terrace *	1 - Very High	1 - Very High
4C - 608	COOK	BUTTON QUAIL DR / CRIPPLE CREEK DR	Missing curb ramps	Add new curb ramp [2]	1 - Very High	1 - Very High

DRAFT

Estimated Cost: Benefit rankings are preliminary, planning level-estimates to identify cost-effective options for addressing safety concerns. Estimated Cost: Benefit rankings are developed using planning level costs for projects of this nature. Individual project cost estimates will change as projects advance. See pages 4-5 of this report for more information about how the Safe Routes Program determines project prioritization and implementation.

Project ID	Nearby School(s)	Location	Issue	Recommendation + = parking removal required * = curb changes required ~ = private property acquisition required	Benefit Category	Cost:Benefit Category
4C - 609	COOK	CRIPPLE CREEK CV / CRIPPLE CREEK DR / MOUNTAIN QUAIL RD	Long crossing distance, Missing curb ramps, Non-compliant curb ramps	Add curb extensions [2] on Cripple Creek & Mountain Quail	1 - Very High	1 - Very High
4C - 610	MCBEE	AUSTIN PARK LN / PLAINS TRL / W BRAKER LN	High speed crossing, Long crossing distance	Add median refuge island on W Braker Ln , Install high visibility crosswalk [1] across Braker Ln , Install Pedestrian Hybrid Beacon , Replace existing curb ramp [1]	1 - Very High	2 - High
4C - 611	COOK	OAK HOLLOW DR / OAK RUN DR	Missing curb ramps	Add new curb ramp [2]	2 - High	1 - Very High
4C - 612	PADRON	METRIC BLVD / W RUNDBERG LN	Medians extend into crosswalks	Redesign all 4 medians to allow accessible crossing	4 - Low	4 - Low
4C - 614	COOK	QUAIL RIDGE DR / QUAIL VALLEY BLVD	Non-compliant curb ramps	Replace existing curb ramp [1]	4 - Low	2 - High
4C - 615	MCBEE	KRAMER LN / PLAINS TRL	Missing curb ramps	Add new curb ramp [2]	2 - High	1 - Very High
4C - 616	COOK	MEARNS MEADOW BLVD / MOUNTAIN QUAIL RD	Long crossing distance, Wide curb radii	Add curb extensions [4] on Mountain Quail & Mearns Meadow	1 - Very High	1 - Very High
4C - 618	COOK	OAK HOLLOW DR / THORNRIDGE RD	Missing curb ramps	Add new curb ramp [4]	1 - Very High	1 - Very High
4C - 619	WOOLDRIDGE	NORSEMAN TER / PARKFIELD DR	High speed crossing, Long crossing distance, Non-compliant curb ramps	Add curb extensions [3] on Parkfield; Norseman Terrace , Add median refuge island on Parkfield , Replace existing curb ramp [3] *	1 - Very High	1 - Very High
4C - 620	COOK	GAMBELS QUAIL DR / THORNRIDGE RD	Missing curb ramps	Add new curb ramp [4]	1 - Very High	1 - Very High
4C - 621	PADRON	W RUNDBERG LN	Missing curb ramps, No lighting, Stop bar <20 ft from crosswalk; overgrown trees	Add lighting , Add new curb ramp [2] , Remove stop bars and repaint 20-25 ft from crosswalk; trim trees blocking PHB	1 - Very High	1 - Very High

DRAFT

Estimated Cost: Benefit rankings are preliminary, planning level-estimates to identify cost-effective options for addressing safety concerns. Estimated Cost: Benefit rankings are developed using planning level costs for projects of this nature. Individual project cost estimates will change as projects advance. See pages 4-5 of this report for more information about how the Safe Routes Program determines project prioritization and implementation.

Project ID	Nearby School(s)	Location	Issue	Recommendation + = parking removal required * = curb changes required ~ = private property acquisition required	Benefit Category	Cost:Benefit Category
4C - 622	WOOLDRIDGE	PARKFIELD DR / QUAIL PARK DR	Long crossing distance, Non-compliant curb ramps, Wide curb radii	Add curb extensions [4] on Parkfield , Add median refuge island on Parkfield , Evaluate need for existing 4-way stop *	1 - Very High	1 - Very High
4C - 623	COOK	GOLDEN QUAIL DR / MACMORA RD	Missing curb ramps	Add new curb ramp [2]	2 - High	1 - Very High
4C - 624	PADRON	NORTHGATE BLVD / W RUNDBERG LN	Faded crosswalk markings, Long crossing distance, No lighting, Wide curb radii	Add curb extensions [4] on Northgate , Add lighting , Install high visibility crosswalk [4] across Northgate & Rundberg *	1 - Very High	5 - Very Low
4C - 625	COOK	MEARNS MEADOW BLVD / QUAIL VALLEY BLVD	Long crossing distance, Wide curb radii	Add curb extensions [4] on Quail Valley & Mearns Meadow *	1 - Very High	1 - Very High
4C - 626	COOK	QUAIL HUTCH DR / QUAIL VALLEY BLVD	Non-compliant curb ramps	Replace existing curb ramp [1]	4 - Low	2 - High
4C - 627	COOK	CRIPPLE CREEK DR / QUAIL VALLEY BLVD	Faded crosswalk markings, Long crossing distance, Non-compliant curb ramps	Add curb extensions [2] on Cripple Creek & Quail Valley , Repaint crosswalk markings [2] across Cripple Creek & Quail Valley , Replace existing curb ramp [3] *	1 - Very High	1 - Very High
4C - 628	COOK	BUTTON QUAIL CV / CRIPPLE CREEK DR	Missing curb ramps	Add new curb ramp [2]	1 - Very High	1 - Very High
4C - 629	COOK	CRIPPLE CREEK DR / PINE KNOLL DR	Difficult crossing, Missing curb ramps	Add new curb ramp [4] , Install high visibility crosswalk [2] across Cripple Creek & Pine Knoll	2 - High	1 - Very High
4C - 630	PADRON	COLONY CREEK DR / NORTHGATE BLVD	Difficult crossing, High speed crossing, No lighting, Poor sightlines	Add curb extensions [3] on Northgate & Colony Creek , Add lighting , Install high visibility crosswalk [2] across Northgate & Colony Creek *	1 - Very High	5 - Very Low

DRAFT

Estimated Cost: Benefit rankings are preliminary, planning level-estimates to identify cost-effective options for addressing safety concerns. Estimated Cost: Benefit rankings are developed using planning level costs for projects of this nature. Individual project cost estimates will change as projects advance. See pages 4-5 of this report for more information about how the Safe Routes Program determines project prioritization and implementation.

Project ID	Nearby School(s)	Location	Issue	Recommendation + = parking removal required * = curb changes required ~ = private property acquisition required	Benefit Category	Cost:Benefit Category
4C - 631	COOK	GOLDEN MEADOW DR / MEARNS MEADOW BLVD	Difficult crossing, Long crossing distance, Non-compliant curb ramps, Wide curb radii	Add curb extensions [4] on Golden Meadow & Mearns Meadow , Install high visibility crosswalk [4] across Golden Meadow & Mearns Meadow	2 - High	2 - High
4C - 632	WOOLDRIDGE	COLONY CREEK DR / HUNTERS TRCE	Difficult crossing, Long crossing distance, Wide curb radii	Add curb extensions [4] on Colony Creek & Hunters Trace , Install high visibility crosswalk [1] across Hunters Trace & N leg *	1 - Very High	1 - Very High
4C - 633	COOK	PLAINS TRL / S MEADOWS DR	Difficult crossing, Missing curb ramps, No lighting	Add lighting , Add new curb ramp [2] , Install high visibility crosswalk [2] across Meadows Dr & Plains Trl	3 - Medium	2 - High
4C - 634	COOK	QUAIL VALLEY BLVD / RUTLAND DR	Difficult crossing, High speed crossing, Poor sightlines	Eliminate slip lane [1] , Install high visibility crosswalk [1] across Quail Valley , Replace existing curb ramp [2] *	1 - Very High	2 - High
4C - 635	WOOLDRIDGE	PAYTON GIN RD / TRONEWOOD DR	Difficult crossing, High speed crossing, Long crossing distance, Missing curb ramps	Add new curb ramp [1] , Install high visibility crosswalk [2] across Payton Gin Rd and Tronewood Dr , Install Pedestrian Hybrid Beacon	1 - Very High	1 - Very High
4C - 636	COOK	LEDGEWOOD DR / RUTLAND DR	Difficult crossing, Non-compliant curb ramps	Install high visibility crosswalk [1] across Ledgewood , Replace existing curb ramp [2]	1 - Very High	1 - Very High
4C - 637	WOOLDRIDGE, PADRON	COLONY CREEK DR / GALEWOOD DR	Difficult crossing, High speed crossing, No lighting, Poor sightlines, Wide curb radii	Add curb extensions [3] on Galewood & Colony Creek , Add lighting , Install high visibility crosswalk [2] across Galewood & Colony Creek *	2 - High	2 - High

DRAFT

Estimated Cost: Benefit rankings are preliminary, planning level-estimates to identify cost-effective options for addressing safety concerns. Estimated Cost: Benefit rankings are developed using planning level costs for projects of this nature. Individual project cost estimates will change as projects advance. See pages 4-5 of this report for more information about how the Safe Routes Program determines project prioritization and implementation.

Project ID	Nearby School(s)	Location	Issue	Recommendation + = parking removal required * = curb changes required ~ = private property acquisition required	Benefit Category	Cost:Benefit Category
4C - 638	COOK	Midblock - RUTLAND DR	Faded crosswalk markings, High speed crossing, Long crossing distance, Missing curb ramps, No lighting	Add lighting , Add median refuge island on Rutland Dr , Add new curb ramp [2] , Install Rapid Flashing Beacon	1 - Very High	1 - Very High
4C - 639	MCBEE	Midblock - KRAMER LN	High speed crossing, No lighting, No pedestrian signals	Add lighting , Add median refuge island on Kramer , Install Rapid Flashing Beacon	1 - Very High	1 - Very High
4C - 640	WOOLDRIDGE	NORSEMAN TER	Long crossing distance, No lighting	Add curb extensions [2] on Norseman Terrace , Add lighting *	1 - Very High	1 - Very High
4C - 641	WOOLDRIDGE	Midblock - COLONY CREEK DR	High speed crossing, Long crossing distance, Poor sightlines	Add curb extensions [2] on Colony Creek , Install raised crosswalk [1] across Colony Creek	1 - Very High	1 - Very High
4C - 642	BURNET, WOOLDRIDGE	FAIRFIELD DR / JAMESTOWN DR	Faded crosswalk markings, Missing curb ramps, Non-compliant curb ramps, Wide curb radii	Add curb extensions [2] on Fairfield Dr & NW and SE corners , Install high visibility crosswalk [3] across Jamestown & Fairfield	1 - Very High	1 - Very High
4C - 643	MCBEE	Midblock - W BRAKER LN	Difficult crossing, Long crossing distance, Wide curb radii	Add median refuge island on School parking lot driveway , Install high visibility crosswalk [1] across School parking lot driveway , Tighten curb radii ~ *	1 - Very High	1 - Very High
4C - 644	MCBEE	KRAMER LN / PLAINS TRL	Non-compliant curb ramps	Replace existing curb ramp [2]	4 - Low	2 - High
4C - 645	GUERRERO THOMPSON, BARRINGTON	N LAMAR BLVD / W LONGSPUR BLVD	Difficult crossing	Add Leading Pedestrian Interval (LPI) , Add median refuge island on Lamar Blvd , Add new curb ramp [2] , Install high visibility crosswalk [1] across south leg of Lamar Blvd	1 - Very High	1 - Very High

DRAFT

Estimated Cost: Benefit rankings are preliminary, planning level-estimates to identify cost-effective options for addressing safety concerns. Estimated Cost: Benefit rankings are developed using planning level costs for projects of this nature. Individual project cost estimates will change as projects advance. See pages 4-5 of this report for more information about how the Safe Routes Program determines project prioritization and implementation.

Project ID	Nearby School(s)	Location	Issue	Recommendation + = parking removal required * = curb changes required ~ = private property acquisition required	Benefit Category	Cost:Benefit Category
4C - 646	BARRINGTON, GUERRERO THOMPSON	N LAMAR BLVD / W RUNDBERG LN	Difficult crossing	Add median refuge island on both legs of Rundberg Ln , Improve signal responsiveness to pedestrian push buttons , Install raised crosswalk [1] across free right on northeast corner	1 - Very High	1 - Very High
4C - 647	GUERRERO THOMPSON, BARRINGTON	N LAMAR BLVD / RUTLAND DR	Difficult crossing	Add median refuge island on north leg crossing of Lamar Blvd , Improve signal responsiveness to pedestrian push buttons	1 - Very High	1 - Very High
4C - 648	WOOLDRIDGE	PAYTON GIN RD / QUAIL CREEK DR	Difficult crossing	Add median refuge island on Payton Gin Rd , Add new curb ramp [2] , Install high visibility crosswalk [1] across Payton Gin Rd , Install Rapid Flashing Beacon [1]	1 - Very High	1 - Very High
4C - 649	WOOLDRIDGE	PARKFIELD DR / PAYTON GIN RD	Difficult crossing	Add median refuge island on Parkfield Dr and east leg of Payton Gin Rd , Add new curb ramp [1] , Install high visibility crosswalk [3] across Parkfield Dr & Payton Gin Rd	1 - Very High	1 - Very High
4C - 650	WOOLDRIDGE	HUNTERS TRCE / PAYTON GIN RD	Difficult crossing	Add median refuge island on Payton Gin Rd , Add new curb ramp [3] , Install high visibility crosswalk [3] across , Install Rapid Flashing Beacon	1 - Very High	1 - Very High
4C - 651	MCBEE	KRAMER LN / PARKFIELD DR	Difficult crossing, Non-compliant curb ramps	Increase pedestrian crossing time , Install high visibility crosswalk [4] across Kramer Ln & Parkfield Dr , Replace existing curb ramp [4] *	2 - High	1 - Very High
4C - 851	MCBEE	Near 11107 PLAINS TRL	School zone sign wrong color	Replace school zone sign	4 - Low	3 - Medium
4C - 853	MCBEE	Near 1001 BRAKER LN	No bike parking	Add bike parking ~	5 - Very Low	3 - Medium

DRAFT

Estimated Cost: Benefit rankings are preliminary, planning level-estimates to identify cost-effective options for addressing safety concerns. Estimated Cost: Benefit rankings are developed using planning level costs for projects of this nature. Individual project cost estimates will change as projects advance. See pages 4-5 of this report for more information about how the Safe Routes Program determines project prioritization and implementation.

Project ID	Nearby School(s)	Location	Issue	Recommendation + = parking removal required * = curb changes required ~ = private property acquisition required	Benefit Category	Cost:Benefit Category
4C - 854	PADRON	Near 1900 WEST LOOP	Water main access blocks sidewalk	Lower water main access to sidewalk level	5 - Very Low	4 - Low
4C - 855	PADRON	Near 1827 RUNDBERG LN	Missing sidewalk	Fill in missing sidewalk around fire hydrant	3 - Medium	2 - High
4C - 856	MCBEE	Near 1135 BRAKER LN	Fire department driveway gets blocked by parents in drop-off queue	Reinforce existing signage with painted XX pavement markings	5 - Very Low	4 - Low
4C - 857	MCBEE	Near 1100 KRAMER LN	Poor lighting	Add lighting to existing trail ~	4 - Low	2 - High
4C - 901	PADRON	Near 1625 RUTLAND DR	No trail connection	Add lighting, Add wayfinding , Construct new shared use path	1 - Very High	4 - Low
4C - 902	WOOLDRIDGE, PADRON	Near 1306 COLONY CREEK DR	No trail connection	Construct new shared use path	1 - Very High	5 - Very Low
4C - 903	PADRON	Near 2005 WEST LOOP	No trail connection	Add gate , Construct new shared use path ~	1 - Very High	4 - Low
4C - 904	MCBEE	Near 1001 BRAKER LN	No trail connection	Construct new shared use path	1 - Very High	1 - Very High

DRAFT

Estimated Cost: Benefit rankings are preliminary, planning level-estimates to identify cost-effective options for addressing safety concerns. Estimated Cost: Benefit rankings are developed using planning level costs for projects of this nature. Individual project cost estimates will change as projects advance. See pages 4-5 of this report for more information about how the Safe Routes Program determines project prioritization and implementation.