Late Backup ordinance no.

AN ORDINANCE REZONING AND CHANGING THE ZONING MAP FOR THE PROPERTY LOCATED AT 6401 RIALTO BOULEVARD IN THE EAST OAK NEIGHBORHOOD PLAN AREA FROM GENERAL **OFFICE-**HILL NEIGHBORHOOD PLAN (GO-NP) COMBINING DISTRICT TO MULTI **MODERATE** HIGH **DENSITY-CONDITIONAL** RESIDENCE FAMILY OVERLAY-NEIGHBORHOOD PLAN (MF-4-CO-NP) COMBINING DISTRICT.

BE IT ORDAINED BY THE CITY COUNCIL OF THE CITY OF AUSTIN:

PART 1. The zoning map established by Section 25-2-191 of the City Code is amended to change the base district from general office-neighborhood plan (GO-NP) combining district to multi family residence moderate high density-conditional overlay-neighborhood plan (MF-4-CO-NP) combining district on the property described in Zoning Case No. C14-2013-0044, on file at the Planning and Development Review Department, as follows:

46.70 acre tract of land, more or less, out of the Thomas Anderson Survey No. 17, the tract of land being more particularly described by metes and bounds in Exhibit "A" incorporated into this ordinance (the "Property"),

locally known as 6401 Rialto Boulevard in the City of Austin, Travis County, Texas, and generally identified in the map attached as Exhibit "B".

PART 2. Except as specifically provided in Part 3 and Part 4 of this ordinance, the Property may be developed and used in accordance with the regulations established for the multi family residence moderate high density (MF-4) base district and other applicable requirements of the City Code.

PART 3. The Property within the boundaries of the conditional overlay combining district established by this ordinance is subject to the following conditions:

- A. Development of the Property shall not exceed an average of 17 residential units per acre.
- B. Development of the Property shall not exceed 450 residential units.
- C. Development of the Property shall comply with the following regulations:

Draft 10/3/2013

2

3

5

6 7

8 9

10

11

12

13

14 15

16

17

18 19

20

21 22

23

24

25

26 27

28

29 30

31

32 33

34 35

36 37


COA Law Department

Item # 72

1. The minimum lot size is 8,000 square feet.

Draft 10/3/2013

COA Law Department

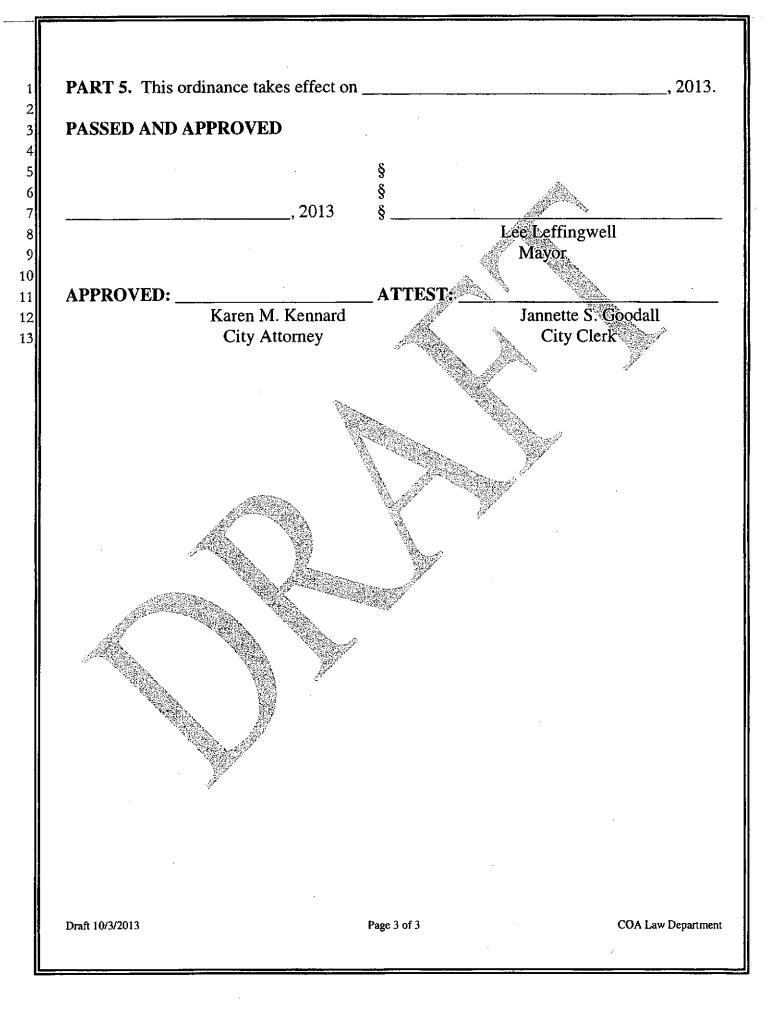

 MAY 17, 2012
 JOB NO. 1358-01
 FIELD NOTE NO. 1358-01

 CLIENT: STRATUS PROPERTIES INC.
 PROJECT: TRACT 32, GO(5)

 C.O.A. GRIDS C-20, C-21 & D-20

FIELD NOTES

A DESCRIPTION OF 46.701 ACRES OF LAND SITUATED IN THE THOMAS ANDERSON SURVEY NO. 17, TRAVIS COUNTY, TEXAS, BEING A PORTION OF THAT CERTAIN 251.2047 ACRES OF LAND, DESIGNATED TRACT 2, CONVEYED TO STRATUS PROPERTIES OPERATING CO. BY DEEDS RECORDED IN VOLUME 12115, PAGE 3593 AND VOLOME 13237, PAGE 79 OF THE REAL PROPERTY RECORDS OF SAID COUNTY, SAID 46.701 ACRES AS SHOWN ON THE ACCOMPANYING SKETCH BEING MORE PARTICULARLY DESCRIBED BY METES AND BOUNDS AS FOLLOWS:

BEGINNING at a 5/8 inch iron rod with plastic cap marked "RPLS 4532" set for the most northeasterly corner of Rialto Boulevard, (80 foot wide R.O.W.) dedicated by Rialto Park at Lantana, a subdivision whose plat is recorded in Document No. 200100096 of the Official Public Records of said county on the south R.O.W. line of Southwest Parkway (R.O.W. varies) dedicated by Volume 10559, Page 1 and Volume 10559, Page 18 of said Real Property Records on the north line of said Tract 2;

THENCE along the south R.O.W. line of said Southwest Parkway and said north line the following four (4) courses:

- a distance of 141.53 feet along the arc of a curve to the right whose radius is 1740.00 feet, central angle is 04°39′30″ and whose chord bears \$71°07′07″E, 141.49 feet to a 5/8 inch iron rod with plastic cap marked "RPLS 4532″ found,
- S60°47'14"E, 530.13 feet to a 5/8 inch iron rod with plastic cap marked "RPLS 4532" set for a point of curvature,
- 3. a distance of 715.20 feet along the arc of a curve to the right whose radius is 11400.00 feet, central angle is 03°35'40" and whose chord bears S66°59'23"E, 715.09 feet to a 5/8 inch iron rod with plastic cap marked "RPLS 4532" set, and
- S65°12'02"E, 462.32 feet to an "X" marked in concrete found for a point of curvature on the west R.O.W. line of Vega Avenue, a variable width R.O.W.;

THENCE, departing said south R.O.W. line and said north line, along the west R.O.W. line of said Vega Avenue and the east line of said Tract 2 the following six (6) courses:

1. a distance of 33.00 feet along the arc of a curve to the right whose radius is 20.00 feet, central angle is

Page 1 of 4

Field Note No. 240-01

94°32'23" and whose chord bears S17°54'15"E, 29.38 feet to a 1/2 inch iron rod found,

- S29°24'01"W, 208.28 feet to a 5/8 inch iron rod with plastic cap marked "RPLS 4532" set for a point of 2. curvature,
- a distance of 47.09 feet along the arc of a curve to the left whose radius is 945.00 feet, central angle is з. $02^{\circ}51'19''$ and whose chord bears $327^{\circ}58'20''W$, 47.09 feet to a 5/8 inch iron rod with plastic cap marked "RPLS 4532" set,
- S26°32'40"W, 483.85 feet to a 5/8 inch iron rod with plastic cap marked "RPLS 4532" found, 4.
- S63°27'24"E, 15.25 feet to a 5/8 inch iron rod with plastic cap marked "RPLS 4532" set, and 5.
- S26°30'41"W, 605.97 feet to a calculated point from which a 5/8 inch iron rod in concrete found bears 6. \$26°30'41"W, 352.17 feet,

THENCE, departing said east line and said west R.O.W. line, crossing said Tract 2 the following twenty-seven (27) courses:

- 1. N28°00'09"W, 62.29 feet to a calculated point,
- 2. N05°30'15"W, 92.57 feet to a calculated point.
- з. N14°58'32"E, 20.21 feet to a calculated point,
- N31°07'19"E, 52.94 feet to a calculated point, 4.
- N13°17'08"W, 24.54 feet to a calculated point, 5.
- б. N49°20'05"W, 43.61 feet to a calculated point,
- 7. N46°55'42"W, 18.61 feet to a calculated point.
- 8. N58°44'04"W, 49.93 feet to a calculated point,
- N50°35'39"W, 28.13 feet to a calculated point, 9.
- 10.
- N33°14'22"W, 70.35 feet to a calculated point,
- 11. N47°56'52"W, 34.79 feet to a calculated point,
- N64°50'25"W, 38.54 feet to a calculated point, 12.
- N82°42'42"W, 30.13 feet to a calculated point, 13.

Page 2 of 4

{W0551068.1}

Field Note No. 240-01

14. S73°05'58"W, 51.00 feet to a calculated point,

15. N63°48'30"W, 18.05 feet to a calculated point,

16. N19°45'18"W, 107.01 feet to a calculated point,

17. N42°43'27"W, 34.65 feet to a calculated point,

18. N58°05'02"W, 28.89 feet to a calculated point,

19. N85°28'59"W, 122.58 feet to a calculated point,

20. N76°11'43"W, 21.77 feet to a calculated point,

21. N63°12'19"W, 35.48 feet to a calculated point,

22. N50°33'03"W, 30.18 feet to a calculated point,

23. N40°27'58"W, 72.22 feet to a calculated point,

24. N58°25'47"W, 40.52 feet to a calculated point,

25. N82°27'29"W, 42.12 feet to a calculated point,

26. S89°14'14"W, 301.07 feet to a calculated point, and

27. N82°00'38"W, 28.78 feet to a 5/8 inch iron rod with plastic cap marked "RPLS 4532" found for the most easterly corner of Lot 9, Block A of said Rialto Park at Lantuna;

THENCE continuing across said Tract 2 along the north line of said Lot 9 the following seven (7) courses:

- N62°44'16"W, 31.46 feet to a 5/8 inch iron rod with plastic cap marked "RPLS 4532" found,
- N62°22'00"W, 31.66 feet to a 5/8 inch iron rod with plastic cap marked "RPLS 4532" found,
- N37°01'04"W, 31.20 feet to a 5/8 inch iron rod with plastic cap marked "RPLS 4532" found,
- N28°50'25"W, 78.81 feet to a 5/8 inch iron rod with plastic cap marked "RPLS 4532" found,
- 5. N35°11'33"W, 42.83 feet to a MAG nail found,
- N50°11'55"W, 48.99 feet to a 5/8 inch iron rod with plastic cap marked "RPLS 4532" found, and

Page 3 of 4

{W0551068.1}



,

Field Note No. 240-01

 N31°27'38"W, 264.84 teet to a 5/0 inch iron rod with plastic cap marked "RPLS 4532" found on the east R.O.W. line of said Rialto Boulevard;

THENCE, departing said south line and said north line, continuing across said Tract 2 along said east R.O.W. line the following three (3) courses:


- a distance of 355.44 feet along the arc of a curve to the left whose radius is 640.00 feet, central angle is 31°49'14" and whose chord bears N26°17'03"E, 350.89 feet to a 5/8 inch iron rod with plastic cap marked "RPLS 4532" set for a point of tangency,
- N10°22'26"E, 588.36 feet to a 5/8 inch iron rod with plastic cap marked "RPLS 4532" found for a point of curvature, and
- 3. a distance of 33.57 feet along the arc of a curve to the right whose radius is 20.00 feet, central angle is 96°10'39" and whose chord bears N58°27'45"E, 29.77 feet to the POINT OF BEGINNING containing 46.701 acres of land more or less.

K. 2.4. R

Page 4 of 4

(W0551068.1)

A-1-5

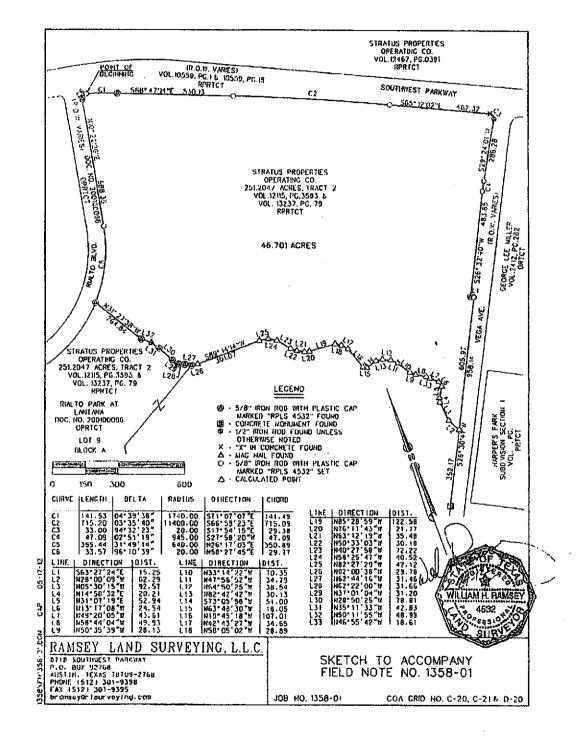

C

.

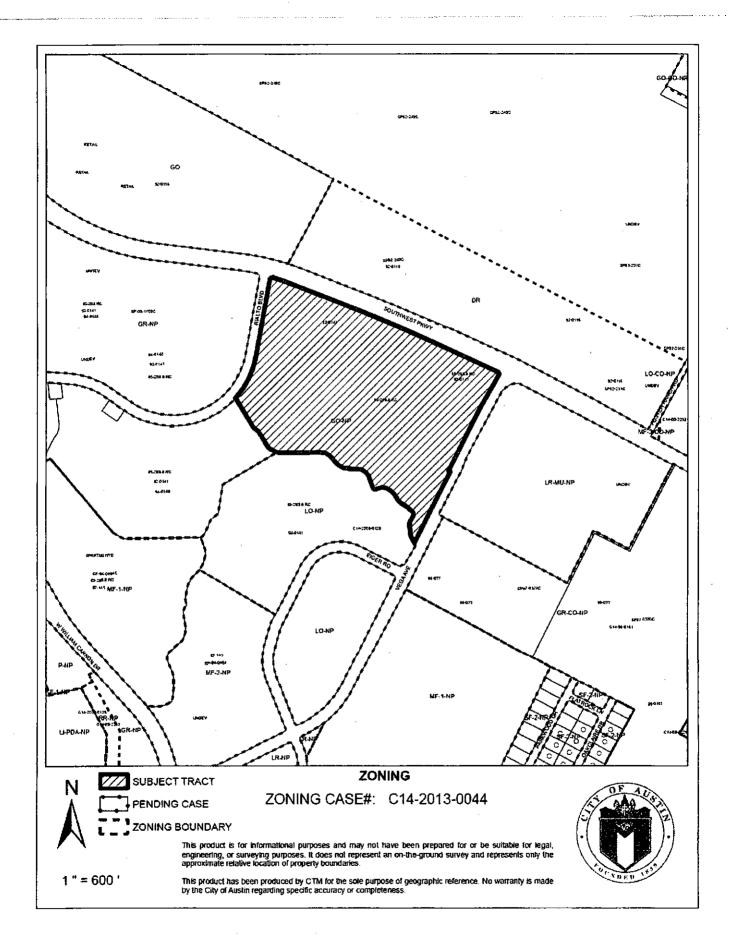


Exhibit B